

Copeland ZX A2L outdoor refrigeration units

Copeland ZX outdoor refrigeration units for A2L refrigerants offer additional benefits for wholesalers, installers and operators.

With this range of ZX outdoor refrigeration units, Copeland offers a low GWP solution for refrigeration applications with space and noise constraints which responds to the increasing demand for energy-efficient and future-proof refrigeration solutions.


Copeland ZX units feature the most complete and unique equipment. The modified design, the innovative control logic and a selection of dedicated components enable legal compliance for applications with A2L refrigerants. The advanced electronic controller enables precise parameter control and displays the system status. Electronic protection functions, oil separator and suction accumulator guarantee optimum system safety. The range is completed by models with stepless digital capacity modulation which are well established in applications with multiple evaporators and precise temperature control.



Copeland series of outdoor refrigeration units are specifically designed to cater for a wide range of refrigeration applications which request a low GWP and future-proof solution:

- Convenience stores
- Cold rooms
- Fast food chains and restaurants
- Bakeries and butchers

Copeland ZX line-up for A2L refrigerants

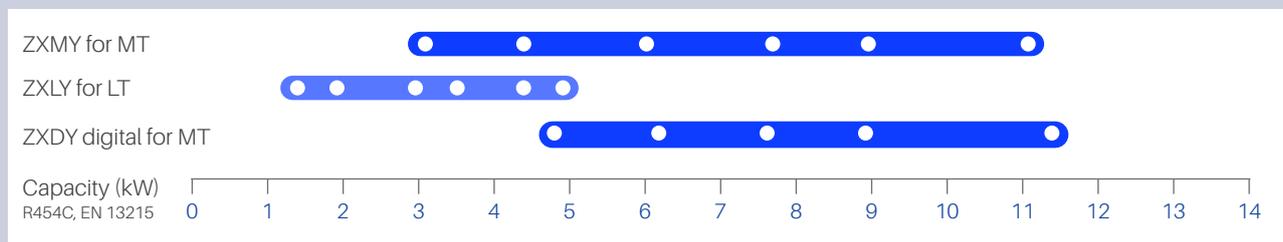

Technical overview

Model	Displacement (m ³ /h)	Receiver Capacity (l)	Number of fans	Total Fan Motor Power (W)	Suction Line Diameter (inch)	Liquid Line Diameter (inch)	Width/Depth/Height (mm)	Net Weight (kg)	Motor Version/Code	Maximum Operating Current (A)	Locked Rotor Current (A)	Sound Pressure @10m - d(BA) **
									3 Ph*	3 Ph*	3 Ph*	
Medium Temperature Models												
ZXMY-020E	5.8	4.1	1	115	3/4	1/2	446/1035/840	76	TFM	4	26	37
ZXMY-030E	8.0	4.1	1	115	3/4	1/2	446/1035/840	79	TFM	6	32	38
ZXMY-040E	11.4	4.1	1	115	3/4	1/2	446/1035/840	91	TFM	8	50	38
ZXMY-050E	14.3	5.9	2	230	7/8	1/2	446/1035/1244	108	TFM	10	64	41
ZXMY-060E	16.7	5.9	2	230	7/8	1/2	446/1035/1244	112	TFM	12	74	41
ZXMY-075E	21.4	5.9	2	230	7/8	1/2	446/1035/1244	118	TFM	16	102	41
Digital Medium Temperature Models												
ZXDY-030E	8.8	4.1	1	115	3/4	1/2	446/1035/840	79	TFM	7	40	39
ZXDY-040E	11.4	5.9	2	230	7/8	1/2	446/1035/1244	106	TFM	10	48	42
ZXDY-050E	14.4	5.9	2	230	7/8	1/2	446/1035/1244	108	TFM	11	64	42
ZXDY-060E	17.1	5.9	2	230	7/8	1/2	446/1035/1244	112	TFM	12	74	43
ZXDY-075E	21.4	5.9	2	230	7/8	1/2	446/1035/1244	118	TFM	16	102	43
Low Temperature Models												
ZXLY-020E	5.9	4.1	1	115	3/4	1/2	446/1035/840	74	TFD	7	25	37
ZXLY-030E	8.0	4.1	1	115	3/4	1/2	446/1035/840	81	TFD	8	36	37
ZXLY-040E	11.8	4.1	1	115	3/4	1/2	446/1035/840	87	TFD	10	47	38
ZXLY-050E	14.4	5.9	2	230	7/8	1/2	446/1035/1244	113	TFD	12	58	41
ZXLY-060E	17.1	5.9	2	230	7/8	1/2	446/1035/1244	115	TFD	15	67	41
ZXLY-075E	21.4	5.9	2	230	7/8	1/2	446/1035/1244	121	TFD	19	92	42

* 3ph: 380-420V/ 50Hz

** @ 10m: sound pressure level at 10m distance from the compressor, free field condition

Features and benefits

Standard equipment

- Copeland scroll compressor, crankcase heater, liquid receiver, service valves, filter drier, and sight glass
- Dedicated hermetic A2L design with sealed E-box and fresh air intake control logic
- External main power switch
- Fan speed control
- Oil separator (digital and LT version)
- Suction accumulator (LT version only)

Wide choice of low GWP refrigerants

- Multiple A2L refrigerants approved: R454A, R454C, R455A, R1234yf
- Compatible with A1 refrigerants: R404A, R407A, R407F, R448A, R449A, R134a, R450A, R513A
- Enabling F-Gas compliance
- Enabling Eco-design compliance

Quiet operation

- Copeland scroll compressor
- New fans with improved sound level
- Fan speed control

Minimized operating costs


- High efficiency Copeland scroll compressor
- Digital capacity modulation (ZX digital)
- Speed modulating high efficiency fan
- Intelligent protection and diagnostics

Reduced service costs

- Easy access to all components
- Scroll liquid handling capability for higher reliability than reciprocating technology
- Wider operating envelope of scroll than reciprocating technology

Designed for time and space saving installations

- Plug & Play installation/commissioning
- Hinged door for better access
- Easy handling through compact & light weight design
- Perfect for wall mount or roof mount applications

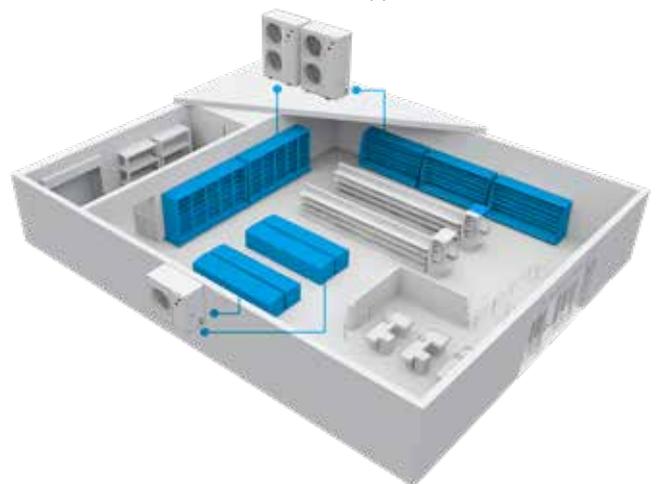

For more details, see copeland.com/en-gb

Copeland Europe GmbH - Pascalstrasse 65 - 52076 Aachen, Germany
Tel. +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: copeland.com/en-gb

The Copeland logo is a trademark and service mark of Copeland LP or one of its affiliates. Copeland Europe GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors. Products, specifications, assumptions, designs and technical data contained in this document are subject to modification by us without prior notice. Illustrations are not binding. ©2024 Copeland LP. All rights reserved.

COPELAND
Engineered for Sustainability