

# GO PDF Mini Logger

Temperature Monitoring Logger in Compact Size

## Temperature Monitoring

The GO PDF Mini loggers monitor time and temperature of perishable products during distribution and storage. These easy-to-use loggers eliminate the need for reading devices and proprietary software and are optimal for applications requiring fully independent operation – simply activate and place with your shipment.

Due to their small size, the GO PDF Mini Loggers are versatile and feature a USB connection which can be plugged directly into the USB port of a computer. Once connected, the logger automatically generates a PDF file containing complete time, temperature history including graphs and summary data, as well as a complete table of all temperature readings during shipment. For added convenience, GO PDF Mini also automatically generates a CSV file.

## GO PDF Mini General Use


GO PDF Mini Loggers provide basic temperature monitoring data. Loggers feature a typical accuracy range of +/- 0.5°C between -20°C to 40°C (-4°F to 104°F) over the operating range of -30°C to 70°C (-22°F to 158°F). GO PDF Mini loggers can record data for either 15, 60 or 90 days and function as a data logger only with no alerting capabilities.



-  Small, flat, waterproof recorder
-  Digitally records time and temperature data
-  Unique design plugs directly into USB port; generates PDF data file
-  Full independent operation - eliminates readers and software
-  Great for monitoring exports/imports and worldwide shipments

## Technical Specifications

<b>Alarm Indicators:</b>	No (historical data logger only)
<b>Battery:</b>	UN38.3 compliant
<b>Certifications:</b>	FCC, CE, RoHS, EN12830
<b>CSV file:</b>	Yes
<b>Export to Other Applications:</b>	Generates PDF
<b>In-Use Life:</b>	15, 60, 90 days (3, 12 and 20 min recording intervals, respectively)
<b>IP Rating:</b>	IP67
<b>Marking Capabilities:</b>	No
<b>Operating Environment:</b>	-30°C to 70°C (-22°F to 158°F)
<b>Operating System:</b>	Windows 32 bit, 64 bit
<b>Recording Interval:</b>	Every five minutes
<b>Resolution:</b>	0.1 °C
<b>Shelf Life:</b>	15 months
<b>Size:</b>	0.87 in x 2.95 in (22 mm x 75 mm) without pouch
<b>Start Delay:</b>	30 minutes
<b>Stop Button:</b>	No
<b>Temperature Accuracy:</b>	±0.5°C typical between -20°C to 40°C (-4°F to 104°F) ±1.0°C (other ranges)
<b>Time Zone:</b>	Reconciled to UTC
<b>Weight:</b>	12.00 g (0.42 oz)

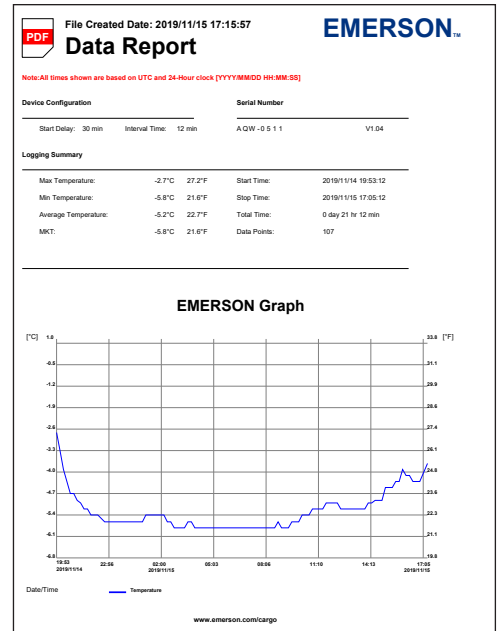

PDF Example

## Contact Information

+1 (877) 998-7299  
CargoSolutions@Emerson.com