

Superheat controller EXD-HP1/2 and electronic expansion valve EXM/L

*The first stand-alone proven and reliable solution
for wet / vapor injection*



Universal superheat / Economizer controller.

EXD-HP1/2 are state-of-the-art drivers for superheat and economizer control and can be applied to standard systems such as heating, heat pumps, air conditioning, chillers, rooftops, package units and close control. EXM / EXL are unipolar stepper motor driven electronic expansion valves primarily designed for accurate refrigerant mass flow control within wide operating ranges of capacity and differential pressure. EXD-HP1 drives one EXM/EXL electronic expansion valve, whereas EXD-HP2 drives two independent EXM/EXL valves. The economizer control is a combination of two linked control loops i.e. superheat control or discharge hot gas temperature control. The injection method can be with vapor only or with wet/vapor refrigerant.

EXD-HP1/2 controllers features

- Plug and operate: Self adapting routine algorithms eliminate the need for PID adjustment of different operating modes or systems.
- Stand-alone automated control
- ModBus (RTU) communication capability (as slave)
- Limitation of evaporating pressure (MOP)
- Low pressure switch function/alarm
- Discharge hot gas temperature limit alarm
- Monitoring of sensors, sensor wiring and detection of sensor and wiring failures
- Integrated LED display and keyboard
- Key for down and up loading of settings for serial production



EXM/L valves feature

- Valve and driver are harmonized for best-in-class performance
- Capable of 40 bar MOPD in normal flow direction
- Maximum allowable pressure of 45 bar
- Reliable: Life expectancy of 225 million pulses
- Bi-flow capability with equal capacity in both flow directions
- High resolution

EXM/EXL data

Type	PCN	Nominal capacity, kW			
		R410A	R407C	R22	R134a
EXM-BOB	800 400M	5.5	5.0	4.8	3.7
EXM-BOD	800 401M	11.6	10.5	9.9	7.7
EXM-BOE	800 402M	13.7	12.4	11.8	9.1
EXL-B1F	800 405M	17.0	15.4	14.6	11.3
EXL-B1G	800 406M	23.0	20.7	19.7	15.2



PT5-xxM



PT6-xxM




PT5-xxT



PT4-Mxx

Application envelope

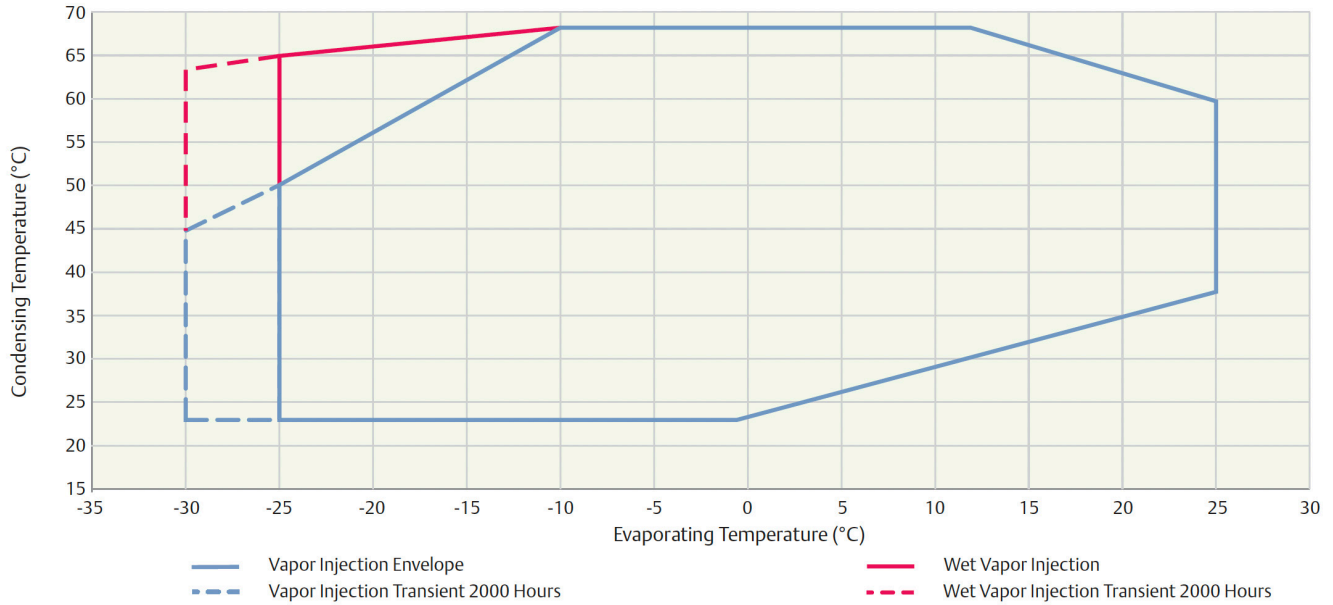

Solutions for variety of systems


System	Economizer heat exchangers to be managed	Indoor / outdoor heat exchanger to be managed	Managed by
Heating or cooling only	-	1	EXD-HP1
Heating	1	-	EXD-HP1
Heating split system (outdoor)	-	1	EXD-HP1
Heat pump	1	2	EXD-HP2
Heating split system	1	1	EXD-HP2
Heating package system	1	2 (connected to valve)	EXD-HP2

Typical ordering package

Description	Type	PCN M = Multipack (20 pieces)
Controller with one EXV output	EXD-HP1	807 836M
Controller with two EXV outputs	EXD-HP2	807 837M
Temperature sensor with 3 meter cable	ECP-P30	804 495
Pressure sensors (suction pressure)	PT5-07M / PT5-07T	802 350M / 802 370M
- 0.8...7 bar (R22, R134a, R407C)	PT5-18M / PT5-18T	802 351M / 802 371M
- 0.....18 bar (R410A, R32)	PT6-18M	802 361M
Recommended for intermediate pressure (economizer control)	PT5-30M / PT5-30T	802 352M / 802 372M
Plug and cable assembly for pressure sensor		
- 1.5m cable length	PT4-M15	804 803M
- 3.0m cable length	PT4-M30	804 804M



Application example: reversible heat pump for R410A with economizer

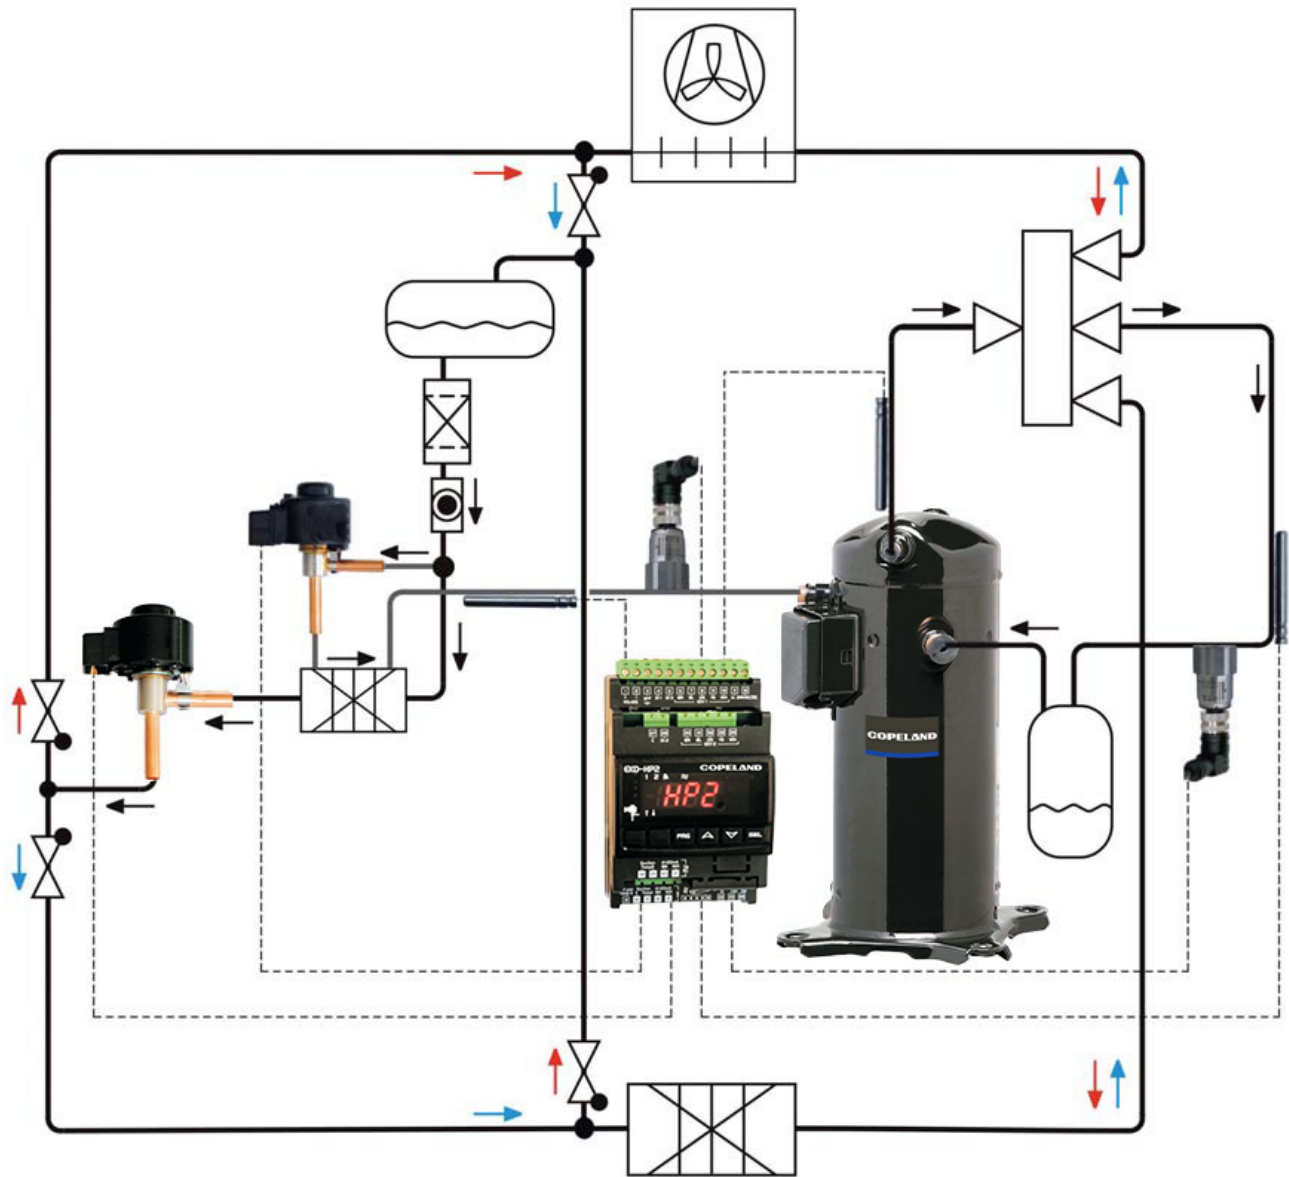

For more details, see copeland.com/en-gb

Copeland Europe GmbH
Pascalstrasse 65 - 52076 Aachen, Germany
Tel. +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: copeland.com/en-gb
The Copeland logo is a trademark and service mark of Copeland LP or one of its affiliates.
Copeland Europe GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors.
Products, specifications, assumptions, designs and technical data contained in this document are subject to modification
by us without prior notice. Illustrations are not binding.
©2024 Copeland LP.

COPELAND
Engineered for Sustainability