



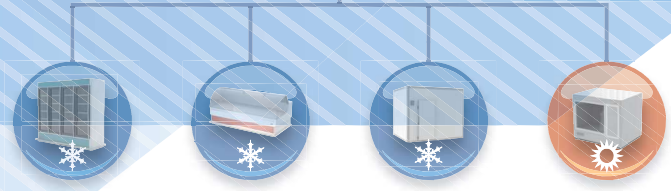

CX: 32x74mm



UNIVERSAL-R: HEATING APPLICATIONS, NT and LT 7 PRE-CONFIGURED MAPS

- Designed to replace over 150 models of refrigeration/heating controllers in 32x74mm format
- Easy and quick installation
- Rapid set-up in 3 simple steps
- Dual voltage power supply 12Vac/dc and 230Vac
- Specific functions to control twin evaporator defrost
- Automatic probe detection
- Complete condenser management
- Hot Key or Prog Tool Kit connector for quick and easy programming
- 3VA max power absorption
- Display with red LED (10,5 mm high) and icons
- 7 pre-configured applications selectable from parameter **tC**

tC1 = on/off thermostat - cooling

tC2 = thermostat with off cycle defrost

tC3 = thermostat with electric/hot gas defrost, time initiated and time terminated

tC4 = thermostat with electric/hot gas defrost, time initiated and temperature terminated

tC5 = thermostat with electric/hot gas defrost, time initiated and temperature terminated and evaporator fan

tC6 = twin evaporator defrost applications

tC7 = on/off thermostat - heating

HOW to ORDER

UNIVERSAL-R U N I V - R 4 - 6 B 1 D 0

Inputs	Measurement unit
P = PTC	C = °C
N = NTC	F = °F