

Copeland scroll ZX condensing unit

For refrigeration applications.





ZX condensing unit for refrigeration applications.

Copeland offers the ZX platform refrigeration condensing units specifically designed for medium temperature (ZX-MT & ZXB-MT), low temperature (ZXL-LT), digital modulated variable capacity medium temperature and low temperature (ZXD-MT & ZXLD-LT) refrigeration.

ZX series CDU has been highly successful in the Asian market and enjoys proven success with its energy savings and customer-friendly electronic features.

ZX Platform Condensing Unit was designed based on three factors demanded by industry users:


Intelligent store solutions – A most innovative approach to enterprise facility management, Copeland’s Intelligent Store architecture integrates hardware and services to provide retailers a single view into their entire network of facilities and understanding what facilities actually cost to operate and maintain. The Intelligent Store architecture transforms data from store equipment and controls into actionable insights. Designed to deliver value in both new and existing stores, Emerson aims to help retailers:

- Make better decisions on resources investment for maximum impact
- Receive accurate feedback and service customized to meet your specific needs
- Reduce operational costs and boost the profitability

Energy efficiency–Utilizing Copeland scroll compressor technology, variable speed fan motor, large capacity condenser coil and advanced control algorithms, energy consumption is significantly reduced. End-users can save more than 20% on annual energy costs compared to using hermetic reciprocating units.



Reliability – Combining the proven reliability of Copeland scroll compressors with advanced electronics controller and diagnostics, equipment reliability is greatly enhanced. Fault code alerts and fault code retrieval capabilities provide information to help improve speed and accuracy of system diagnostics. Integrated electronics provide protection against over-current, overheating, incorrect phase rotation, compressor cycling, high pressure resets and low pressure cut-outs. It can also send out a warning message to the operator when there is liquid floodback, which can prevent critical damage to the unit.

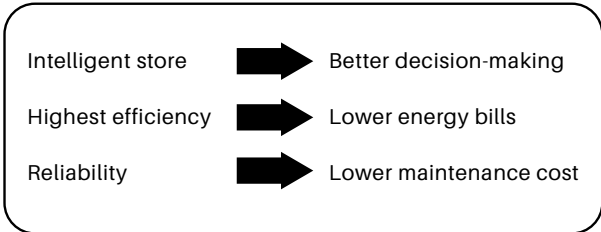

Features and benefits	04
Nomenclature	05
Bill of material	05
Copeland Controller for ZX Platform condensing unit	06
Operating envelopes	07
ZX Family: Medium temperature	07
ZXB Family: Medium temperature	07
ZXD Family: Digital medium temperature	07
ZXL/ZXLD Family: Low temperature	08
Performance data	
ZX Family: Medium temperature - R22	09
ZX Family: Medium temperature - R404A (R507A)	11
ZX Family: Medium temperature - R407F	13
ZXB Family: Medium temperature - R134a	15
ZXD Family: Digital medium temperature - R22	16
ZXD Family: Digital medium temperature - R404A (R507A)	18
ZXD Family: Digital medium temperature - R407F	20
ZXL Family: Low temperature - R22	22
ZXL Family: Low temperature - R404A (R507A)	24
ZXLD Family: Low temperature R404A (R507A)	25
ZXL Family: Low temperature - R404A (R507A)	26
ZXL Family: Low temperature - R407F	27
Technical data	
ZX Family: Medium temperature at 50 Hz - PFJ	29
ZX Family: Medium temperature at 50 Hz - TFD	30
ZX Family: Medium temperature at 60 Hz - PFV/ TF5/TF7	31
ZXB Family: Medium temperature at 50 Hz - TFD	32
ZXD Family: Digital medium temperature at 50 Hz - TFD	33
ZXD Family: Digital medium temperature at 60 Hz - TF5/TF7	34
ZXL Family: Low temperature at 50 Hz - PFJ	35
ZXL Family: Low temperature at 50 Hz - TFD	36
ZXLD Family: Low temperature at 50 Hz - TFD	37
ZXL Family: Low temperature at 60 Hz - PFV/ TF5/TF7	38
Dimensional drawings	39
Packing information	40
Conversion chart	40
Pressure temperature chart at sea level	41
Contact lists	43

ZX Condensing Unit

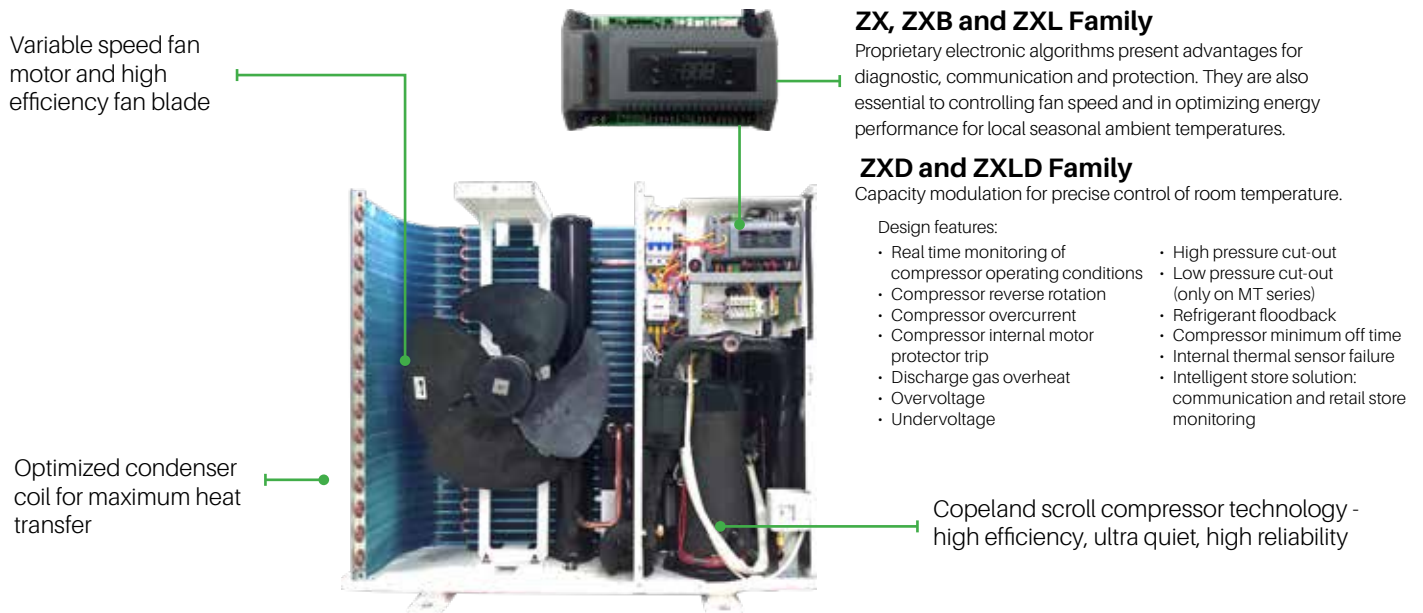


Figure 1. ZX Platform CDU features

ZX, ZXB and ZXL Family

Proprietary electronic algorithms present advantages for diagnostic, communication and protection. They are also essential to controlling fan speed and in optimizing energy performance for local seasonal ambient temperatures.

ZXD and ZXLD Family

Capacity modulation for precise control of room temperature.

Design features:

- Real time monitoring of compressor operating conditions
- Compressor reverse rotation
- Compressor overcurrent
- Compressor internal motor protector trip
- Discharge gas overheat
- Overvoltage
- Undervoltage
- High pressure cut-out
- Low pressure cut-out (only on MT series)
- Refrigerant floodback
- Compressor minimum off time
- Internal thermal sensor failure
- Intelligent store solution: communication and retail store monitoring

Copeland scroll compressor technology - high efficiency, ultra quiet, high reliability

Features	Owner/Enterprise Benefits
Intelligent store solution	<ul style="list-style-type: none"> • Retail store monitoring • Enhanced energy savings • High-end food safety through real time monitoring
Energy saving	<ul style="list-style-type: none"> • Lower operating costs
Diagnostic protection capabilities	<ul style="list-style-type: none"> • Greatly reduces the chance of nuisance service calls • Extends the life of your equipment • Reduces potential service costs • Keeps equipment operating at their original performance levels to ensure optimum energy efficiency and temperature control • Serves as a guide to what the contractor needs to fix in case of malfunction
Slim profile, lighter weight and optional wall mount capability	<ul style="list-style-type: none"> • Lower installation costs • Enhances the appearance of your enterprise site • Avoids more costly solutions arising from potential location issues
Sound improvement	<ul style="list-style-type: none"> • Creates a more comfortable environment for guests • Beneficial for regions with noise ordinances

Nomenclature

ZX	L	020	B	E	-	TFD	-	451
Unit family	Blank = Medium temp B = R134a Medium temp L = Low temp D = Digital medium temp LD = Digital low temp	2 - 20 HP	Generation	E = Ester oil O = Mineral oil		PFJ = 220V/240V - 1ph - 50 Hz PFV = 208V/230V - 1ph - 60Hz TFD = 380V/420V - 3ph - 50 Hz TF5=200V/230V - 3ph - 60 Hz TF7 = 380 - 3ph - 60 Hz		Bill of material
Base model						Electrical code		Bill of material

Bill of material

CDU Family BOM	ZX 2-7.5HP				ZXB 2-7.5HP		ZXL 2-7.5HP		ZXD 3-7.5HP				ZXD090BE			ZXL090BE		ZXD100HE		ZXL100HE		ZXD120BE		ZXL160BE		ZXL 12-16HP		ZXD/ZXL 20HP	
	401 501	451 551	462	481 581	401	451	451 551	462	451 551	462	481 581	451 551	462	581	451 551	481 581	555	585	555	585	551 521	581	551 521	581	551 521	581	551 521	581	
Liquid Line Filter Dryer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Liquid Line Moisture Indicator	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Liquid Receiver	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Oil Separator		✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Accumulator							✓	✓							✓	✓			✓	✓					✓	✓	✓	✓	
LP Transducer			✓					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
HP Transducer																					✓	✓	✓	✓	✓	✓	✓	✓	
Fixed LP Switch	✓	✓	✓					✓	✓		✓	✓			✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	
Adjustable LP Switch	✓	✓		✓	✓	✓	✓	✓	✓	✓				✓	✓					✓	✓					✓	✓	✓	
Fixed HP Switch	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Copeland Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Digital Modulation									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Fan Speed Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Intelligent Store Solution Module	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Bluetooth & APP																		✓	✓	✓	✓								
Circuit Breaker	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Sound Jacket	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Low Ambient Kit				✓							✓				✓			✓			✓			✓			✓	✓	
Liquid Injection	✓	✓	✓	✓					✓	✓	✓										✓	✓							
Enhanced Vapor Injection					✓	✓	✓	✓						✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓	✓	
Electronic Oil Level Protective Control																					✓	✓	✓	✓	✓	✓	✓	✓	

Copeland Controller for ZX platform condensing unit


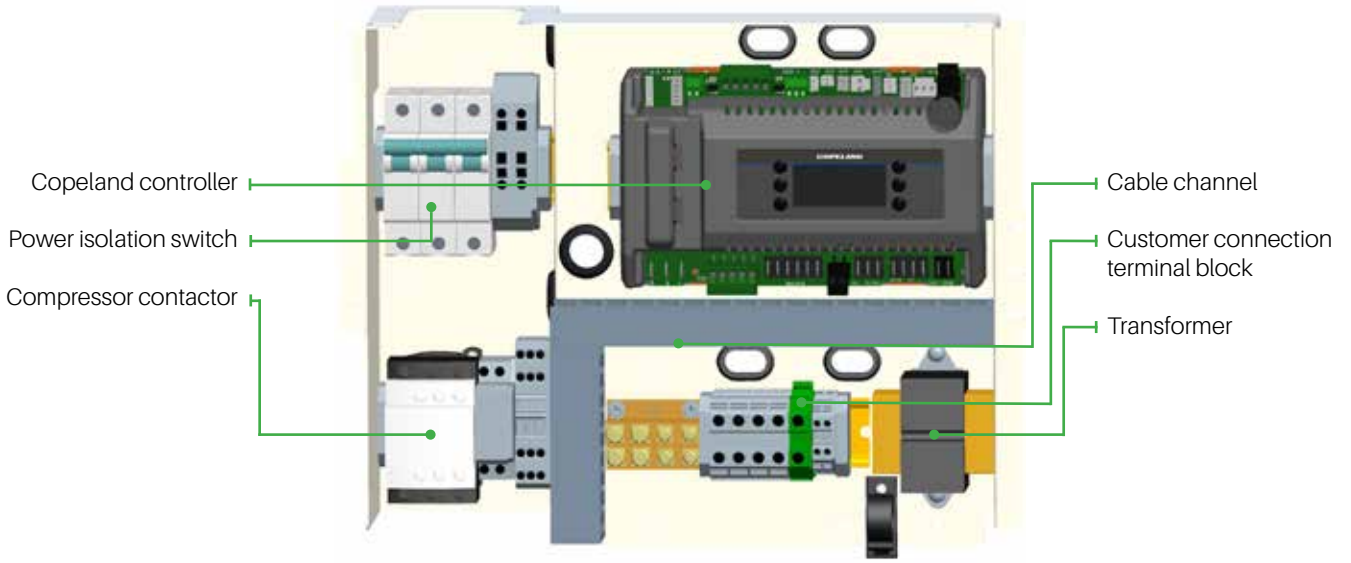


Figure 2. Layout of the control box

Controller layout

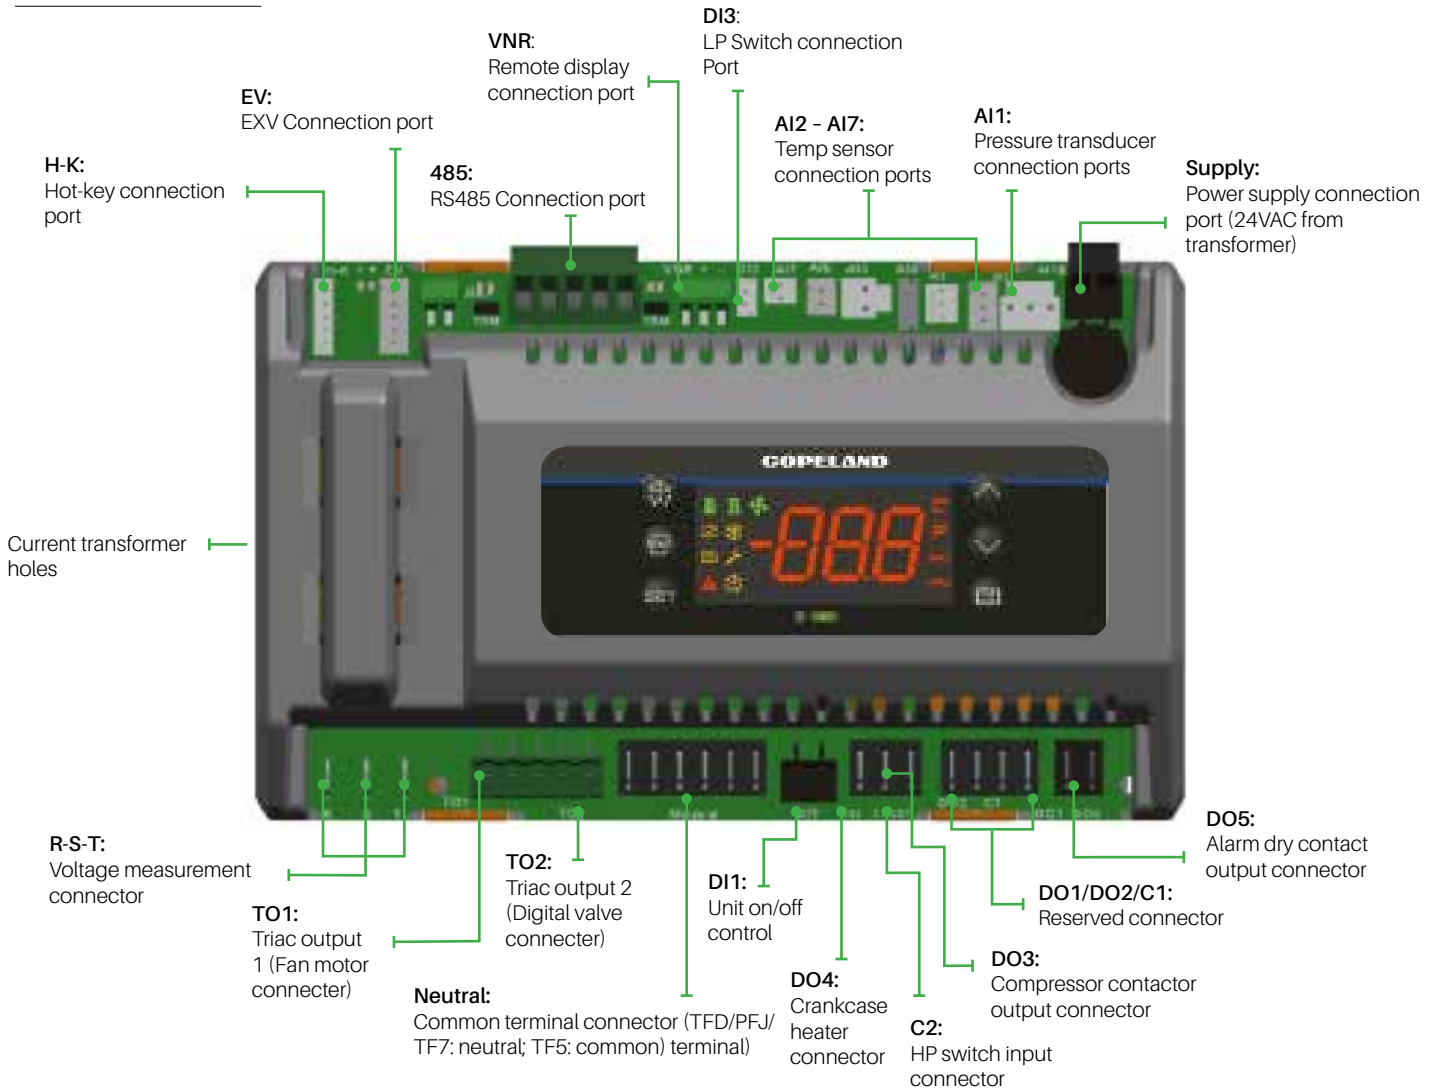


Operating envelopes

ZX Family: Medium temperature


ZX Medium Temperature at 50 Hz - PFJ / TFD

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C

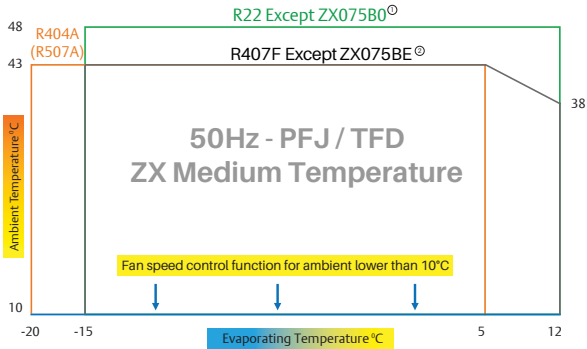

ZX Medium Temperature at 60 Hz - PFV/TF5/TF7

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C

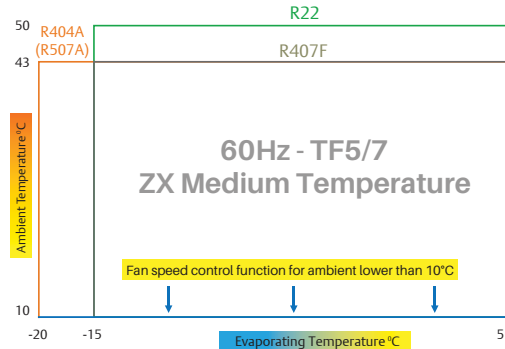


NoteⓄ: For model ZX075B0 (R22) Max Amb: 43°C, Max Evap: 5°C
NoteⓄ: For model ZX075BE (R407F) Max Evap: 5°C

ZXB Family: Medium temperature

ZXB Medium Temperature at 50 Hz - TFD


Refrigerant - R134a
Maximum Suction Gas Temperature: 20°C

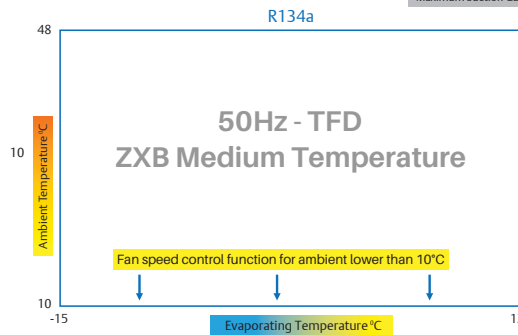

ZXD Family: Digital medium temperature

ZXD Digital Medium Temperature at 50 Hz - TFD
at 60 Hz - TF5/7

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C
(R22 50Hz-TFD is with 10K SH)

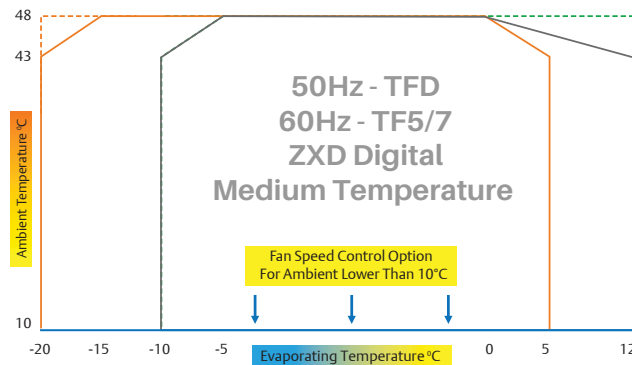


Note: For model ZXD075B0/E Max Amb: 43°C, Max Evap: 5°C


Operating envelopes

ZXL/ZXLD Family: Low temperature


ZXL/ZXLD Low Temperature at 50 Hz - TFD Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20 °C

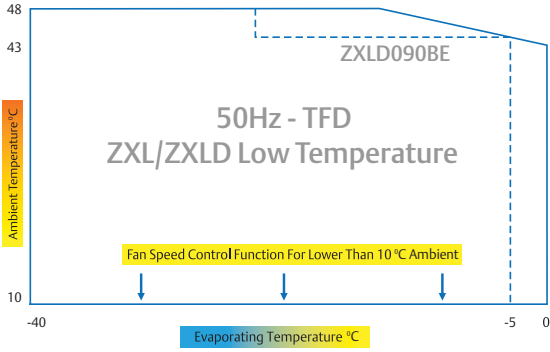

ZXL Low Temperature at 60 Hz - PFV/TF5/TF7 Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20 °C

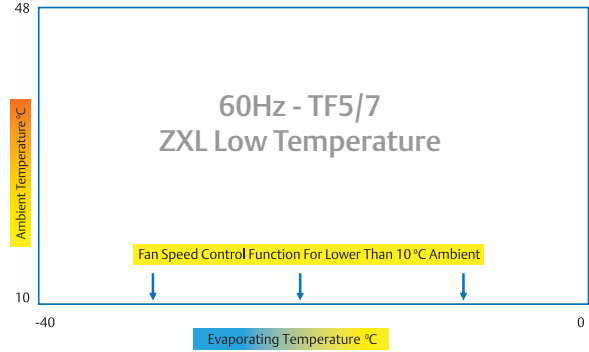

Guideline for using low ambient units

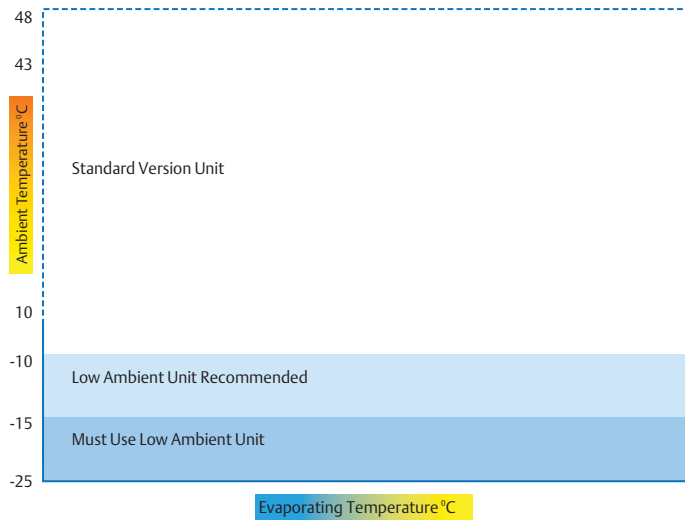

Note: For applications under -25°C ambient temperature, please contact Application Engineering.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX020B0	27	2.84	3.61	4.18	4.95	5.87	7.03	7.45	1.33	1.37	1.41	1.47	1.53	1.70	1.79
	32	2.65	3.33	4.01	4.75	5.61	6.54	6.96	1.45	1.50	1.58	1.64	1.71	1.84	1.88
	38	2.38	3.11	3.81	4.55	5.37	6.19	6.68	1.62	1.74	1.83	1.87	1.91	2.03	2.08
	43	1.93	2.74	3.48	4.23	5.06	5.99	6.33	1.78	1.83	1.95	2.05	2.11	2.20	2.25
	48	1.68	2.30	3.18	3.87	4.69	5.51	5.80	2.21	2.31	2.44	2.51	2.54	2.55	2.64
ZX025B0 ¹	27	3.52	4.17	4.96	5.91	7.07	8.44	9.06	1.43	1.49	1.55	1.66	1.75	1.83	1.95
	32	3.35	4.02	4.79	5.68	6.73	7.96	8.50	1.59	1.64	1.69	1.84	1.90	2.00	2.06
	38	2.92	3.65	4.43	5.29	6.25	7.33	7.81	1.89	1.92	1.96	2.05	2.08	2.17	2.22
	43	2.39	3.20	4.02	4.88	5.79	6.79	7.22	2.10	2.15	2.22	2.29	2.33	2.37	2.45
	48	1.70	2.62	3.51	4.39	5.28	6.22	6.61	2.59	2.65	2.70	2.75	2.80	2.82	2.90
ZX030B0	27	4.30	5.20	6.28	7.57	9.09	10.22	10.80	1.95	2.04	2.17	2.20	2.23	2.43	2.49
	32	4.12	4.90	5.95	7.28	8.69	9.79	10.31	2.10	2.20	2.32	2.34	2.46	2.70	2.77
	38	3.68	4.62	5.65	6.85	8.29	9.06	9.63	2.37	2.48	2.59	2.60	2.76	3.06	3.12
	43	3.27	4.22	5.27	6.50	7.97	8.63	9.08	2.64	2.75	2.84	2.94	3.04	3.32	3.36
	48	2.40	3.55	4.65	5.67	6.86	7.97	8.50	2.98	3.18	3.28	3.35	3.50	3.64	3.69
ZX040B0	27	5.98	7.20	8.57	10.03	11.54	13.82	14.64	2.64	2.71	2.83	2.98	3.08	3.34	3.36
	32	5.46	6.73	8.13	9.62	11.16	13.01	13.85	2.81	2.90	3.06	3.19	3.33	3.68	3.68
	38	4.72	6.01	7.42	8.93	10.48	12.09	13.04	3.08	3.27	3.39	3.49	3.65	4.09	4.07
	43	4.09	5.37	6.78	8.27	9.80	11.61	12.25	3.29	3.52	3.68	3.80	3.95	4.38	4.39
	48	3.55	4.50	6.20	7.57	9.08	10.68	11.23	4.16	4.46	4.49	4.72	4.80	5.07	5.18
ZX050B0 ²	27	7.13	8.76	10.44	12.22	14.12	17.28	18.22	2.88	3.03	3.18	3.29	3.47	4.16	4.28
	32	6.77	8.31	9.96	11.72	13.68	16.62	17.47	3.37	3.35	3.57	3.67	3.97	4.50	4.58
	38	6.24	7.69	9.28	11.06	13.06	15.31	16.34	3.77	3.87	4.07	4.27	4.47	4.98	5.10
	43	5.44	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.27	4.47	4.66	4.96	5.46	5.56
	48	3.96	5.80	7.62	9.49	11.47	13.49	14.40	5.14	5.21	5.44	5.61	5.80	6.01	6.04
ZX060B0 ²	27	8.50	10.41	12.49	14.72	17.66	19.64	20.60	3.51	3.70	3.88	4.16	4.43	4.98	5.32
	32	7.71	9.93	11.71	13.94	16.30	18.87	20.10	3.88	4.07	4.25	4.43	4.71	5.29	5.47
	38	6.81	8.42	10.57	12.85	15.26	17.77	18.92	4.34	4.53	4.71	4.90	5.08	5.86	5.98
	43	5.91	7.23	9.40	11.78	14.26	16.33	17.86	4.90	5.17	5.45	5.64	5.73	6.57	6.66
	48	4.97	7.00	9.25	11.15	13.08	15.09	16.06	6.02	6.22	6.46	6.69	6.96	7.22	7.45
ZX075B0 ²	27	10.03	12.20	14.41	17.23	20.87			4.34	4.54	4.76	4.98	5.22		
	32	9.45	11.24	13.90	16.63	20.21			4.77	4.95	5.19	5.51	5.91		
	38	8.83	10.85	13.25	15.50	19.42			5.36	5.53	5.83	6.25	6.80		
	43	8.18	10.00	12.29	14.30	18.49			5.95	6.10	6.43	6.93	7.62		
ZX076B0 ²	27	10.23	12.44	14.70	17.60	21.29	25.49	27.01	4.25	4.45	4.66	4.88	5.12	5.47	5.64
	32	9.64	11.46	14.18	16.96	20.61	24.03	25.58	4.67	4.85	5.09	5.40	5.79	5.86	5.97
	38	9.01	11.07	13.52	15.80	19.81	22.85	24.65	5.26	5.42	5.72	6.12	6.67	6.64	6.81
	43	8.34	10.20	12.54	14.60	18.86	22.34	23.57	5.83	5.98	6.30	6.79	7.47	7.34	7.48
	48	7.24	8.55	11.46	14.09	17.47	20.55	21.61	6.79	7.04	7.40	7.89	8.43	8.74	8.78

Notes: ¹ Available on PFJ models only

² Available on TFD models only

The rating condition is based on a return gas temperature of 18.3°C.

Power includes condenser fan.

Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)					Power evaporating temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX020B0	27	3.62	4.42	5.36	6.43	7.59	1.69	1.71	1.69	1.69	1.71
	32	3.41	4.22	5.17	6.20	7.29	1.89	1.91	1.90	1.89	1.90
	38	2.88	3.77	4.75	5.78	6.84	2.13	2.17	2.17	2.17	2.18
	43	2.20	3.19	4.24	5.31	6.38	2.35	2.41	2.42	2.43	2.45
	48	1.30	2.43	3.58	4.73	5.84	2.59	2.67	2.71	2.73	2.75
	50	0.88	2.07	3.27	4.46	5.60	2.69	2.78	2.83	2.85	2.89
ZX030B0	27	5.12	6.20	7.29	8.90	10.54	2.42	2.53	2.69	2.73	2.77
	32	4.91	5.84	6.98	8.48	10.00	2.60	2.73	2.88	2.90	3.05
	38	4.39	5.51	6.53	7.96	9.38	2.94	3.08	3.21	3.22	3.42
	43	3.90	5.03	5.94	7.35	8.74	3.27	3.41	3.52	3.65	3.77
	48	2.86	4.23	5.01	6.45	7.86	3.70	3.94	4.07	4.15	4.34
	50	2.45	3.12	4.51	5.98	7.40	3.86	4.16	4.29	4.36	4.57
ZX040B0	27	7.36	8.83	10.52	12.37	14.31	3.25	3.35	3.52	3.75	4.02
	32	7.06	8.54	10.21	12.02	13.92	3.55	3.63	3.79	4.01	4.28
	38	6.37	7.87	9.55	11.34	13.20	4.05	4.11	4.26	4.48	4.75
	43	5.62	7.16	8.86	10.66	12.50	4.55	4.60	4.73	4.95	5.22
	48	4.82	6.41	8.14	9.96	11.81	5.09	5.12	5.25	5.46	5.74
	50	4.50	6.12	7.87	9.70	11.55	5.30	5.33	5.46	5.67	5.95
ZX050B0	27	8.55	10.51	12.53	14.66	16.95	3.54	3.72	3.91	4.05	4.27
	32	8.12	9.97	11.95	14.06	16.42	4.15	4.13	4.39	4.52	4.88
	38	7.49	9.23	11.14	13.28	15.68	4.64	4.76	5.00	5.25	5.49
	43	6.53	8.16	10.03	12.18	14.65	5.25	5.25	5.49	5.74	6.10
	48	4.75	6.96	9.14	11.39	13.76	6.33	6.40	6.69	6.90	7.13
	50	4.04	6.48	8.79	11.07	13.41	6.76	6.87	7.16	7.37	7.55
ZX060B0	27	10.20	12.49	14.99	17.66	21.19	4.39	4.62	4.85	5.20	5.54
	32	9.25	11.92	14.05	16.73	19.56	4.85	5.08	5.31	5.54	5.89
	38	8.17	10.10	12.68	15.42	18.31	5.43	5.66	5.89	6.12	6.35
	43	7.09	8.68	11.28	14.14	17.11	6.12	6.47	6.81	7.04	7.16
	48	5.96	8.40	11.10	13.38	15.70	7.53	7.77	8.07	8.37	8.70
	50	5.51	8.29	11.03	13.08	15.13	8.09	8.16	8.44	8.75	9.00
ZX075B0	27	11.25	14.06	16.61	19.89	24.05	5.10	5.34	5.59	5.86	6.14
	32	10.60	12.95	16.02	19.16	23.29	5.60	5.82	6.11	6.48	6.95
	38	9.91	12.51	15.28	17.85	22.38	6.31	6.51	6.86	7.35	8.00
	43	9.18	11.53	14.17	16.50	21.31	7.00	7.17	7.56	8.15	8.96
	48	7.96	9.66	12.95	15.92	19.74	8.15	8.45	8.88	9.47	10.12
	50	7.48	8.92	12.46	15.69	19.11	8.61	8.96	9.41	10.00	10.58

Notes: The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020BE	27	3.30	3.90	4.44	5.08	5.79	6.60	1.64	1.67	1.70	1.76	1.84	1.96
	32	2.85	3.39	3.92	4.48	5.08	5.76	1.79	1.81	1.84	1.90	2.00	2.12
	38	2.42	2.90	3.36	3.85	4.36	4.94	1.95	1.99	2.02	2.07	2.16	2.26
	43	1.94	2.43	2.89	3.34	3.81	4.30	2.14	2.18	2.22	2.27	2.34	2.41
ZX025BE ¹	27	3.22	3.95	4.67	5.45	6.37	7.50	1.71	1.76	1.79	1.84	1.90	1.96
	32	2.96	3.68	4.36	5.09	5.95	7.00	1.93	1.96	2.00	2.04	2.08	2.13
	38	2.61	3.31	3.96	4.64	5.41	6.37	2.19	2.23	2.26	2.29	2.32	2.35
	43	1.96	2.64	3.26	3.89	4.61	5.48	2.59	2.65	2.69	2.71	2.73	2.76
ZX030BE	27	4.04	4.87	5.81	6.85	7.99	9.23	2.14	2.19	2.24	2.32	2.42	2.55
	32	3.75	4.52	5.39	6.35	7.40	8.55	2.40	2.44	2.50	2.57	2.67	2.81
	38	3.39	4.08	4.85	5.72	6.67	7.69	2.72	2.75	2.80	2.88	3.00	3.15
	43	3.06	3.69	4.39	5.17	6.03	6.97	3.06	3.09	3.14	3.21	3.33	3.50
ZX040BE	27	5.52	6.57	7.70	8.95	10.37	12.02	2.72	2.86	3.02	3.17	3.31	3.36
	32	5.10	6.10	7.13	8.24	9.47	10.87	3.03	3.15	3.31	3.46	3.54	3.68
	38	4.61	5.60	6.57	7.57	8.64	9.85	3.45	3.58	3.71	3.85	3.97	4.03
	43	3.98	5.00	5.95	6.89	7.83	8.85	3.87	4.00	4.12	4.23	4.33	4.38
ZX050BE ²	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
ZX060BE ²	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.53	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
ZX075BE ²	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZX076BE ²	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07

Notes: ¹ Available on PFJ models only
² Available on TFD models only
 The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020BE	27	3.50	4.26	4.98	5.77	6.71	7.89	1.84	1.87	1.90	1.95	2.00	2.05
	32	3.15	3.94	4.66	5.40	6.25	7.30	2.09	2.10	2.12	2.16	2.20	2.24
	38	2.69	3.52	4.24	4.93	5.69	6.60	2.42	2.42	2.44	2.47	2.50	2.54
	43	2.22	3.09	3.82	4.48	5.17	5.97	2.71	2.71	2.73	2.76	2.81	2.85
ZX030BE	27	5.02	5.98	7.05	8.17	9.29	10.36	2.69	2.80	2.92	3.05	3.17	3.29
	32	4.62	5.56	6.63	7.75	8.88	9.97	2.98	3.06	3.16	3.26	3.36	3.45
	38	4.14	5.02	6.02	7.10	8.18	9.23	3.38	3.46	3.55	3.65	3.75	3.85
	43	3.78	4.56	5.47	6.46	7.47	8.44	3.74	3.84	3.95	4.08	4.21	4.33
ZX040BE	27	6.71	8.02	9.60	11.30	13.00	14.59	3.72	3.79	3.89	3.99	4.10	4.18
	32	6.46	7.70	9.20	10.81	12.42	13.90	3.84	3.92	4.02	4.14	4.26	4.35
	38	5.90	7.05	8.45	9.95	11.43	12.76	4.32	4.40	4.50	4.62	4.74	4.84
	43	5.36	6.43	7.73	9.12	10.49	11.69	4.89	4.95	5.05	5.16	5.27	5.37
ZX050BE	27	8.10	9.70	11.55	13.54	15.53	17.38	4.42	4.63	4.86	5.11	5.35	5.57
	32	8.05	9.56	11.33	13.21	15.09	16.83	4.59	4.78	4.99	5.22	5.45	5.66
	38	7.46	8.86	10.50	12.25	13.99	15.58	5.10	5.27	5.48	5.70	5.93	6.13
	43	6.81	8.10	9.63	11.26	12.88	14.33	5.62	5.80	6.01	6.24	6.47	6.69
ZX060BE ¹	27	9.84	11.77	13.96	16.31	18.74	21.15	5.06	5.24	5.49	5.76	6.01	6.20
	32	9.25	11.09	13.16	15.36	17.60	19.79	5.39	5.58	5.82	6.09	6.35	6.55
	38	8.30	10.09	12.06	14.13	16.19	18.16	6.09	6.25	6.48	6.74	6.99	7.19
	43	7.32	9.11	11.04	13.03	14.98	16.82	6.82	6.96	7.17	7.41	7.65	7.83
ZX075BE ¹	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19

Notes: ¹Available on TF5/TF7 models only

The rating condition is based on a return gas temperature of 18.3°C.

Power includes condenser fan.

Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX020BE	27	3.63	4.32	5.07	5.79	6.45	7.24	7.62	1.55	1.67	1.76	1.87	1.99	2.06	2.14
	32	3.36	3.98	4.69	5.39	6.07	6.90	7.30	1.77	1.85	1.93	2.05	2.22	2.35	2.46
	38	2.79	3.35	4.02	4.74	5.46	6.35	6.78	2.11	2.18	2.27	2.44	2.70	2.92	3.06
	43	2.21	2.74	3.40	4.14	4.91			2.40	2.48	2.61	2.84	3.20		
ZX025BE ¹	27	3.91	4.83	5.80	6.82	7.91	9.05	9.53	1.72	1.85	1.92	1.96	2.00	2.09	2.14
	32	3.63	4.45	5.35	6.35	7.44	8.63	9.13	1.97	2.05	2.10	2.15	2.23	2.38	2.46
	38	3.01	3.74	4.59	5.58	6.69	7.94	8.48	2.35	2.41	2.47	2.56	2.71	2.96	3.09
	43	2.39	3.06	3.88	4.87	6.03			2.67	2.74	2.83	2.98	3.22		
ZX030BE	27	5.01	6.13	7.30	8.53	9.88	11.32	11.91	2.20	2.39	2.47	2.58	2.64	2.78	2.85
	32	4.64	5.65	6.75	7.94	9.31	10.79	11.41	2.44	2.63	2.67	2.77	2.97	3.16	3.27
	38	3.85	4.75	5.79	6.97	8.37	9.93	10.60	2.86	3.00	3.11	3.23	3.57	3.90	4.07
	43	3.06	3.88	4.89	6.09	7.53			3.11	3.28	3.43	3.49	4.03		
ZX040BE	27	6.81	8.21	9.64	11.09	12.65	14.37	15.13	2.87	3.18	3.26	3.38	3.41	3.57	3.66
	32	6.31	7.57	8.91	10.33	11.91	13.70	14.49	3.18	3.49	3.53	3.64	3.84	4.06	4.20
	38	5.24	6.36	7.64	9.07	10.71	12.61	13.46	3.72	3.98	4.10	4.24	4.61	5.01	5.23
	43	4.16	5.20	6.46	7.92	9.64			4.04	4.36	4.53	4.59	5.21		
ZX050BE ²	27	8.11	10.02	11.73	13.53	15.71	18.56	19.95	3.62	3.70	3.92	4.20	4.46	4.62	4.64
	32	7.42	9.44	11.19	12.96	15.04	17.74	19.05	4.07	4.16	4.39	4.69	4.96	5.14	5.16
	38	6.32	8.44	10.22	11.95	13.91	16.41	17.61	4.61	4.71	4.95	5.26	5.54	5.73	5.76
	43	5.32	7.53	9.33	11.01	12.87			5.12	5.22	5.46	5.77	6.06		
ZX060BE ²	27	9.24	11.22	13.02	15.16	18.23	21.53	23.15	3.93	3.87	4.07	4.36	4.79	4.96	4.98
	32	8.46	10.57	12.42	14.51	17.45	20.57	22.09	4.50	4.48	4.62	5.00	5.38	5.57	5.60
	38	7.20	9.45	11.35	13.38	16.14	19.03	20.43	5.05	5.02	5.19	5.50	6.07	6.27	6.30
	43	6.07	8.44	10.36	12.33	14.93			5.56	5.51	5.66	5.98	6.44		
ZX075BE ²	27	10.07	12.23	14.19	16.52	19.68			4.32	4.22	4.39	4.65	5.08		
	32	9.23	11.52	13.53	15.82	18.85			4.92	4.89	5.04	5.47	5.81		
	38	7.85	10.31	12.37	14.59	17.43			5.68	5.64	5.80	6.16	6.74		
	43	6.62	9.20	11.29	13.45	16.12			6.38	6.29	6.46	6.81	7.28		
ZX076BE ²	27	10.28	12.48	14.48	16.85	20.08	23.72	25.50	4.44	4.31	4.43	4.64	5.08	5.26	5.28
	32	9.41	11.75	13.80	16.14	19.23	22.66	24.34	5.03	5.01	5.14	5.60	5.93	6.14	6.16
	38	8.01	10.51	12.62	14.88	17.78	20.96	22.51	5.97	5.94	6.07	6.44	7.08	7.34	7.38
	43	6.75	9.38	11.52	13.71	16.44			6.84	6.72	6.90	7.26	7.76		

Notes: ¹ Available on PFJ models only
² Available on TFD models only
 The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)					Power evaporating temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX020BE	27	4.51	5.36	6.27	7.14	7.92	2.01	2.11	2.20	2.28	2.41
	32	4.17	4.93	5.78	6.63	7.44	2.29	2.33	2.41	2.50	2.68
	38	3.45	4.13	4.95	5.81	6.68	2.73	2.74	2.83	2.97	3.25
	43	2.73	3.37	4.18	5.07	6.00	3.10	3.11	3.24	3.45	3.85
ZX030BE	27	6.23	7.60	9.03	10.51	12.14	2.86	3.02	3.08	3.15	3.19
	32	5.76	6.99	8.32	9.77	11.41	3.17	3.31	3.33	3.38	3.58
	38	4.77	5.86	7.13	8.56	10.24	3.70	3.76	3.87	3.93	4.30
	43	3.78	4.78	6.01	7.46	9.20	4.01	4.11	4.26	4.24	4.84
ZX040BE	27	8.47	10.18	11.91	13.66	15.54	3.72	4.01	4.07	4.13	4.12
	32	7.83	9.36	10.99	12.70	14.60	4.12	4.39	4.39	4.43	4.63
	38	6.49	7.85	9.41	11.13	13.11	4.82	5.00	5.10	5.16	5.56
	43	5.14	6.41	7.94	9.70	11.78	5.22	5.46	5.62	5.57	6.26
ZX050BE	27	10.08	12.42	14.50	16.67	19.30	4.71	4.67	4.89	5.13	5.40
	32	9.21	11.68	13.80	15.94	18.45	5.27	5.23	5.47	5.71	5.99
	38	7.82	10.42	12.58	14.67	17.03	5.97	5.91	6.16	6.39	6.68
	43	6.58	9.28	11.47	13.49	15.71	6.61	6.54	6.77	7.00	7.28
ZX060BE ¹	27	11.49	13.91	16.09	18.68	22.39	5.11	4.88	5.08	5.32	5.80
	32	10.50	13.08	15.31	17.85	21.40	5.83	5.63	5.76	6.09	6.49
	38	8.92	11.67	13.97	16.43	19.75	6.54	6.31	6.45	6.69	7.31
	43	7.50	10.40	12.73	15.11	18.23	7.17	6.91	7.03	7.26	7.75
ZX075BE ¹	27	12.53	15.16	17.54	20.36	24.18	5.61	5.32	5.48	5.68	6.14
	32	11.45	14.25	16.69	19.45	23.11	6.38	6.16	6.28	6.67	7.01
	38	9.72	12.72	15.23	17.91	21.33	7.35	7.09	7.21	7.49	8.12
	43	8.18	11.33	13.87	16.47	19.69	8.23	7.89	8.02	8.27	8.75

Notes: ¹Available on TF5/TF7 models only
 The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZXB015BE	27	2.42	2.92	3.48	4.11	4.83	5.65	6.01	1.10	1.08	1.09	1.11	1.14	1.16	1.16
	32	2.37	2.87	3.42	4.03	4.72	5.52	5.86	1.20	1.18	1.18	1.21	1.25	1.28	1.29
	38	2.26	2.76	3.30	3.89	4.56	5.31	5.64	1.34	1.32	1.33	1.36	1.41	1.46	1.47
	43	2.14	2.64	3.18	3.76	4.40	5.13	5.44	1.49	1.47	1.48	1.52	1.58	1.64	1.66
	48	2.01	2.52	3.05	3.61	4.24	4.94	5.24	1.67	1.64	1.66	1.71	1.77	1.84	1.87
ZXB020BE	27	2.74	3.41	4.14	4.94	5.78	6.67	7.03	1.08	1.07	1.10	1.14	1.19	1.23	1.25
	32	2.63	3.29	4.01	4.80	5.63	6.51	6.87	1.21	1.20	1.23	1.27	1.33	1.38	1.40
	38	2.47	3.12	3.84	4.61	5.43	6.29	6.64	1.38	1.38	1.41	1.46	1.52	1.58	1.60
	43	2.36	2.99	3.70	4.45	5.26	6.10	6.44	1.53	1.53	1.57	1.62	1.69	1.75	1.78
	48	2.27	2.90	3.58	4.32	5.10	5.92	6.25	1.69	1.69	1.73	1.78	1.85	1.93	1.95
ZXB025BE	27	2.98	3.70	4.46	5.28	6.19	7.20	7.63	1.25	1.28	1.34	1.42	1.52	1.62	1.66
	32	2.89	3.59	4.33	5.14	6.02	7.00	7.43	1.37	1.41	1.48	1.56	1.66	1.75	1.79
	38	2.79	3.47	4.18	4.95	5.80	6.75	7.16	1.53	1.59	1.67	1.76	1.86	1.96	1.99
	43	2.72	3.37	4.05	4.79	5.61	6.52	6.91	1.67	1.75	1.85	1.96	2.07	2.17	2.20
	48	2.65	3.27	3.92	4.62	5.40	6.27	6.65	1.83	1.94	2.06	2.18	2.30	2.41	2.44
ZXB030BE	27	3.74	4.53	5.45	6.49	7.66	8.95	9.49	1.50	1.54	1.62	1.73	1.83	1.93	1.96
	32	3.59	4.39	5.29	6.30	7.43	8.66	9.18	1.65	1.69	1.77	1.89	2.02	2.16	2.21
	38	3.43	4.22	5.10	6.08	7.15	8.31	8.80	1.85	1.87	1.96	2.09	2.25	2.43	2.50
	43	3.29	4.07	4.94	5.88	6.90	8.01	8.47	2.05	2.05	2.14	2.28	2.46	2.67	2.75
	48	3.14	3.91	4.75	5.66	6.64	7.67	8.11	2.30	2.29	2.36	2.51	2.70	2.94	3.03
ZXB035BE	27	5.09	6.04	7.16	8.40	9.73	11.13	11.70	1.88	2.06	2.21	2.35	2.52	2.75	2.87
	32	4.93	5.88	6.97	8.17	9.46	10.81	11.35	2.02	2.23	2.40	2.56	2.75	3.00	3.13
	38	4.76	5.67	6.72	7.88	9.11	10.37	10.88	2.22	2.45	2.65	2.84	3.05	3.32	3.46
	43	4.61	5.50	6.51	7.61	8.78	9.97	10.45	2.42	2.69	2.90	3.11	3.34	3.64	3.78
	48	4.47	5.32	6.28	7.32	8.41	9.53	9.97	2.71	2.99	3.23	3.46	3.71	4.03	4.18
ZXB040BE	27	5.48	6.65	7.93	9.34	10.88	12.55	13.26	2.19	2.22	2.33	2.49	2.70	2.95	3.05
	32	5.30	6.43	7.68	9.05	10.54	12.18	12.87	2.32	2.38	2.51	2.68	2.90	3.15	3.26
	38	5.11	6.18	7.38	8.69	10.13	11.71	12.38	2.53	2.62	2.77	2.95	3.17	3.42	3.52
	43	4.94	5.97	7.11	8.37	9.77	11.30	11.95	2.80	2.91	3.06	3.25	3.47	3.70	3.80
	48	4.76	5.73	6.82	8.03	9.36	10.84	11.47	3.18	3.31	3.47	3.66	3.87	4.09	4.18
ZXB050BE	27	6.23	7.53	9.10	10.95	13.06	15.47	16.51	2.45	2.52	2.66	2.84	3.05	3.28	3.37
	32	6.21	7.52	9.07	10.86	12.90	15.19	16.18	2.72	2.83	2.99	3.19	3.42	3.65	3.74
	38	6.17	7.45	8.93	10.63	12.54	14.67	15.59	3.07	3.21	3.41	3.63	3.87	4.10	4.19
	43	6.01	7.24	8.65	10.23	12.01	13.98	14.82	3.34	3.52	3.73	3.98	4.22	4.46	4.55
	48	5.65	6.80	8.10	9.56	11.18	12.96	13.72	3.57	3.78	4.02	4.28	4.54	4.78	4.86
ZXB060BE	27	7.34	8.70	10.14	11.76	13.65	15.91	16.94	2.92	3.13	3.38	3.63	3.89	4.14	4.24
	32	7.12	8.46	9.86	11.42	13.23	15.41	16.40	3.12	3.35	3.61	3.89	4.19	4.49	4.61
	38	6.87	8.16	9.49	10.97	12.69	14.75	15.69	3.43	3.66	3.93	4.23	4.56	4.90	5.05
	43	6.69	7.94	9.21	10.61	12.24	14.19	15.09	3.76	3.98	4.25	4.56	4.90	5.28	5.43
	48	6.59	7.78	8.98	10.30	11.83	13.67	14.51	4.20	4.39	4.65	4.96	5.32	5.71	5.87

Notes: The rating condition is based on the return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030B0	27	5.32	6.09	7.21	8.70	10.63	11.53	1.76	1.93	2.05	2.09	1.99	1.90
	32	4.90	5.84	6.94	8.24	9.80	10.50	2.02	2.11	2.21	2.28	2.27	2.24
	38	4.34	5.64	6.88	8.12	9.40	9.93	2.31	2.27	2.31	2.39	2.48	2.50
	43	3.18	4.91	6.41	7.72	8.90	9.34	2.74	2.57	2.55	2.62	2.75	2.81
	48		3.08						3.25				
ZXD040B0	27	7.73	9.28	10.88	12.42	14.67	15.18	2.66	2.77	2.92	3.02	3.30	3.38
	32	7.29	8.91	10.61	12.33	14.29	14.98	2.84	3.00	3.12	3.26	3.60	3.70
	38	6.39	7.95	9.68	11.44	13.22	14.14	3.20	3.32	3.42	3.57	4.01	4.10
	43	5.71	7.27	8.97	10.70	12.69	13.29	3.44	3.60	3.72	3.86	4.29	4.40
	48		6.55	8.06	9.76	11.56	12.17		4.40	4.62	4.70	4.96	5.07
ZXD050B0	27	8.76	10.44	12.22	14.12	17.28	18.22	3.03	3.18	3.29	3.47	3.95	4.10
	32	8.31	9.96	11.72	13.68	16.62	17.47	3.35	3.57	3.67	3.97	4.50	4.58
	38	7.69	9.28	11.06	13.06	15.31	16.34	3.87	4.07	4.27	4.47	4.98	5.10
	43	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.47	4.66	4.96	5.46	5.56
	48		7.62	9.49	11.47	13.49	14.40		5.44	5.61	5.80	6.01	6.04
ZXD060B0	27	10.41	12.49	14.72	17.66	19.64	20.60	3.70	3.88	4.16	4.50	4.70	4.81
	32	9.93	11.71	13.94	16.30	18.87	20.10	4.07	4.25	4.43	4.75	5.29	5.47
	38	8.90	10.57	12.85	15.26	17.77	18.92	4.53	4.71	4.90	5.23	5.86	5.98
	43	7.60	9.40	11.78	14.26	16.33	17.86	5.17	5.45	5.64	6.10	6.57	6.66
	48		9.25	11.15	13.08	15.09	16.06		6.46	6.69	6.96	7.22	7.30
ZXD075B0	27	12.37	14.91	17.73	20.87			4.54	4.76	4.98	5.22		
	32	11.24	13.90	16.96	20.21			4.95	5.19	5.51	5.91		
	38	10.85	13.25	16.08	19.42			5.53	5.83	6.25	6.80		
	43		12.29	15.09	18.49				6.43	6.93	7.62		
ZXD076B0	27	12.62	15.21	18.08	21.29	24.47	25.93	4.45	4.66	4.88	5.12	5.47	5.64
	32	11.46	14.18	16.96	20.61	23.07	24.56	4.85	5.09	5.40	5.79	5.86	5.97
	38	11.07	13.52	15.80	19.81	21.94	23.66	5.42	5.72	6.12	6.67	6.64	6.81
	43	10.20	12.54	14.60	18.86	21.45	22.63	5.98	6.30	6.79	7.47	7.34	7.48
	48		11.46	14.09	17.47	19.73	20.75		7.40	7.89	8.43	8.74	8.78

Notes: The rating condition is based on suction superheat of 10K.
 ZXD030B0 rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38oC and 43oC are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030B0 ¹	27	6.18	7.27	8.44	9.77	11.34	12.05	2.21	2.31	2.46	2.72	3.12	3.32
	32	5.93	7.07	8.23	9.49	10.94	11.58	2.48	2.60	2.76	2.99	3.32	3.49
	38	5.45	6.67	7.86	9.08	10.42	11.00	2.72	2.90	3.07	3.27	3.54	3.68
	43	4.80	6.14	7.38	8.60	9.87		2.92	3.14	3.33	3.52	3.75	
	48		5.35						3.43				
ZXD040B0	27	8.03	9.77	11.63	13.35	15.08		3.09	3.20	3.37	3.60	3.90	
	32	7.62	9.29	11.09	12.74	14.38		3.39	3.50	3.68	3.92	4.24	
	38	6.97	8.27	9.89	11.97	13.66		3.80	3.92	4.11	4.37	4.71	
	43	6.47	7.78	9.33	11.31	13.03		4.20	4.32	4.52	4.79	5.16	
	48		7.43	8.94	10.51	12.23			4.77	4.98	5.27	5.66	
ZXD050B0	27	10.30	12.52	14.91	17.12	19.33		3.97	4.11	4.32	4.61	5.00	
	32	9.77	11.91	14.21	16.33	18.44		4.35	4.49	4.72	5.02	5.44	
	38	8.94	10.60	12.68	15.35	17.51		4.88	5.03	5.27	5.60	6.04	
	43	8.29	9.98	11.97	14.50	16.71		5.38	5.54	5.79	6.14	6.61	
	48		9.53	11.46	13.48	15.68			6.12	6.38	6.76	7.25	
ZXD060B0	27	12.15	14.77	17.60	20.20	22.81		4.72	4.89	5.14	5.49	5.95	
	32	11.53	14.06	16.77	19.27	21.76		5.17	5.35	5.61	5.98	6.47	
	38	10.54	12.51	14.96	18.11	20.66		5.80	5.99	6.27	6.66	7.18	
	43	9.78	11.78	14.12	17.11	19.72		6.41	6.60	6.89	7.31	7.87	
	48	NA	11.24	13.52	15.90	18.50		NA	7.28	7.60	8.04	8.63	
ZXD075B0	27	13.29	16.15	19.24	22.08	24.94		5.23	5.42	5.70	6.09	6.60	
	32	12.61	15.37	18.34	21.06	23.79		5.74	5.93	6.22	6.63	7.18	
	38	11.53	13.67	16.36	19.80	22.59		6.44	6.64	6.95	7.39	7.97	
	43	10.70	12.87	15.44	18.70	21.55		7.10	7.32	7.64	8.11	8.73	
	48	NA	12.29	14.78	17.38	20.23		NA	8.08	8.43	8.92	9.57	

Notes: ¹ Available on TF7 models only.
 The rating condition is based on suction superheat of 10K.
 ZXD030B0 rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-15	-5	0	5
ZXD030BE	27	3.95	4.65	5.56	6.65	7.90	9.28	1.92	2.14	2.24	2.26	2.26	2.29
	32	3.72	4.37	5.20	6.18	7.28	8.47	2.01	2.22	2.33	2.38	2.43	2.53
	38	3.32	3.94	4.69	5.55	6.48	7.45	2.27	2.46	2.56	2.63	2.73	2.90
	43	2.98	3.59	4.29	5.06	5.86	6.67	2.53	2.69	2.78	2.85	2.97	3.19
	48		3.34	4.00	4.70	5.39			2.86	2.92	2.99	3.13	
ZXD040BE	27	5.92	7.11	8.35	9.64	11.01	12.46	2.70	2.85	3.02	3.21	3.43	3.68
	32	5.53	6.69	7.87	9.11	10.40	11.75	2.99	3.12	3.27	3.44	3.64	3.87
	38	4.90	6.00	7.12	8.27	9.45	10.68	3.49	3.59	3.72	3.87	4.04	4.24
	43	4.23	5.28	6.33	7.40	8.48	9.59	4.02	4.10	4.21	4.34	4.50	4.68
	48	3.56	4.56	5.54	6.53	7.51		4.55	4.61	4.70	4.81	4.96	
ZXD050BE	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
	48	4.20	5.49	6.91	8.42	9.98		5.63	5.67	5.75	5.85	6.01	
ZXD060BE	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.58	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
	48	5.06	6.71	8.31	9.93	11.66		6.26	6.32	6.46	6.64	6.83	
ZXD075BE	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZXD076BE	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07
	48	5.32	7.26	8.77	10.50	12.34		6.79	6.88	7.02	7.21	7.43	
ZXD090BE	27	10.75	12.44	14.22	16.11	18.08	20.16	4.87	5.19	5.53	5.87	6.22	6.56
	32	10.40	12.08	13.85	15.73	17.70	19.75	5.31	5.67	6.04	6.43	6.82	7.23
	38	9.82	11.40	13.09	14.86	16.71	18.63	5.93	6.34	6.77	7.23	7.71	8.21
	43	8.98	10.42	11.97	13.60	15.32	17.10	6.58	7.05	7.54	8.07	8.62	9.19
	48	7.69	8.98	10.38	11.86	13.40		7.39	7.91	8.47	9.06	9.69	
ZXD100HE	27	13.02	15.47	18.24	21.29	24.56	28.01	5.63	5.96	6.35	6.81	7.36	8.01
	32	12.24	14.56	17.14	19.94	22.90	25.98	6.26	6.61	6.98	7.40	7.88	8.42
	38	11.44	13.61	15.96	18.46	21.04	23.66	7.13	7.51	7.88	8.25	8.63	9.05
	43	10.98	13.03	15.19	17.43	19.70	21.95	7.98	8.38	8.74	9.07	9.39	9.70
	48	10.82	12.73	14.71	16.70	18.65		8.94	9.36	9.72	10.02	10.27	
ZXD120BE	27	15.94	19.72	23.35	26.67	30.50		8.22	8.49	8.96	9.61	10.40	
	32	14.82	18.47	22.12	25.63	29.07		8.97	9.25	9.69	10.27	10.97	
	38	13.37	16.84	20.50	24.22	27.85		9.96	10.25	10.67	11.20	11.81	
	43	11.74	15.04	18.70	22.57	26.52		10.86	11.19	11.61	12.11	12.66	
	48	9.41	12.54	16.18	20.19	24.45		11.85	12.22	12.66	13.15	13.65	
ZXD160BE	27	21.54	24.95	28.49	32.10	35.71		10.45	10.86	11.27	11.69	12.13	
	32	20.35	23.84	27.53	31.33	35.18		11.45	11.89	12.33	12.78	13.26	
	38	19.48	22.99	26.75	30.68	34.73		12.49	12.99	13.48	13.99	14.53	
	43	18.51	22.15	25.88	29.84	33.97		13.41	13.96	14.52	15.09	15.69	
	48	17.21	20.71	24.34	28.26	32.39		14.52	15.15	15.78	16.43	17.11	
ZXD200BE	27	25.15	30.38	35.68	41.14			13.40	13.71	14.08	15.00		
	32	23.59	29.01	34.48	40.12			15.78	15.89	15.96	16.37		
	38	22.20	27.27	32.79	38.45			18.26	18.56	18.77	18.90		
	43	21.26	26.12	31.53	37.07			20.01	20.59	20.78	20.93		
	48	20.76	25.6	30.76	36.06			21.26	21.86	22.02	22.24		

Notes: The rating condition is based on return gas temperature of 18.3°C.
 ■ The rating condition is based on suction superheat of 10 K.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD030BE ¹	27	4.70	5.68	6.71	7.80	8.94	10.14	2.29	2.46	2.63	2.79	2.95	3.10
	32	4.43	5.36	6.33	7.34	8.37	9.45	2.48	2.66	2.84	3.01	3.18	3.35
	38	4.03	4.89	5.77	6.67	7.58	8.50	2.73	2.92	3.10	3.29	3.48	3.67
	43	3.67	4.47	5.27	6.07	6.86	7.65	2.96	3.15	3.34	3.54	3.75	3.95
	48		4.07	4.78	5.48	6.15			3.40	3.59	3.80	4.02	
ZXD040BE	27	7.10	8.53	9.35	10.80	12.99	14.70	3.24	3.42	3.62	3.85	4.05	4.34
	32	6.64	8.03	8.70	10.20	12.27	13.87	3.59	3.74	4.00	4.13	4.30	4.57
	38	5.88	7.20	7.97	9.26	11.15	12.60	4.19	4.31	4.46	4.64	4.77	5.00
	43	5.21	6.34	7.09	8.29	10.01	11.32	4.82	4.92	5.05	5.21	5.31	5.52
	48	4.27	5.60	6.20	7.31	8.86		5.46	5.53	5.64	5.77	5.85	
ZXD050BE	27	8.99	10.86	11.74	13.54	15.32	17.06	4.38	4.48	4.63	4.83	5.10	5.44
	32	7.87	9.75	10.77	12.57	14.41	16.21	4.93	5.04	5.11	5.40	5.66	6.00
	38	6.67	8.48	9.54	11.35	13.18	14.99	5.51	5.61	5.75	5.95	6.20	6.51
	43	5.86	7.54	8.57	10.31	12.08	13.84	6.14	6.21	6.32	6.48	6.71	6.97
	48	5.04	6.59	7.60	9.26	10.98		6.76	6.81	6.89	7.02	7.22	
ZXD060BE	27	10.22	12.06	13.41	15.56	17.89	21.07	4.42	4.61	5.08	5.41	5.78	6.16
	32	9.34	11.23	12.54	14.72	16.78	19.61	5.28	5.45	5.93	6.26	6.61	6.96
	38	8.36	10.23	11.50	13.51	15.37	17.89	5.91	6.06	6.58	6.83	7.15	7.47
	43	7.44	9.27	10.61	12.57	14.33	16.68	6.71	6.83	7.32	7.57	7.85	8.34
	48	6.27	8.22	9.72	11.62	13.29		7.51	7.59	8.07	8.30	8.54	
ZXD075BE	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19
	48	6.44	8.78	10.07	12.05			8.15	8.26	9.06	9.30		
ZXD100HE	27	15.03	17.86	20.90	24.15	27.61	31.28	6.59	7.02	7.49	8.00	8.58	9.24
	32	14.61	17.32	20.19	23.24	26.46	29.85	7.16	7.64	8.14	8.68	9.28	9.95
	38	14.04	16.60	19.28	22.09	25.03	28.09	7.91	8.45	9.00	9.58	10.21	10.90
	43	13.50	15.94	18.47	21.08	23.78	26.58	8.58	9.17	9.77	10.39	11.06	11.78
	48	12.89	15.22	17.59	20.02	22.49		9.29	9.95	10.60	11.27	11.97	

Notes: ¹Available on TF7 models only.
 The rating condition is based on return gas temperature of 18.3°C.
 The rating condition is based on suction superheat of 10 K.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030BE	27	5.70	6.64	7.48	8.63	10.52	11.57	2.20	2.33	2.61	2.87	2.93	2.86
	32	5.31	6.35	7.24	8.40	10.25	11.27	2.42	2.53	2.79	3.01	3.02	2.92
	38	4.72	5.84	6.75	7.88	9.64	10.62	2.79	2.90	3.14	3.33	3.30	3.19
	43		5.45	6.35					3.23	3.47			
	48												
ZXD040BE	27	7.68	9.32	11.17	13.20	15.41	16.34	2.85	3.04	3.23	3.40	3.49	3.50
	32	7.30	8.93	10.73	12.69	14.77	15.64	3.13	3.30	3.50	3.70	3.86	3.90
	38	6.66	8.27	10.01	11.85	13.77	14.56	3.53	3.66	3.86	4.09	4.31	4.39
	43	6.06	7.64	9.30	11.03	12.81	13.53	3.95	4.04	4.22	4.46	4.72	4.83
	48		6.98	8.56					4.52	4.67			
ZXD050BE	27	9.52	11.65	13.94	16.37	19.26	20.42	3.61	3.77	3.94	4.08	4.20	4.21
	32	9.05	11.21	13.52	15.73	18.47	19.56	3.97	4.11	4.30	4.45	4.64	4.70
	38	8.11	10.33	12.69	14.81	17.35	18.37	4.40	4.54	4.77	4.95	5.23	5.33
	43	7.45	9.47	11.72	13.90	16.40	17.40	4.98	4.98	5.19	5.45	5.82	5.97
	48		8.73	10.79					5.61	5.74			
ZXD060BE	27	10.37	12.69	15.70	18.80	22.69	24.24	3.80	4.18	4.49	4.58	4.62	4.86
	32	9.85	12.20	15.23	17.91	21.39	22.78	4.33	4.74	5.15	5.11	5.14	5.40
	38	9.07	11.50	14.19	16.64	19.76	21.01	4.81	5.27	5.65	5.64	5.75	6.03
	43	8.41	10.59	12.99	15.41	18.34	19.52	5.40	5.72	5.99	6.06	6.26	6.54
	48		9.93	12.07					6.67	6.85			
ZXD075BE	27	12.99	15.24	17.78	20.67			4.92	5.09	5.19	5.28		
	32	12.35	14.49	16.87	19.56			5.61	5.71	5.83	5.86		
	38	11.35	13.34	15.51	17.92			6.22	6.19	6.30	6.37		
	43		12.30	14.28	16.44				6.73	6.72	6.78		
	48												
ZXD076BE	27	13.25	15.54	18.13	21.09	24.47	25.82	4.82	4.98	5.09	5.18	5.14	5.33
	32	12.59	14.78	17.21	19.96	23.07	24.32	5.50	5.59	5.71	5.74	5.71	5.94
	38	11.57	13.60	15.82	18.28	21.06	22.17	6.10	6.07	6.17	6.24	6.31	6.56
	43	10.67	12.55	14.57	16.77	19.23	20.22	6.80	6.60	6.58	6.65	6.75	6.98
	48		11.54	13.33					7.45	7.26			
ZXD100HE	27	16.87	20.66	25.16	30.46	36.67	39.43	5.87	6.48	7.24	8.13	9.16	9.62
	32	15.93	19.24	23.04	27.39	32.33	34.48	6.46	7.03	7.72	8.51	9.43	9.83
	38	14.86	17.75	20.93	24.42	28.22	29.82	7.33	7.88	8.51	9.23	10.04	10.39
	43	14.32	16.99	19.84	22.84	25.97	27.24	8.31	8.87	9.49	10.18	10.93	11.25
	48	13.62	16.08	18.61				9.68	10.27	10.91			

Notes: The rating condition is based on suction superheat of 10K
 ZXD030BE and ZXD100HE rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38oC and 43oC are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030BE ¹	27	6.92	8.06	9.40	10.99	12.90	13.76	2.64	2.82	2.97	3.13	3.40	3.55
	32	6.66	7.78	9.01	10.41	12.04	12.78	2.85	3.05	3.20	3.39	3.67	3.83
	38	6.20	7.32	8.45	9.64	10.98	11.56	3.13	3.35	3.54	3.75	4.08	4.25
	43		6.84	7.90					3.65	3.86			
	48												
ZXD040BE	27	8.60	10.44	13.18	15.58	18.18	19.27	3.41	3.64	3.82	4.01	4.11	4.12
	32	8.06	10.00	12.66	14.98	17.45	18.48	3.82	3.96	4.14	4.37	4.56	4.61
	38	7.46	9.27	11.81	13.98	16.25	17.18	4.23	4.39	4.56	4.82	5.08	5.17
	43	6.78	8.56	10.98	13.02	15.12	15.97	4.74	4.85	4.98	5.26	5.57	5.69
	48		7.81	10.10					5.42	5.51			
ZXD050BE	27	10.48	12.81	15.33	18.01	21.19	22.46	4.33	4.53	4.72	4.90	5.04	5.06
	32	9.98	12.32	14.87	17.30	20.30	21.50	4.69	4.93	5.16	5.33	5.58	5.64
	38	8.93	11.36	13.96	16.29	19.08	20.20	5.28	5.44	5.74	5.95	6.28	6.40
	43	8.20	10.42	12.89	15.29	18.04	19.14	5.97	5.97	6.23	6.53	6.98	7.16
	48		9.60	11.87					6.73	6.90			
ZXD060BE	27	12.12	14.84	17.90	21.44	25.87	27.64	4.75	5.22	5.62	5.72	5.77	6.06
	32	11.53	14.28	17.36	20.42	24.39	25.98	5.40	5.93	6.45	6.40	6.43	6.76
	38	10.62	13.45	16.18	18.97	22.53	23.95	6.02	6.58	7.06	7.04	7.17	7.53
	43	9.84	12.40	14.81	17.57	20.92	22.26	6.75	7.14	7.49	7.77	8.22	8.69
	48		11.62	13.76					8.34	8.57			
ZXD075BE	27	15.21	17.84	19.95	23.19	26.90	28.53	6.22	6.42	6.62	6.73	6.68	6.97
	32	14.46	16.96	18.93	21.95	25.38	26.88	7.09	7.21	7.42	7.47	7.45	7.79
	38	13.28	15.62	17.40	20.12	23.18	24.52	7.86	7.83	8.02	8.12	8.21	8.57
	43	12.25	14.41	16.02	18.44	21.15	22.32	8.78	8.51	8.56	8.64	8.77	9.09
	48		13.26	14.68					9.60	9.46			
ZXD100HE	27	19.33	23.44	28.28	34.01	40.80	43.86	6.92	7.62	8.43	9.37	10.44	10.90
	32	18.76	22.42	26.62	31.47	37.09	39.58	7.53	8.25	9.09	10.06	11.17	11.65
	38	17.95	21.24	24.90	28.99	33.59	35.59	8.38	9.15	10.06	11.12	12.33	12.85
	43	17.40	20.54	23.95	27.66	31.72	33.44	9.30	10.16	11.17	12.36	13.71	14.30
	48	16.29	19.27	22.45					10.55	11.55	12.73		

Notes: ¹Available on TF7 models only.
 The rating condition is based on suction superheat of 10K
 ZXD030BE and ZXD100HE rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)										Power evaporating temperature (°C)							
		-10	-5	0	5	10	12	15	18	20	22	-10	-5	0	5	10	12	15	18
ZXL020B0	27	1.32	1.55	1.87	2.26	2.73	3.27	3.89	4.59	5.36	1.10	1.20	1.29	1.36	1.43	1.49	1.55	1.59	1.63
	32	1.32	1.55	1.86	2.24	2.70	3.24	3.85	4.54	5.31	1.26	1.36	1.45	1.53	1.61	1.67	1.73	1.78	1.81
	38	1.26	1.48	1.78	2.15	2.61	3.13	3.74	4.42	5.18	1.51	1.61	1.71	1.79	1.87	1.94	2.00	2.05	2.09
	43	1.15	1.36	1.66	2.03	2.47	2.99	3.59	4.27	5.02	1.76	1.87	1.97	2.05	2.13	2.21	2.27	2.32	2.37
	48	0.99	1.20	1.49	1.85	2.29	2.81				2.05	2.16	2.26	2.35	2.44	2.51			
ZXL025B0	27	1.61	1.87	2.12	2.67	3.31	4.03	4.84	5.72	6.69	1.32	1.40	1.49	1.57	1.64	1.71	1.78	1.84	1.90
	32	1.56	1.82	2.09	2.63	3.26	3.97	4.76	5.63	6.58	1.51	1.59	1.66	1.72	1.79	1.85	1.90	1.95	2.00
	38	1.42	1.68	1.97	2.49	3.10	3.79	4.56	5.42	6.36	1.85	1.91	1.97	2.02	2.07	2.11	2.15	2.19	2.22
	43	1.23	1.48	1.79	2.30	2.89	3.57	4.33	5.17	6.09	2.22	2.27	2.31	2.35	2.39	2.43	2.45	2.48	2.50
	48	1.10	1.28	1.54	2.03	2.61	3.27				2.66	2.70	2.74	2.77	2.79	2.82			
ZXL030B0	27	1.90	2.19	2.58	3.08	3.69	4.40	5.20	6.44	7.85	1.36	1.52	1.67	1.80	1.92	2.03	2.13	2.21	2.28
	32	1.80	2.09	2.49	2.99	3.60	4.32	5.14	6.06	7.63	1.55	1.70	1.85	1.98	2.09	2.20	2.29	2.37	2.43
	38	1.58	1.87	2.27	2.77	3.39	4.10	4.92	5.85	7.30	1.92	2.07	2.21	2.33	2.45	2.54	2.63	2.70	2.76
	43	1.31	1.59	1.99	2.50	3.11	3.83	4.65	5.58	6.95	2.36	2.51	2.64	2.76	2.86	2.96	3.04	3.11	3.16
	48	1.21	1.35	1.63	2.13	2.75	3.47				2.91	3.05	3.18	3.29	3.39	3.48			
ZXL035B0 ¹	27	2.29	2.64	3.19	3.91	4.76	5.71	6.75	7.83	8.92	1.81	1.87	1.95	2.05	2.17	2.30	2.44	2.60	2.76
	32	2.12	2.47	3.02	3.72	4.56	5.49	6.50	7.55	8.62	2.08	2.16	2.25	2.36	2.48	2.62	2.78	2.94	3.11
	38	1.93	2.27	2.80	3.48	4.28	5.19	6.16	7.16	8.18	2.52	2.60	2.71	2.82	2.96	3.11	3.27	3.44	3.63
	43	1.78	2.09	2.59	3.25	4.02	4.89	5.81	6.77	7.73	2.88	2.97	3.09	3.21	3.35	3.51	3.68	3.86	4.05
	48	1.61	1.90	2.37	2.98	3.71	4.53				3.18	3.28	3.40	3.53	3.68	3.84			
ZXL040B0 ¹	27	2.80	3.42	4.16	5.03	6.02	7.14	8.39	9.76	11.26	2.27	2.43	2.59	2.76	2.94	3.12	3.32	3.52	3.73
	32	2.58	3.17	3.87	4.71	5.67	6.76	7.97	9.31	10.77	2.58	2.75	2.93	3.11	3.30	3.50	3.71	3.92	4.15
	38	2.39	2.93	3.59	4.39	5.31	6.35	7.52	8.82	10.25	3.04	3.23	3.42	3.62	3.83	4.04	4.27	4.50	4.73
	43	2.27	2.78	3.41	4.17	5.06	6.07	7.21	8.47	9.86	3.50	3.69	3.90	4.11	4.33	4.56	4.80	5.04	5.30
	48	2.21	2.68	3.28	4.01	4.86	5.83				4.01	4.22	4.44	4.67	4.91	5.15			
ZXL050B0 ¹	27	3.12	3.84	4.73	5.79	7.01	8.39	9.92	11.60	13.42	2.56	2.72	2.87	3.03	3.20	3.38	3.57	3.79	4.02
	32	2.79	3.56	4.48	5.56	6.77	8.12	9.60	11.21	12.94	2.89	3.04	3.19	3.35	3.53	3.71	3.92	4.15	4.41
	38	2.65	3.43	4.35	5.38	6.53	7.79	9.15	10.61	12.17	3.30	3.46	3.62	3.79	3.99	4.20	4.43	4.70	4.99
	43	2.56	3.31	4.16	5.00	6.16	7.30	8.52	9.81	11.18	3.68	3.85	4.04	4.24	4.46	4.70	4.98	5.28	5.62
	48	2.30	2.97	3.73	4.56	5.57	6.60				4.12	4.32	4.54	4.78	5.04	5.33			
ZXL060B0 ¹	27	3.51	4.44	5.51	6.72	8.09	9.66	11.42	13.41	15.64	3.21	3.37	3.55	3.75	3.97	4.22	4.49	4.78	5.11
	32	3.44	4.35	5.37	6.53	7.85	9.34	11.02	12.91	15.03	3.58	3.76	3.96	4.17	4.40	4.66	4.94	5.24	5.56
	38	3.28	4.17	5.17	6.29	7.55	8.98	10.58	12.37	14.38	4.05	4.27	4.51	4.76	5.02	5.30	5.60	5.93	6.28
	43	2.96	3.86	4.85	5.96	7.19	8.57	10.12	11.85	13.78	4.58	4.85	5.13	5.42	5.72	6.04	6.38	6.73	7.11
	48	2.71	3.50	4.29	5.39	6.60	7.96				5.32	5.65	5.98	6.33	6.68	7.05			
ZXL075B0 ¹	27	4.00	5.16	6.18	7.43	8.91	10.80	12.58	14.78	17.24	3.51	3.68	3.87	4.08	4.33	4.61	4.93	5.29	5.70
	32	3.76	4.71	5.84	7.17	8.68	10.40	12.31	14.44	16.78	3.88	4.06	4.28	4.52	4.79	5.10	5.45	5.84	6.28
	38	3.52	4.55	5.71	7.02	8.48	10.09	11.86	13.80	15.90	4.40	4.61	4.85	5.12	5.43	5.77	6.16	6.59	7.08
	43	3.41	4.42	5.53	6.75	8.07	9.52	11.08	12.76	14.58	4.93	5.17	5.43	5.73	6.07	6.45	6.87	7.34	7.86
	48	3.12	4.04	5.01	6.06	7.50	8.70				5.58	5.85	6.14	6.47	6.84	7.25			

Notes: ¹Available on TFD models only
 The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020B0	27	1.34	1.81	2.32	2.89	3.53	4.27	5.13	6.12	7.26	1.59	1.65	1.71	1.76	1.82	1.88	1.94	2.01	2.10
	32	1.28	1.78	2.30	2.86	3.49	4.19	5.00	5.92	6.99	1.74	1.80	1.86	1.92	1.98	2.05	2.12	2.20	2.30
	38	1.21	1.74	2.28	2.84	3.44	4.11	4.85	5.70	6.67	1.95	2.01	2.07	2.14	2.21	2.29	2.37	2.47	2.58
	43	1.11	1.67	2.22	2.78	3.36	4.00	4.69	5.48	6.37	2.17	2.23	2.30	2.37	2.45	2.54	2.62	2.74	2.88
	48	0.92	1.51	2.07	2.63	3.20	3.81	4.46	5.18	5.99	2.45	2.52	2.59	2.67	2.76	2.85	2.94	3.07	3.23
ZXL025B0	27	2.38	2.50	2.88	3.47	4.24	5.16	6.19	7.29	8.44	2.02	2.03	2.05	2.09	2.14	2.20	2.29	2.40	2.53
	32	2.36	2.48	2.82	3.38	4.11	4.99	5.97	7.03	8.13	2.23	2.25	2.29	2.33	2.40	2.48	2.58	2.70	2.84
	38	2.34	2.46	2.75	3.26	3.93	4.75	5.67	6.67	7.70	2.62	2.65	2.68	2.73	2.80	2.88	2.98	3.10	3.25
	43	2.31	2.44	2.71	3.16	3.78	4.54	5.41	6.33	7.30	3.01	3.02	3.05	3.09	3.14	3.21	3.29	3.43	3.59
	48	2.30	2.43	2.69	3.08	3.64	4.34	5.13	5.99	6.88	3.38	3.39	3.39	3.41	3.44	3.49	3.59	3.71	3.88
ZXL030B0	27	2.72	2.86	3.28	3.96	4.84	5.88	7.05	8.31	9.62	2.10	2.11	2.13	2.17	2.22	2.29	2.38	2.49	2.63
	32	2.69	2.83	3.22	3.85	4.69	5.69	6.81	8.02	9.27	2.32	2.34	2.38	2.43	2.49	2.58	2.68	2.80	2.95
	38	2.68	2.81	3.14	3.71	4.48	5.42	6.47	7.60	8.78	2.73	2.75	2.79	2.84	2.91	2.99	3.10	3.23	3.38
	43	2.66	2.80	3.09	3.60	4.31	5.18	6.16	7.22	8.32	3.13	3.14	3.17	3.21	3.27	3.34	3.43	3.56	3.74
	48	2.65	2.79	3.07	3.52	4.15	4.95	5.85	6.83	7.84	3.52	3.52	3.53	3.54	3.58	3.63	3.73	3.86	4.03
ZXL035B0	27	3.32	3.46	3.97	4.79	5.85	7.12	8.54	10.06	11.64	2.46	2.47	2.50	2.54	2.60	2.68	2.78	2.92	3.07
	32	3.30	3.45	3.90	4.66	5.67	6.88	8.24	9.70	11.22	2.71	2.74	2.78	2.84	2.92	3.01	3.14	3.28	3.46
	38	3.29	3.45	3.80	4.49	5.43	6.55	7.83	9.20	10.62	3.19	3.22	3.26	3.33	3.40	3.50	3.63	3.78	3.95
	43	3.27	3.42	3.74	4.36	5.22	6.27	7.46	8.74	10.07	3.66	3.68	3.71	3.76	3.82	3.91	4.02	4.18	4.38
	48	3.26	3.40	3.72	4.25	5.03	5.98	7.09	8.27	9.50	4.11	4.12	4.13	4.15	4.19	4.25	4.37	4.53	4.73
ZXL040B0	27	3.90	4.41	5.21	6.29	7.62	9.16	10.90	12.81	14.86	2.98	3.08	3.22	3.36	3.49	3.58	3.66	3.74	3.86
	32	3.61	4.21	5.07	6.17	7.48	8.97	10.62	12.41	14.29	3.25	3.38	3.55	3.72	3.88	3.98	4.08	4.19	4.29
	38	3.36	4.02	4.90	5.98	7.22	8.60	10.10	11.68	13.33	3.71	3.88	4.07	4.27	4.45	4.57	4.68	4.80	4.92
	43	3.16	3.83	4.69	5.70	6.85	8.10	9.43	10.81	12.21	4.17	4.36	4.58	4.80	4.98	5.11	5.23	5.36	5.49
	48	2.88	3.53	4.33	5.25	6.27	7.35	8.47	9.61	10.73	4.68	4.89	5.13	5.35	5.54	5.67	5.80	5.93	6.06
ZXL050B0	27	4.28	4.98	5.94	7.18	8.66	10.40	12.37	14.57	16.99	3.25	3.43	3.65	3.86	4.05	4.20	4.27	4.34	4.40
	32	3.90	4.71	5.73	6.97	8.42	10.06	11.88	13.88	16.04	3.57	3.76	3.98	4.21	4.42	4.58	4.67	4.77	4.86
	38	3.73	4.62	5.67	6.86	8.20	9.66	11.25	12.95	14.76	4.01	4.22	4.47	4.73	4.97	5.17	5.31	5.45	5.59
	43	3.64	4.55	5.56	6.67	7.87	9.15	10.49	11.95	13.51	4.47	4.71	5.00	5.29	5.58	5.83	5.95	6.08	6.20
	48	3.38	4.27	5.22	6.20	7.22	8.27	9.43	10.60	11.84	5.07	5.36	5.69	6.04	6.38	6.69	6.85	7.01	7.16
ZXL060B0	27	5.09	5.92	7.07	8.54	10.31	12.37	14.72	17.34	20.22	4.19	4.43	4.71	4.98	5.23	5.41	5.50	5.59	5.68
	32	4.64	5.60	6.82	8.30	10.02	11.97	14.13	16.51	19.09	4.60	4.85	5.14	5.43	5.70	5.91	6.03	6.15	6.27
	38	4.44	5.50	6.75	8.17	9.76	11.50	13.39	15.41	17.56	5.17	5.44	5.76	6.10	6.41	6.67	6.85	6.91	6.98
	43	4.33	5.41	6.62	7.94	9.37	10.89	12.48	14.22	16.07	5.76	6.08	6.45	6.83	7.20	7.52	7.68	7.85	8.03
	48	4.03	5.09	6.21	7.38	8.60	9.84	11.21	12.61	14.08	6.54	6.91	7.34	7.79	8.23	8.62	8.83	9.09	9.35
ZXL075B0	27	5.40	6.28	7.50	9.05	10.93	13.12	15.60	18.38	21.44	4.61	4.87	5.18	5.48	5.75	5.96	6.05	6.15	6.25
	32	4.91	5.93	7.23	8.80	10.62	12.68	14.98	17.50	20.23	5.06	5.34	5.65	5.97	6.27	6.50	6.63	6.76	6.90
	38	4.71	5.83	7.15	8.66	10.34	12.19	14.19	16.34	18.61	5.68	5.99	6.34	6.71	7.05	7.34	7.54	7.73	7.93
	43	4.59	5.74	7.02	8.42	9.93	11.54	13.23	15.08	17.04	6.34	6.69	7.09	7.51	7.92	8.27	8.45	8.63	8.80
	48	4.27	5.39	6.58	7.82	9.11	10.43	11.89	13.38	14.93	7.19	7.60	8.07	8.57	9.05	9.49	9.71	9.94	10.17

Notes: The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020BE	27	1.52	2.02	2.42	2.86	3.34	3.86	4.42	5.02	5.66	1.35	1.47	1.60	1.73	1.86	2.00	2.14	2.29	2.44
	32	1.45	1.82	2.24	2.70	3.19	3.73	4.31	4.92	5.58	1.50	1.60	1.71	1.83	1.95	2.08	2.21	2.34	2.48
	38	1.25	1.49	1.93	2.40	2.92	3.47	4.07	4.70	5.38	1.72	1.81	1.91	2.01	2.12	2.23	2.34	2.46	2.59
	43	1.10	1.23	1.58	2.07	2.60	3.18	3.79	4.44	5.13	1.95	2.03	2.11	2.20	2.30	2.39	2.50	2.60	2.72
	48	0.99	1.12	1.16	1.67	2.21	2.80				2.22	2.29	2.36	2.44	2.52	2.60			
ZXL025BE	27	1.89	2.31	2.80	3.37	4.02	4.74	5.54	6.42	7.37	1.59	1.68	1.77	1.87	1.97	2.23	2.36	2.50	2.64
	32	1.80	2.26	2.74	3.30	3.94	4.65	5.44	6.31	7.25	1.84	1.90	1.99	2.08	2.18	2.35	2.48	2.61	2.74
	38	1.63	2.03	2.50	3.05	3.68	4.38	5.15	6.01	6.94	2.12	2.16	2.22	2.31	2.41	2.61	2.72	2.84	2.96
	43	1.31	1.70	2.16	2.70	3.31	4.01	4.77	5.62	6.54	2.44	2.45	2.50	2.57	2.67	2.90	3.01	3.11	3.22
	48	1.20	1.24	1.69	2.22	2.82	3.51				2.89	2.90	2.91	2.98	3.08	3.28			
ZXL030BE	27	2.09	2.58	3.17	3.85	4.60	5.41	6.25	7.61	8.67	1.67	1.84	2.00	2.15	2.30	2.45	2.58	2.71	2.83
	32	2.08	2.49	3.00	3.60	4.27	5.00	5.77	7.35	8.38	1.89	2.05	2.20	2.35	2.49	2.62	2.75	2.87	2.99
	38	2.00	2.33	2.77	3.31	3.92	4.59	5.31	6.95	7.95	2.31	2.45	2.60	2.73	2.86	2.99	3.10	3.21	3.32
	43	1.73	2.03	2.44	2.95	3.54	4.19	4.89	6.55	7.52	2.77	2.91	3.05	3.18	3.30	3.41	3.52	3.62	3.72
	48	1.50	1.70	2.00	2.38	2.96	3.61				3.36	3.49	3.61	3.73	3.84	3.95			
ZXL035BE ¹	27	2.55	3.31	4.07	4.85	5.69	6.61	7.63	8.78	10.09	2.26	2.33	2.43	2.56	2.72	2.90	3.08	3.27	3.47
	32	2.47	3.20	3.94	4.68	5.48	6.35	7.31	8.40	9.63	2.59	2.67	2.79	2.93	3.11	3.31	3.52	3.74	3.96
	38	2.37	3.08	3.75	4.45	5.17	5.97	6.85	7.84	8.98	3.00	3.09	3.22	3.38	3.58	3.79	4.03	4.28	4.53
	43	2.28	2.94	3.57	4.20	4.86	5.59	6.38	7.29	8.33	3.31	3.40	3.58	3.70	3.91	4.14	4.39	4.66	4.94
	48	2.17	2.76	3.33	3.89	4.48	5.12				4.00	4.15	4.30	4.45	4.50	4.60			
ZXL040BE ¹	27	3.24	3.99	4.86	5.85	6.93	8.10	9.35	10.66	12.01	2.69	2.88	3.10	3.34	3.40	3.50	4.10	4.31	4.50
	32	3.02	3.77	4.63	5.58	6.63	7.75	8.93	10.16	11.43	2.99	3.17	3.39	3.64	3.90	4.17	4.43	4.67	4.88
	38	2.85	3.56	4.37	5.27	6.25	7.28	8.36	9.48	10.63	3.54	3.70	3.91	4.15	4.41	4.68	4.94	5.19	5.41
	43	2.67	3.34	4.10	4.93	5.83	6.77	7.75	8.76	9.78	4.08	4.22	4.40	4.62	4.87	5.12	5.38	5.63	5.85
	48	2.38	2.99	3.68	4.43	5.23	6.06				4.63	4.73	4.88	5.07	5.29	5.52			
ZXL050BE ¹	27	3.80	4.58	5.58	6.78	8.12	9.57	11.09	12.64	14.19	2.92	3.16	3.39	3.62	3.86	4.09	4.40	4.58	4.83
	32	3.52	4.31	5.29	6.43	7.69	9.04	10.42	11.81	13.17	3.26	3.49	3.72	3.96	4.20	4.46	4.72	5.00	5.29
	38	3.25	4.03	4.98	6.06	7.22	8.43	9.65	10.84	11.97	3.88	4.10	4.33	4.57	4.83	5.11	5.41	5.73	6.07
	43	2.99	3.77	4.69	5.71	6.78	7.87	8.95	9.97	10.89	4.43	4.64	4.87	5.12	5.40	5.70	6.03	6.39	6.77
	48	2.63	3.40	4.28	5.23	6.21	7.19				4.89	5.10	5.33	5.59	5.88	6.21			
ZXL060BE ¹	27	4.49	5.51	6.68	7.99	9.42	10.95	12.57	14.27	16.01	3.62	3.84	4.08	4.36	4.66	4.97	5.30	5.63	5.97
	32	4.30	5.32	6.48	7.77	9.17	10.67	12.26	13.91	15.60	4.04	4.27	4.53	4.83	5.16	5.51	5.88	6.27	6.66
	38	4.07	5.02	6.12	7.34	8.66	10.08	11.57	13.11	14.70	4.60	4.84	5.12	5.44	5.80	6.19	6.61	7.05	7.51
	43	3.81	4.67	5.67	6.79	8.00	9.30	10.67	12.09	13.54	5.17	5.41	5.69	6.03	6.42	6.84	7.30	7.78	8.29
	48	3.42	4.16	5.03	6.00	7.07	8.22				5.88	6.11	6.41	6.76	7.16	7.61			
ZXL075BE ¹	27	4.99	6.14	7.42	8.84	10.40	12.13	14.03	16.12	18.41	3.93	4.20	4.51	4.84	5.21	5.59	6.01	6.44	6.89
	32	4.75	5.90	7.14	8.50	9.99	11.61	13.39	15.33	17.45	4.35	4.63	4.94	5.30	5.68	6.10	6.55	7.03	7.53
	38	4.49	5.61	6.80	8.08	9.46	10.94	12.55	14.30	16.19	4.98	5.25	5.58	5.95	6.36	6.81	7.30	7.83	8.38
	43	4.21	5.30	6.43	7.63	8.90	10.25	11.71	13.28	14.97	5.61	5.89	6.22	6.60	7.03	7.51	8.03	8.59	9.19
	48	3.81	4.85	5.91	7.01	8.16	9.38				6.38	6.65	6.98	7.38	7.82	8.32			

Notes: ¹Available on TFD models only
 The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity									Power								
		Evaporating temperature (°C)									Evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXLD090BE	27	5.53	6.79	8.21	9.78	11.43	13.26	15.34	17.66		4.27	4.61	5.02	5.51	6.00	6.49	6.99	7.50	
	32	5.31	6.55	7.87	9.43	10.95	12.65	14.54	16.72		4.71	4.97	5.47	6.05	6.64	7.08	7.76	8.24	
	38	5.00	6.16	7.50	8.85	10.48	11.90	13.58	15.17		5.44	5.68	6.12	6.33	7.39	8.01	8.67	9.22	
	43	4.72	5.85	6.88	8.57	9.98	11.04	12.74	13.89		6.26	6.46	6.80	7.33	8.07	8.92	9.50	10.03	
	48	4.05	5.39	6.57	7.96						7.12	7.46	7.84	8.38					
ZXLD100HE	27	7.46	8.12	9.30	10.96	13.03	15.48	18.25	21.30	24.58	4.68	4.88	5.10	5.34	5.62	5.94	6.33	6.79	7.34
	32	6.55	7.34	8.58	10.24	12.25	14.57	17.16	19.96	22.92	4.90	5.25	5.58	5.91	6.24	6.59	6.96	7.38	7.86
	38	5.60	6.54	7.86	9.51	11.44	13.62	15.98	18.47	21.06	5.28	5.81	6.29	6.72	7.11	7.49	7.85	8.22	8.61
	43	5.03	6.09	7.47	9.12	10.99	13.04	15.20	17.45	19.72	5.70	6.39	6.98	7.50	7.95	8.35	8.71	9.05	9.36
	48	4.75	5.93	7.37	9.02	10.83	12.74				6.23	7.07	7.79	8.40	8.91	9.34			
ZXLD120BE	27	8.57	10.66	13.15	16.28	19.95	23.88	27.87	31.65	35.44	6.92	7.58	8.22	8.86	9.51	10.18	10.87	11.61	12.36
	32	8.25	10.33	12.72	15.68	19.09	22.83	26.71	30.47	34.24	7.89	8.64	9.37	10.09	10.79	11.51	12.26	13.02	13.73
	38	7.57	9.50	11.73	14.34	17.44	20.94	24.59	28.18	31.76	8.82	9.78	10.66	11.50	12.35	13.08	13.84	14.64	15.29
	43	7.06	9.03	10.78	13.16	16.08	19.15	22.45	25.57	28.70	9.47	10.39	11.30	12.29	13.29	14.15	14.94	15.72	16.32
	48	6.77	8.68	10.28	12.45	15.60	18.36				9.86	10.92	11.92	12.89	14.20	14.92			
ZXLD160BE	27	11.58	14.24	17.39	21.31	25.84	30.62	35.36	39.77		8.51	9.30	10.06	10.82	11.58	12.37	13.18	14.04	
	32	11.23	13.90	16.93	20.66	24.89	29.46	34.11	38.53		9.66	10.55	11.41	12.26	13.08	13.92	14.79	15.67	
	38	10.37	12.87	15.72	19.01	22.88	27.20	31.61	35.85		10.73	11.87	12.91	13.88	14.88	15.72	16.59	17.51	
	43	9.73	12.39	14.70	17.85	21.70	25.70	29.97	33.96		11.49	12.58	13.65	14.81	15.98	16.97	17.87	18.76	
	48	9.40	12.03	14.20	17.15	21.43	25.15				11.85	13.09	14.26	15.38	16.91	17.73			
ZXLD200BE	27	12.45	16.13	19.75	23.48	27.41	31.60	36.15	41.11		9.15	10.20	11.27	12.30	13.24	14.03	14.77	15.23	
	32	12.19	15.88	19.27	22.82	26.58	30.65	35.13	40.03		10.17	11.18	12.24	13.30	14.30	15.19	15.93	16.44	
	38	11.82	15.50	18.74	22.14	25.77	29.73	34.08	38.95		11.45	12.48	13.59	14.74	15.82	16.88	17.86	18.70	
	43	11.52	14.96	18.10	21.35	25.48	29.20	33.44	38.24		12.11	13.44	14.68	15.94	17.29	18.57	19.84	20.99	
	48	11.42	14.69	17.66	20.82	24.90	28.50				12.53	14.11	15.49	17.12	18.73	20.32			

Notes: The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz- PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020BE	27	1.59	2.09	2.69	3.37	4.10	4.88	5.69	6.52	7.35	1.83	1.90	1.97	2.05	2.14	2.23	2.33	2.43	2.52
	32	1.51	2.04	2.65	3.32	4.03	4.77	5.53	6.30	7.05	2.03	2.10	2.18	2.27	2.36	2.46	2.57	2.67	2.78
	38	1.46	2.01	2.61	3.26	3.93	4.62	5.31	5.98	6.62	2.29	2.37	2.46	2.56	2.66	2.77	2.89	3.00	3.12
	43	1.37	1.92	2.52	3.14	3.78	4.41	5.03	5.61	6.16	2.54	2.63	2.73	2.83	2.95	3.07	3.16	3.30	3.45
	48	1.18	1.73	2.30	2.89	3.48	4.05	4.59	5.09	5.52	2.84	2.93	3.04	3.15	3.27	3.40	3.50	3.65	3.80
ZXL025BE ¹	27	1.94	2.48	3.13	3.90	4.81	5.86	6.91	7.96	9.01	2.00	2.13	2.26	2.38	2.50	2.58	2.67	2.75	2.84
	32	1.93	2.46	3.08	3.80	4.64	5.61	6.58	7.55	8.52	2.27	2.39	2.53	2.66	2.79	2.89	3.00	3.11	3.21
	38	1.92	2.42	3.00	3.65	4.41	5.27	6.13	6.99	7.85	2.63	2.75	2.90	3.05	3.20	3.34	3.47	3.60	3.74
	43	1.86	2.33	2.85	3.45	4.12	4.88	5.65	6.41	7.17	2.98	3.11	3.27	3.45	3.62	3.78	3.94	4.11	4.27
	48	1.68	2.11	2.58	3.11	3.69	4.35	5.01	5.66	6.32	3.40	3.55	3.73	3.92	4.12	4.32	4.51	4.71	4.90
ZXL030BE ¹	27	2.66	3.24	3.95	4.78	5.67	6.59	7.51	8.43	9.35	2.29	2.39	2.52	2.68	2.83	2.96	3.09	3.22	3.35
	32	2.56	3.13	3.81	4.59	5.42	6.26	7.10	7.94	8.78	2.52	2.60	2.74	2.90	3.08	3.25	3.41	3.58	3.74
	38	2.41	2.95	3.60	4.32	5.07	5.81	6.56	7.30	8.05	2.88	2.94	3.06	3.24	3.44	3.64	3.84	4.05	4.25
	43	2.20	2.73	3.35	4.02	4.71	5.37	6.04	6.70	7.36	3.31	3.34	3.45	3.63	3.84	4.07	4.30	4.53	4.76
	48	1.89	2.41	3.00	3.62	4.25	4.83	5.42	6.00	6.59	3.91	3.91	4.00	4.17	4.39	4.65	4.90	5.15	5.40
ZXL035BE	27	2.69	3.56	4.58	5.72	6.97	8.30	9.68	11.09	12.50	2.73	2.83	2.94	3.06	3.19	3.33	3.47	3.62	3.76
	32	2.57	3.47	4.51	5.64	6.85	8.12	9.41	10.71	11.98	3.02	3.12	3.25	3.38	3.52	3.67	3.83	3.98	4.14
	38	2.48	3.41	4.44	5.54	6.69	7.86	9.03	10.17	11.26	3.41	3.53	3.66	3.81	3.97	4.13	4.30	4.47	4.65
	43	2.33	3.27	4.28	5.34	6.42	7.50	8.55	9.55	10.47	3.79	3.92	4.06	4.22	4.39	4.57	4.72	4.92	5.14
	48	2.00	2.94	3.92	4.92	5.92	6.89	7.81	8.65	9.39	4.23	4.37	4.53	4.70	4.88	5.07	5.22	5.44	5.67
ZXL040BE	27	3.54	4.52	5.70	7.10	8.75	10.66	12.57	14.49	16.40	3.11	3.30	3.50	3.69	3.87	4.00	4.13	4.27	4.40
	32	3.52	4.48	5.60	6.92	8.45	10.21	11.98	13.74	15.50	3.52	3.70	3.91	4.13	4.32	4.49	4.65	4.81	4.98
	38	3.50	4.41	5.45	6.65	8.02	9.59	11.16	12.72	14.29	4.07	4.27	4.49	4.73	4.96	5.17	5.38	5.59	5.80
	43	3.38	4.23	5.19	6.27	7.50	8.89	10.27	11.66	13.05	4.62	4.83	5.07	5.34	5.61	5.86	6.11	6.37	6.62
	48	3.05	3.84	4.70	5.66	6.72	7.92	9.11	10.31	11.50	5.27	5.50	5.78	6.08	6.39	6.69	6.99	7.29	7.60
ZXL050BE	27	5.11	5.87	6.92	8.25	9.82	11.62	13.60	15.76	18.06	3.74	4.02	4.26	4.46	4.66	4.87	5.12	5.44	5.84
	32	4.78	5.61	6.70	8.00	9.49	11.15	12.95	14.86	16.86	3.91	4.19	4.45	4.71	5.00	5.32	5.72	6.20	6.80
	38	4.32	5.23	6.31	7.55	8.92	10.39	11.93	13.52	15.14	4.80	5.03	5.27	5.53	5.85	6.24	6.72	7.32	8.07
	43	3.99	4.93	5.99	7.16	8.39	9.68	10.99	12.29	13.56	5.62	5.79	5.98	6.22	6.54	6.96	7.42	8.15	9.06
	48	3.79	4.74	5.75	6.82	7.90	8.98	10.03	11.02	11.92	6.35	6.42	6.55	6.75	7.05	7.47	7.96	8.74	9.73
ZXL060BE ¹	27	5.68	6.94	8.36	9.90	11.54	13.22	14.92	16.60	18.22	4.88	4.97	5.28	5.72	6.22	6.70	7.07	7.26	7.45
	32	5.51	6.71	8.06	9.51	11.03	12.59	14.14	15.64	17.07	5.37	5.45	5.77	6.23	6.76	7.27	7.70	7.95	8.20
	38	5.25	6.38	7.63	8.97	10.35	11.74	13.10	14.40	15.59	6.17	6.23	6.53	6.99	7.54	8.08	8.55	8.85	8.92
	43	4.98	6.04	7.21	8.45	9.71	10.95	12.15	13.27	14.26	7.04	7.06	7.33	7.78	8.32	8.87	9.24	9.64	9.85
	48	4.65	5.65	6.73	7.86	8.99	10.09	11.13	12.06	12.85	8.05	8.07	8.30	8.72	9.24	9.79	10.14	10.56	10.80
ZXL075BE ¹	27	6.49	7.45	8.79	10.48	12.47	14.75	17.28	20.02	22.94	5.23	5.63	5.96	6.24	6.52	6.82	7.17	7.61	8.17
	32	6.07	7.13	8.50	10.15	12.05	14.16	16.44	18.87	21.42	5.48	5.87	6.24	6.60	6.99	7.45	8.00	8.68	9.51
	38	5.49	6.64	8.02	9.59	11.33	13.19	15.15	17.18	19.23	6.72	7.04	7.37	7.74	8.18	8.73	9.41	10.25	11.30
	43	5.07	6.26	7.61	9.09	10.66	12.29	13.94	15.60	17.21	7.87	8.10	8.37	8.71	9.16	9.74	10.40	11.41	12.68
	48	4.81	6.01	7.31	8.66	10.04	11.40	12.73	13.98	15.13	8.89	8.99	9.16	9.44	9.86	10.45	11.15	12.24	13.63
ZXL0100HE ¹	27	5.80	7.84	10.08	12.53	15.18	18.05	21.12	24.40	27.90	4.86	5.35	5.80	6.23	6.66	7.10	7.57	8.09	8.67
	32	5.51	7.57	9.80	12.19	14.76	17.49	20.40	23.48	26.73	5.19	5.75	6.27	6.76	7.24	7.72	8.23	8.77	9.38
	38	5.07	7.17	9.38	11.72	14.18	16.77	19.48	22.32	25.28	5.63	6.28	6.88	7.45	7.99	8.54	9.09	9.68	10.32
	43	4.62	6.75	8.96	11.26	13.64	16.10	18.66	21.30	24.03	6.01	6.75	7.43	8.06	8.67	9.27	9.87	10.50	11.17
	48	4.10	6.26	8.47	10.72	13.03	15.38				6.40	7.24	8.00	8.71	9.39	10.05			

Notes: ¹Available on TF5/TF7 models only
 The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020BE	27	1.32	1.68	2.15	2.72	3.37	4.10	4.88	5.72	6.58	1.69	1.76	1.82	1.86	1.90	1.94	1.98	2.05	2.14
	32	1.25	1.59	2.04	2.59	3.22	3.91	4.67	5.47	6.29	1.74	1.83	1.90	1.96	2.01	2.06	2.11	2.19	2.28
	38	1.14	1.47	1.91	2.43	3.04	3.71	4.43	5.19	5.98	1.80	1.93	2.03	2.12	2.20	2.27	2.35	2.45	2.57
	43	1.06	1.38	1.81	2.33	2.92	3.57	4.27	5.01	5.78	2.02	2.19	2.34	2.46	2.57	2.68	2.80	2.92	3.07
	48	1.00	1.33	1.76	2.27	2.85	3.49				2.55	2.77	2.96	3.14	3.30	3.45			
ZXL025BE	27	1.58	2.05	2.64	3.38	4.18	5.11	6.16	7.32	8.54	2.06	2.15	2.18	2.23	2.24	2.28	2.33	2.45	2.59
	32	1.49	1.94	2.51	3.22	3.99	4.88	5.89	7.00	8.17	2.07	2.18	2.27	2.33	2.34	2.42	2.48	2.57	2.69
	38	1.36	1.80	2.35	3.03	3.77	4.62	5.59	6.65	7.76	2.08	2.17	2.34	2.48	2.56	2.71	2.82	2.95	3.09
	43	1.26	1.69	2.23	2.90	3.62	4.46	5.39	6.42	7.50	2.49	2.46	2.63	2.86	3.02	3.27	3.43	3.62	3.81
	48	1.20	1.62	2.16	2.82	3.54	4.36				3.18	3.38	3.44	3.71	3.99	4.32			
ZXL030BE	27	1.85	2.36	2.99	3.72	4.56	5.57	6.77	8.20	9.74	2.23	2.43	2.49	2.52	2.57	2.53	2.59	2.69	2.82
	32	1.75	2.24	2.84	3.54	4.35	5.32	6.47	7.84	9.31	2.24	2.46	2.59	2.64	2.69	2.69	2.75	2.82	2.92
	38	1.60	2.07	2.65	3.33	4.11	5.04	6.14	7.45	8.85	2.26	2.45	2.67	2.81	2.94	3.01	3.13	3.23	3.36
	43	1.48	1.94	2.52	3.19	3.95	4.86	5.93	7.19	8.55	2.70	2.78	3.00	3.24	3.46	3.64	3.81	3.97	4.13
	48	1.40	1.87	2.44	3.10	3.86	4.75				3.45	3.81	3.93	4.20	4.58	4.81			
ZXL035BE ¹	27	2.57	3.21	4.02	4.84	5.75	6.78	7.96	9.37	11.06	2.31	2.30	2.42	2.58	2.82	3.05	3.31	3.65	3.99
	32	2.52	3.16	3.92	4.69	5.54	6.51	7.63	8.98	10.58	2.65	2.63	2.74	2.90	3.15	3.39	3.66	4.03	4.40
	38	2.37	3.01	3.69	4.42	5.18	6.08	7.13	8.38	9.90	3.07	3.09	3.19	3.37	3.63	3.90	4.21	4.62	5.06
	43	2.28	2.87	3.51	4.17	4.89	5.73	6.70	7.88	9.33	3.54	3.56	3.68	3.87	4.17	4.48	4.82	5.30	5.82
	48	2.20	2.83	3.42	4.02	4.68	5.46				4.12	4.27	4.39	4.59	4.94	5.28			
ZXL040BE ¹	27	3.06	3.87	4.80	5.83	7.00	8.30	9.76	11.38	13.17	2.74	2.85	3.03	3.26	3.54	3.85	4.18	4.52	4.84
	32	2.93	3.72	4.60	5.59	6.70	7.94	9.33	10.86	12.56	3.08	3.19	3.38	3.63	3.93	4.26	4.61	4.97	5.32
	38	2.73	3.47	4.30	5.23	6.26	7.42	8.71	10.13	11.72	3.53	3.68	3.90	4.19	4.52	4.90	5.29	5.70	6.11
	43	2.56	3.26	4.04	4.90	5.86	6.94	8.14	9.47	10.95	3.98	4.17	4.44	4.77	5.16	5.58	6.04	6.50	6.92
	48	2.42	3.07	3.78	4.58	5.47	6.46				4.52	4.77	5.10	5.49	5.94	6.44			
ZXL050BE ¹	27	3.50	4.25	5.33	6.70	8.28	9.99	11.75	13.47	15.08	2.95	3.13	3.28	3.45	3.63	3.94	4.25	4.60	5.12
	32	3.23	3.97	5.04	6.36	7.87	9.51	11.15	12.74	14.20	3.39	3.56	3.72	3.87	4.05	4.36	4.61	5.03	5.56
	38	2.90	3.62	4.67	5.96	7.40	8.94	10.48	11.92	13.22	4.23	4.35	4.47	4.61	4.79	5.06	5.35	5.77	6.33
	43	2.69	3.38	4.42	5.68	7.08	8.55	10.00	11.34	12.47	4.99	4.98	5.09	5.22	5.51	5.85	6.17	6.50	6.94
	48	2.55	3.19	4.24	5.48	6.86	8.28				5.60	5.40	5.55	5.87	6.20	6.62			
ZXL060BE ¹	27	4.14	5.11	6.38	7.89	9.61	11.43	13.32	15.21	17.02	3.65	3.81	3.95	4.15	4.39	4.71	5.12	5.65	6.28
	32	3.94	4.90	6.17	7.68	9.38	11.22	13.12	15.01	16.82	4.20	4.36	4.52	4.72	4.98	5.31	5.74	6.30	7.00
	38	3.60	4.52	5.74	7.22	8.88	10.69	12.56	14.42	16.23	4.97	5.13	5.29	5.49	5.75	6.09	6.54	7.10	7.83
	43	3.33	4.18	5.34	6.75	8.36	10.11	11.93	13.75	15.51	5.67	5.81	5.95	6.14	6.40	6.74	7.19	7.76	8.49
	48	3.13	3.90	4.98	6.29	7.81	9.47				6.36	6.48	6.61	6.78	7.02	7.34			
ZXL075BE ¹	27	4.60	5.69	7.08	8.73	10.61	12.66	14.87	17.18	19.57	3.97	4.17	4.37	4.61	4.91	5.30	5.81	6.46	7.30
	32	4.36	5.44	6.80	8.41	10.22	12.21	14.33	16.54	18.82	4.53	4.73	4.93	5.17	5.48	5.88	6.40	7.07	7.92
	38	3.98	5.05	6.38	7.94	9.70	11.60	13.63	15.73	17.87	5.38	5.57	5.77	6.00	6.30	6.70	7.22	7.89	8.74
	43	3.68	4.75	6.06	7.59	9.30	11.14	13.09	15.10	17.14	6.15	6.32	6.50	6.72	7.01	7.40	7.90	8.57	9.41
	48	3.49	4.55	5.85	7.35	9.01	10.80				6.90	7.05	7.20	7.40	7.66	8.03			
ZXL0100HE ¹	27	5.90	6.50	7.58	9.12	11.17	13.74	16.88	20.67	25.18	4.43	4.44	4.53	4.71	4.98	5.36	5.85	6.47	7.21
	32	5.25	5.99	7.15	8.71	10.70	13.10	15.94	19.25	23.06	4.87	4.96	5.11	5.31	5.60	5.97	6.44	7.01	7.70
	38	4.31	5.21	6.47	8.08	10.02	12.29	14.87	17.76	20.95	5.48	5.69	5.91	6.16	6.47	6.85	7.31	7.86	8.49
	43	3.61	4.65	6.00	7.67	9.63	11.86	14.33	17.00	19.86	6.14	6.46	6.75	7.06	7.40	7.81	8.29	8.84	9.46
	48	2.96	4.08	5.49	7.18	9.13	11.29				7.03	7.48	7.87	8.25	8.66	9.12			

Notes: ¹Available on TFD models only
 The rating condition is based on a return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL020BE	20	1.64	2.13	2.76	3.54	4.43	5.44	1.66	1.74	1.82	1.86	1.93	1.93
	27	1.60	2.05	2.64	3.36	4.20	5.14	2.09	2.17	2.26	2.30	2.37	2.35
	32	1.51	1.94	2.51	3.20	4.00	4.90	2.12	2.23	2.34	2.40	2.47	2.47
	38	1.38	1.79	2.33	3.00	3.77	4.63	2.18	2.32	2.47	2.56	2.68	2.70
	43	1.27	1.68	2.21	2.86	3.62	4.46	2.41	2.61	2.80	2.94	3.09	3.15
	48	1.20	1.61	2.14	2.78	3.52	4.35	3.01	3.26	3.51	3.70	3.92	4.01
ZXL025BE ¹	20	1.96	2.59	3.40	4.40	5.50	6.79	1.99	2.11	2.19	2.27	2.34	2.36
	27	1.91	2.50	3.25	4.18	5.21	6.41	2.55	2.65	2.70	2.75	2.80	2.77
	32	1.81	2.37	3.08	3.98	4.97	6.11	2.52	2.65	2.79	2.85	2.89	2.90
	38	1.65	2.18	2.87	3.73	4.68	5.78	2.52	2.61	2.84	3.00	3.12	3.22
	43	1.52	2.05	2.72	3.56	4.49	5.56	2.97	2.93	3.15	3.42	3.63	3.84
	48	1.44	1.97	2.63	3.46	4.38	5.42	3.75	3.98	4.07	4.38	4.74	5.02
ZXL030BE ¹	20	2.34	2.98	3.84	4.84	6.00	7.40	2.15	2.38	2.50	2.58	2.61	2.62
	27	2.24	2.88	3.67	4.60	5.68	6.99	2.76	2.91	3.03	3.12	3.11	3.08
	32	2.11	2.72	3.48	4.38	5.41	6.66	2.73	2.99	3.18	3.23	3.22	3.23
	38	1.93	2.51	3.24	4.10	5.10	6.30	2.73	2.95	3.24	3.40	3.47	3.58
	43	1.78	2.36	3.08	3.92	4.89	6.06	3.22	3.30	3.60	3.87	4.04	4.27
	48	1.68	2.26	2.98	3.81	4.77	5.91	4.06	4.48	4.65	4.96	5.28	5.58
ZXL035BE	20	2.34	2.98	3.84	4.84	6.00	7.40	2.15	2.38	2.50	2.58	2.61	2.62
	27	2.24	2.88	3.67	4.60	5.68	6.99	2.76	2.91	3.03	3.12	3.11	3.08
	32	2.11	2.72	3.48	4.38	5.41	6.66	2.73	2.99	3.18	3.23	3.22	3.23
	38	1.93	2.51	3.24	4.10	5.10	6.30	2.73	2.95	3.24	3.40	3.47	3.58
	43	1.78	2.36	3.08	3.92	4.89	6.06	3.22	3.30	3.60	3.87	4.04	4.27
	48	1.68	2.26	2.98	3.81	4.77	5.91	4.06	4.48	4.65	4.96	5.28	5.58
ZXL040BE	20	3.16	4.11	5.16	6.25	7.48	8.89	2.36	2.49	2.65	2.85	3.16	3.36
	27	3.12	3.92	4.94	5.99	7.16	8.50	2.82	2.95	3.07	3.19	3.52	3.71
	32	3.05	3.84	4.80	5.79	6.89	8.15	3.23	3.20	3.36	3.55	3.88	4.07
	38	2.87	3.65	4.52	5.44	6.43	7.60	3.70	3.71	3.86	4.07	4.42	4.63
	43	2.74	3.48	4.29	5.14	6.06	7.15	4.22	4.24	4.41	4.62	5.02	5.25
	48	2.65	3.43	4.17	4.94	5.79	6.79	4.86	5.02	5.20	5.42	5.88	6.13
ZXL050BE	20	3.77	4.84	6.06	7.46	9.05	10.85	2.88	3.02	3.27	3.56	3.94	4.22
	27	3.70	4.73	5.89	7.22	8.72	10.42	3.39	3.51	3.76	4.04	4.42	4.68
	32	3.54	4.53	5.64	6.91	8.34	9.95	3.76	3.89	4.15	4.44	4.84	5.11
	38	3.29	4.22	5.27	6.45	7.78	9.27	4.26	4.42	4.72	5.06	5.50	5.81
	43	3.08	3.95	4.93	6.03	7.27	8.66	4.74	4.96	5.31	5.70	6.20	6.55
	48	2.90	3.71	4.61	5.62	6.76	8.04	5.33	5.60	6.03	6.48	7.07	7.47
ZXL060BE ¹	20	4.56	5.53	6.96	8.81	10.97	13.36	3.46	3.75	3.94	4.09	4.38	4.56
	27	4.24	5.18	6.55	8.29	10.32	12.54	3.64	3.86	4.08	4.26	4.53	4.79
	32	3.90	4.84	6.18	7.85	9.79	11.91	4.14	4.34	4.56	4.73	4.99	5.24
	38	3.50	4.41	5.72	7.34	9.19	11.18	5.10	5.23	5.42	5.57	5.82	6.01
	43	3.24	4.09	5.40	6.99	8.77	10.67	5.96	5.92	6.10	6.23	6.62	6.87
	48	3.06	3.86	5.17	6.73	8.48	10.31	6.60	6.35	6.57	6.93	7.38	7.68
ZXL075BE ¹	20	5.05	6.38	8.01	9.98	12.25	14.78	3.85	4.00	4.30	4.53	4.68	4.90
	27	5.01	6.23	7.84	9.77	11.97	14.35	4.52	4.69	4.91	5.14	5.47	5.72
	32	4.77	5.97	7.57	9.49	11.67	14.05	5.14	5.31	5.55	5.77	6.13	6.38
	38	4.35	5.49	7.03	8.89	11.02	13.36	6.00	6.18	6.41	6.63	6.99	7.23
	43	4.01	5.07	6.53	8.31	10.35	12.61	6.76	6.91	7.12	7.34	7.70	7.91
	48	3.77	4.73	6.07	7.72	9.65	11.78	7.50	7.61	7.83	8.00	8.34	8.52
ZXL100HE ¹	20	5.67	7.08	8.90	11.09	13.61	16.43	4.45	4.67	4.93	5.19	5.57	5.88
	27	5.57	6.95	8.71	10.81	13.22	15.89	4.90	5.13	5.42	5.70	6.11	6.44
	32	5.27	6.62	8.34	10.38	12.71	15.29	5.53	5.76	6.05	6.33	6.75	7.06
	38	4.80	6.13	7.81	9.79	12.04	14.50	6.49	6.70	6.99	7.25	7.67	7.95
	43	4.44	5.76	7.40	9.34	11.51	13.90	7.34	7.52	7.79	8.03	8.43	8.68
	48	4.20	5.51	7.13	9.02	11.14	13.45	8.14	8.28	8.52	8.73	9.11	9.32
ZXL020BE	50	4.10	5.41	7.02	8.89	10.98	13.25	8.49	8.60	8.82	9.01	9.37	9.55
	27	4.59	6.27	8.21	10.43	13.01	16.01	4.61	4.87	5.15	5.49	5.90	6.40
	32	4.41	6.18	8.16	10.38	12.89	15.73	5.17	5.44	5.73	6.08	6.49	7.00
	38	3.90	5.71	7.73	9.96	12.42	15.14	5.85	6.15	6.47	6.83	7.27	7.81
ZXL025BE ¹	43	3.32	5.15	7.21	9.47	11.95	14.65	6.48	6.83	7.18	7.59	8.07	8.67
	48	2.56	4.30	6.31	8.54	10.98	13.63	7.23	7.66	8.08	8.56	9.12	9.82

Notes: ¹Available on TF5/TF7 models only
 The rating condition is based on a return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

ZX Family: Medium temperature

Technical data at 50 Hz - PFJ

Family			ZX				
Nominal Rating	Horsepower	HP	2	2.5	3	4	
Model Name			ZX020B0 ZX020BE	ZX025B0 ZX025BE	ZX030B0 ZX030BE	ZX040B0 ZX040BE	
Performance	R22	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	R404A (R507A)	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	R407F	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	Sound Pressure Level	@1m	dB(A)				
	Compressor	Rated Load Ampere	R22				
			R404A (R507A)	Amp	13.2	14.6	16.4
R407F							
Locked Rotor Ampere		R22					
		R404A (R507A)	Amp	58.0	61.0	82.0	114.0
	R407F						
Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE				
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	1.18	1.33		1.83	
Fan Motor	Number of Fan		Pieces	1			
	Diameter		mm	450			
	Fan Speed		rpm	933			
	Air Flow	Total	m ³ /h	3483			
	Total Fan Motor Power	Input	W	116			
Others	Oil Separator	Volume	Liters	0.5			
	Receiver Volume	R22		5.1			
		R404A (R507A)	kg	4.4			
		R407F		4.5			
	Pipes	Suction OD		x3/4			
		Liquid OD	Inch	1/2			
Dimension	W x D x H	mm	1029 x 424 x 840				
Weight	Net		76	79	79	100	
	Gross	kg	114	117	117	138	

ZX Family: Medium temperature

Technical data at 50 Hz - TFD

Family			ZX								
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	7.6		
Model Name			ZX020B0	ZX030B0	ZX040B0	ZX050B0	ZX060B0	ZX075B0	ZX076B0		
			ZX020BE	ZX030BE	ZX040BE	ZX050BE	ZX060BE	ZX075BE	ZX076BE		
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	3.85	5.53	7.57	9.30	11.20	12.60	12.85	
		COP	W/W	2.41	2.43	2.43	2.66	2.60	2.57	2.65	
	R404A (R507A)	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	4.30	6.00	7.80	10.70	11.80	13.20	13.46	
		COP	W/W	2.26	2.35	2.29	2.40	2.41	2.40	2.50	
	R407F	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	4.40	6.31	8.37	10.49	11.68	12.73	12.98	
		COP	W/W	2.32	2.38	2.38	2.44	2.56	2.56	2.55	
	Sound Pressure Level	@1m	dB(A)	56	56	56	60	60	60	60	
	Compressor	Rated Load Ampere	R22	Amp	4.3	5.7	7.4	8.9	11.5	12.0	12.0
			R404A (R507A)	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8
R407F			Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8	
Locked Rotor Ampere		R22	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0	
		R404A (R507A)	Amp								
		R407F	Amp								
Oil Type		R22 R404A (R507A) R407F		MINERAL POE POE							
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	1.18	1.33	1.83	1.83	1.66	1.66	1.66		
Fan Motor	Number of Fan		Pieces	1	1	1	2	2	2	2	
	Diameter		mm	450							
	Fan Speed		rpm	830							
	Air Flow	Total	m ³ /h	2922	2922	2922	5910	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	246	246	246	246	
Others	Oil Separator	Volume	Liters	0.5							
	Receiver Volume	R22	kg	5.1	5.1	5.1	7.2	7.2	7.2	7.2	
		R404A (R507A)	kg	4.4	4.4	4.4	6.3	6.3	6.3	6.3	
		R407F	kg	4.5	4.5	4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD	Inch	1/2							
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242		
Weight	Net	kg	76	79	100	108	112	118	121		
	Gross	kg	114	117	121	152	156	162	154		

ZX Family: Medium temperature

Technical data at 60 Hz - PFV/TF5/TF7

Family			ZX						
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	
Model Name			ZX020B0 ZX020BE	ZX030B0 ZX030BE	ZX040B0 ZX040BE	ZX050B0 ZX050BE	ZX060B0 ZX060BE	ZX075B0 ZX075BE	
Performance	R22	ET/AT/RGT	-6.7/32/18.3						
		Capacity	4.79	6.49	9.52	10.76	12.77	14.18	
		COP	2.42	2.37	2.56	2.51	2.45	2.37	
	R404A (R507A)	ET/AT/RGT	-6.7/32/18.3						
		Capacity	5.10	7.30	10.16	12.46	14.48	15.28	
		COP	2.37	2.27	2.48	2.43	2.42	2.22	
	R407F	ET/AT/RGT	-6.7/32/18.3						
		Capacity	5.44	7.79	10.34	12.95	14.42	15.72	
		COP	2.29	2.35	2.35	2.41	2.53	2.52	
	Sound Pressure Level	@1m	dB(A)	56	56	60	60	60	60
	Compressor	Rated Load Ampere	R22	-/8.9/5.0	-/11.4/7.5	-/15.0/9.3	-/20.7/10.7	-/20.7/10.7	-/25.0/12.1
			R404A (R507A)	15.7/8.9/5.1	20.7/12.1/7.4	25.0/15.7/9.6	30.8/24.0/12.4	-/23.1/12.6	-/26.0/14.1
R407F			-/8.9/5.1	-/12.1/7.4	-/15.7/9.6	-/24.0/12.4	-/23.1/12.6	-/26.0/14.1	
Locked Rotor Ampere		R22	-/55.0/27.0	-/77.0/39.0	-/115.0/54.0	-/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
		R404A (R507A)	61.0/27.0/61.0	95.0/77.0/39.0	137.0/115.0/54.0	144.0/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
		R407F	-/55.0/27.0	-/77.0/39.0	-/115.0/54.0	-/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
Oil Type		R22 R404A (R507A) R407F	MINERAL POE POE						
Oil Recharge Volume		R22/R404A (R507A)/R407F	Liters	1.18	1.33	1.83	1.83	1.66	1.66
Fan Motor		Number of Fan	Pieces	1	1	2	2	2	2
	Diameter	mm	450						
	Fan Speed	rpm	933						
	Air Flow	Total	m³/h	3483	3483	6966	6966	6966	6966
	Total Fan Motor Power	Input	W	145	145	290	290	290	290
Others	Oil Separator	Volume	Liters						
	Receiver Volume	R22	5.1	5.1	7.2	7.2	7.2	7.2	
		R404A (R507A)	4.4	4.4	6.3	6.3	6.3	6.3	
		R407F	4.5	4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD Liquid OD	Inch	3/4 1/2					
	Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242
Weight	Net	kg	76	79	100	108	112	112	
	Gross	kg	114	117	135	152	156	162	

ZXB Family: Medium temperature

Technical data at 50 Hz - TFD

Family				ZXB							
Nominal Rating	Horsepower	HP	1.5	2	2.5	3	3.5	4	5	5.5	
Model Name			ZXB015BE	ZXB020BE	ZXB025BE	ZXB030BE	ZXB035BE	ZXB040BE	ZXB050BE	ZXB060BE	
Power			3								
Performance	ET/AT/RGT	°C	-6.7/32/18.3								
	R134a Capacity	kW	3.20	3.76	3.92	4.96	6.61	7.23	8.52	9.38	
		COP	2.73	3.01	2.74	2.86	2.88	2.94	2.91	2.65	
	Sound Pressure Level	@1m dB(A)	56					60			
Compressor	Rated Load Ampere	R134a	Amp	5.0	5.6	5.6	7.1	7.1	7.9	10.0	12.1
	Locked Rotor Ampere	R134a	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0
	Oil Type	R134a		POE							
	Oil Recharge Volume	R134a		0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77
	Oil Initial Volume	R134a	Liters	0.74	0.74	0.74	1.36	1.36	1.36	1.89	1.89
Fan Motor	Number of Fan		Pieces	1	1	1	1	1	2	2	2
	Diameter		mm	450							
	Fan Speed		rpm	830							
	Air Flow	Total	m ³ /h	2922	2922	2922	2922	2922	5910	5910	5910
	Fan Motor Power	Input	W	116	116	116	116	116	246	246	246
Others	Oil Separator	Volume	Liters	0.5							
	Receiver Volume	R134a	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	7.2
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8
		Liquid OD	Inch	1/2							
	Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242
Weight	Net	kg	79	81	81	93	93	106	116	121	
	Gross	kg	117	119	119	131	131	150	160	165	

ZXD Family: Digital medium temperature

Technical data at 50 Hz - TFD

Family				ZXD										
Nominal Rating	Horse-power	HP		3	4	5	6	7.5	7.6	9	10	12	16	20
Model Name				ZXD030B0	ZXD040B0	ZXD050B0	ZXD060B0	ZXD075B0	ZXD076B0	/	/	/	/	/
				ZXD030BE	ZXD040BE	ZXD050BE	ZXD060BE	ZXD075BE	ZXD076BE	ZXD090BE	ZXD100HE	ZXD120BE	ZXD160BE	ZXD200BE
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3										
		Capacity	KW	5.49	7.76	9.30	11.0	12.84	13.09	/	/	/	/	/
		COP	W/W	2.60	2.67	2.65	2.64	2.53	2.67	/	/	/	/	/
	R404A (R507A)	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-7/32/18	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3
		Capacity	KW	5.82	8.30	10.70	11.80	13.20	13.46	15.00	18.80	24.22	29.81	37.86
		COP	W/W	2.45	2.47	2.43	2.41	2.43	2.49	2.39	2.60	2.41	2.37	2.34
	R407F	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-7/32/18	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3
		Capacity	KW	6.04	8.28	10.34	11.26	13.63	13.90	/	17.86	/	/	/
		COP	W/W	2.47	2.71	2.73	2.46	2.40	2.50	/	2.63	/	/	/
	Sound Pressure Level	@1m	dB(A)	56	60	60	60	60	60	62	62	65	69	72
Compressor	Rated Load Ampere	R22	Amp	7.4	7.9	10.0	10.0	12.1	12.1	/	/	/	/	/
		R404A (R507A)	Amp	7.4	7.7	10.4	12.4	12.4	12.4	12.7	14.6	9.6+10.1	11.1+11.1	14.6+14.6
		R407F	Amp	7.4	7.9	10.0	12.1	12.1	12.1	/	14.6	/	/	/
	Locked Rotor Ampere	R22	Amp	40.0	48.0	64.0	74.0	100.0	100.0	/	/	/	/	/
		R404A (R507A)	Amp	40.0	48.0	64.0	74.0	100.0	100.0	100.0	102.0	74.0	74.0	102.0
		R407F	Amp	40.0	48.0	64.0	74.0	100.0	100.0	/	102.0	/	/	/
Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE											
Oil Recharge Volume	R22 R404A (R507A) R407F	Liters	1.12	1.24	1.77	1.77	1.77	1.77	1.89	1.9	1.9+1.8	1.9+1.9		
Fan Motor	Number of Fan	Pieces	1	3	2	2	2	2	2	2	2	2	3	
	Diameter	mm	450	450	450	450	450	450	450	560	590	590	600	
	Fan Speed	rpm	830	830	830	830	830	830	830	900	850	850	860	
	Air Flow	Total	m³/h	2922	5910	5910	5910	5910	5910	5910	12000	19280	19280	23400
	Total Fan Motor Power	Input	W	116	246	246	246	246	246	246	500	950	950	1350
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	2.5	2.5	3
	Receiver Volume	R22	kg	5.1	7.2	7.2	7.2	7.2	7.2	/	/	/	/	/
		R404A (R507A)	kg	4.4	6.3	6.3	6.3	6.3	6.3	6.3	12	17	17	17
		R407F	kg	4.5	6.4	6.4	6.4	6.4	6.4	/	12	/	/	/
	Pipes	Suction OD	Inch	3/4	7/8	7/8	7/8	7/8	7/8	7/8	1 1/8	1 3/8	1 3/8	1 3/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1321 x 564 x 1815	1619 x 1010 x 1124	1619 x 1010 x 1124	2033 x 857 x 1913	
Weight	Net	kg	85	104	112	114	119	122	135	165	357	362	550	
	Gross	kg	123	148	156	158	163	171	182	220	457	462	600	

ZXD Family: Digital medium temperature

Technical data at 60 Hz - TF5/TF7

Family			ZXD						
Nominal Rating	Horsepower	HP	3	4	5	6	7.5	10	
Model Name			ZXD030B0	ZXD040B0	ZXD050B0	ZXD060B0	ZXD075B0	/	
			ZXD030BE	ZXD040BE	ZXD050BE	ZXD060BE	ZXD075BE	ZXD100HE	
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	
		Capacity	kW	5.93	8.46	10.84	12.79	13.99	/
		COP	W/W	2.39	2.45	2.45	2.43	2.40	
	R404A (R507A)	ET/AT/RGT	°C	-10/32/18.3					
		Capacity	kW	6.33	8.70	10.77	12.54	13.84	20.19
		COP	W/W	2.23	2.18	2.11	2.12	2.08	2.49
	R407F	ET/AT/RGT	°C	-10/32/18.3					
		Capacity	kW	6.66	8.06	9.98	11.53	14.46	18.76
		COP	W/W	2.33	2.11	2.13	2.13	2.04	2.63
	Sound Pressure Level	@1m	dB(A)	56	60	60	60	60	62
Compressor	Rated Load Ampere	R22	Amp		17.1/9.3	20.7/10.7	20.7/12.5	25.0/14.3	/
		R404A (R507A)		-6.1	16.7/9.6	23.7/11.6	25.4/12.9	30.0/14.6	31.5/15.1
		R407F			16.7/9.6	23.7/11.6	25.4/12.9	30.0/14.6	31.5/15.1
	Locked Rotor Ampere	R22							/
		R404A (R507A)		-38	110.0/54.0	137.0/64.0	156.0/70.0	164.0/78.0	224.0/119.6
		R407F							224.0/119.6
	Oil Type	R22		MINERAL					
		R404A (R507A)		POE					
		R407F		POE					
Oil Recharge Volume	R22	Liters	1.12	1.24	1.77	1.77	1.77	/	
	R404A (R507A)		1.12	1.24	1.77	1.77	1.77	1.9	
	R407F		1.12	1.24	1.77	1.77	1.77	1.9	
Fan Motor	Number of Fan	Pieces	1	2	2	2	2	2	
	Diameter	mm	450	450	450	450	450	560	
	Fan Speed	rpm	830	933	933	933	933	900	
	Air Flow	Total	m³/h	2922	6966	6966	6966	6966	12000
	Total Fan Motor Power	Input	W	116	290	290	290	290	500
Others	Oil Separator	Volume	Liters	0.5					
	Receiver Volume	R22	kg	5.1	7.2	7.2	7.2	7.2	/
		R404A (R507A)		4.4	6.3	6.3	6.3	6.3	12
		R407F		4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	7/8	7/8	7/8	7/8	1 1/8
		Liquid OD		1/2					
Dimension	W x D x H	mm	1029x424x840	1029x424x1242	1029x424x1242	1029x424x1242	1029x424x1242	1321x564x1815	
Weight	Net	kg	85	109	117	121	127	170	
	Gross		123	148	156	158	163	225	

ZXL Family: Low temperature

Technical data at 50 Hz - PFJ

Nominal Rating	Family		ZXL			
	Horsepower	HP	2	2.5	3	
Model Name			ZXL020B0	ZXL025B0	ZXL030B0	
			ZXL020BE	ZXL025BE	ZXL030BE	
Performance	R22	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	1.72	1.91	2.34
		COP	W/W	1.2	1.17	1.28
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	2.11	2.51	2.8
		COP	W/W	1.24	1.28	1.29
	R407F	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	1.86	2.29	2.6
		COP	W/W	0.99	1.02	1.02
	Sound Pressure Level	@1m	dB(A)	56		
	Compressor	Rated Load Ampere	R22			
			R404A (R507A)	Amp	12.7	13.3
R407F						
Locked Rotor Ampere		R22				
	R404A (R507A)	Amp	56.6	73.7	82.3	
	R407F					
Oil Type	R22		MINERAL			
	R404A (R507A)		POE			
	R407F		POE			
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	0.56			
Fan Motor	Number of Fan		Pieces	1		
	Diameter		mm	450		
	Fan Speed		rpm	830		
	Air Flow	Total	m³/h	2922		
	Total Fan Motor Power	Input	W	116		
Others	Oil Separator	Volume	Liters	0.5		
	Receiver Volume	R22		5.1	5.1	7.5.1
		R404A (R507A)	kg	4.4		
		R407F		4.5		
	Pipes	Suction OD	Inch	3/4		
		Liquid OD		1/2		
Dimension	W x D x H	mm	1029 x 424 x 840			
Weight	Net	kg	79	81	81	
	Gross		117	119	119	

ZXL Family: Low temperature

Technical data at 50 Hz - TFD

Nominal Rating	Family			ZXL								
		Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5	
Model Name				ZXL020B0	ZXL025B0	ZXL030B0	ZXL035B0	ZXL040B0	ZXL050B0	ZXL060B0	ZXL075B0	
				ZXL020BE	ZXL025BE	ZXL030BE	ZXL035BE	ZXL040BE	ZXL050BE	ZXL060BE	ZXL075BE	
Performance	R22	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	1.72	1.91	2.34	2.78	3.57	4.05	4.96	5.39	
		COP	W/W	1.20	1.17	1.28	1.26	1.24	1.29	1.27	1.28	
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	2.11	2.51	2.8	3.65	4.26	4.99	5.91	6.65	
		COP	W/W	1.24	1.28	1.29	1.34	1.29	1.36	1.33	1.38	
	R407F	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	1.86	2.29	2.60	3.61	4.25	4.61	5.66	6.25	
		COP	W/W	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29	
	Sound Pressure Level	@1m	dB(A)	56					60			
	Compressor	Rated Load Ampere	R22	Amp	5.4	5.5	5.7	7.4	8.1	8.8	11.1	12.1
			R404A (R507A)		5.6	6.2	6.0	8.3	8.6	10.0	11.1	14.6
R407F			5.6		6.2	6.5	8.3	8.6	10.0	11.1	14.6	
Locked Rotor Ampere		R22	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0	
		R404A (R507A)										
		R407F										
Oil Type		R22		MINERAL								
	R404A (R507A)	POE										
	R407F	POE										
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77		
Fan Motor	Number of Fan		Pieces	1	1	1	1	1	2	2	2	
	Diameter		mm	450								
	Fan Speed		rpm	830								
	Air Flow	Total	m³/h	2922	2922	2922	2922	2922	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	116	116	246	246	246	
Others	Oil Separator	Volume	Liters	0.5								
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	7.2	
		R404A (R507A)		4.4	4.4	4.4	4.4	4.4	6.3	6.3	6.3	
		R407F		4.5	4.5	4.5	4.5	4.5	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD		1/2								
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242		
Weight	Net	kg	79	81	81	93	93	106	116	121		
	Gross		117	119	119	131	131	150	165	170		

ZXLD Family: Low temperature

Technical data at 50 Hz -TFD

Family			ZXLD					
Nominal Rating	Horsepower	HP	9	10	12	16	20	
Model Name			ZXLD090BE	ZXLD100HE	ZXLD120BE	ZXLD160BE	ZXLD200BE	
Performance	ET/AT/RGT	°C	-32/32/5					
	R404A (R507A) Capacity	kW	7.24	8.03	11.76	15.72	17.91	
	COP	W/W	1.38	1.47	1.30	1.42	1.52	
	Sound Pressure Level @1m	dB(A)	62	62	69	69	72	
Compressor	Rated Load Ampere	R404A (R507A) Amp	14.6	14.6	11.1+11.1	14.6 + 14.6	14.6 + 14.6	
	Locked Rotor Ampere	R404A (R507A) Amp	102	102	74	102	121	
	Oil Type	R404A (R507A)	POE					
	Oil Recharge Volume	Liters	1.89	1.9	1.9 + 1.9	1.9 + 1.9	1.9 + 1.9	
Fan Motor	Number of Fan	Pieces	2	2	2	2	3	
	Diameter	mm	450	560	590	590	600	
	Fan Speed	rpm	830	900	850	850	860	
	Air Flow Total	m³/h	5910	12000	19280	19280	23400	
	Total Fan Motor Power Input	W	246	500	950	950	1350	
Others	Oil Separator Volume	Liters	0.5	0.5	2.5	2.5	3	
	Receiver Volume (at 32°C)	kg	6.3	12	17	17	17	
	Pipes	Suction OD	Inch	7/8	1 1/8"	1 3/8	1 3/8	1 3/8
		Liquid OD		1/2	1/2"	3/4	3/4	3/4
	Dimension	W x D x H	mm	1029 x 424 x 1242	1321 x 564 x 1815	1619 x 1010 x 1124	1619 x 1010 x 1124	2033 x 857 x 1913
Weight	Net	kg	138	170	362	362	470	
	Gross		158	225	462	462	550	


ZXL Family: Low temperature

Technical data at 60 Hz - PFV/TF5/TF7


Nominal Rating	Family			ZXL								
		Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5	10
Model Name				ZXL020B0	ZXL025B0	ZXL030B0	ZXL035B0	ZXL040B0	ZXL050B0	ZXL060B0	ZXL075B0	/
				ZXL020BE	ZXL025BE	ZXL030BE	ZXL035BE	ZXL040BE	ZXL050BE	ZXL060BE	ZXL075BE	ZXLD100HE
Performance	R22	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.09	2.69	2.99	3.71	4.72	5.32	6.34	6.81	/
		COP	W/W	1.14	1.18	1.28	1.34	1.36	1.37	1.27	1.24	/
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.41	2.83	3.54	4.19	5.18	6.26	7.52	7.98	8.89
		COP	W/W	1.12	1.15	1.32	1.33	1.44	1.29	1.32	1.46	
	R407F	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.28	2.80	3.18	4.42	5.20	5.64	6.93	7.65	7.34
		COP	W/W	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29	1.31
	Sound Pressure Level	@1m	dB(A)	56	56	56	56	60	60	60	60	62
Compressor	Rated Load Ampere	R22	Amp	-/	-/	-/	-/	-/	-/	-/	-/	/
		R404A (R507A)	Amp	12.1/5.4	12.6/5.5	12.9/6.9	19.1/7.7	20.0/9.9	21.4/12.6	25.5/14.1	28.9/14.4	/
		R407F	Amp	16.4/12.1/5.6	-/12.6/6.2	-/12.6/6.9	26.4/19.1/8.6	30.4/20.0/9.9	34.1/21.4/12.6	-/25.5/14.1	-/28.9/14.4	-/31.5/15.1
	Locked Rotor Ampere	R22	Amp	-/	-/	-/	-/	-/	-/	-/	-/	/
		R404A (R507A)	Amp	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3	/
		R407F	Amp	68.0/73.0/34.8	-/73.0/34.8	-/73.0/38.6	137.0/110.0/47.0	141.0/110.0/66.0	176.0/110.0/73.5	-/186.6/94.3	-/191.0/94.3	-/224/119.6
	Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE								
	Oil Recharge Volume	R22 R404A (R507A) R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	/
				0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	1.9
				0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	1.9
Fan Motor	Number of Fan	Pieces	1	1	1	1	2	2	2	2	2	
	Diameter	mm	450	450	450	450	450	450	450	450	560	
	Fan Speed	rpm	933	933	933	933	933	933	933	933	900	
	Air Flow	Total	m³/h	3483	3483	3483	3483	6966	6966	6966	6966	12000
	Total Fan Motor Power	Input	W	145	145	145	145	290	290	290	290	500
Others	Oil Separator	Volume	Liters	0.5								
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	/
		R404A (R507A)	kg	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	12
		R407F	kg	4.5	4.5	4.5	4.5	6.4	6.4	6.4	6.4	12
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8	1 1/8"
Liquid OD		Inch	1/2									
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1321 x 564 x 1815	
Weight	Net	kg	79	81	81	93	93	106	116	121	175	
	Gross	kg	117	119	119	131	143	150	165	170	230	

Dimensional drawings


ZX-PFJ (2 HP-4 HP)
 ZX-TFD (2HP-4HP), ZX-PFV/TF5/TF7 (2HP-3HP), ZXB-TFD (1.5HP-3.5HP)
 ZXL-PFJ (2HP-3HP)
 ZXL-TFD (2HP-4HP), ZXL-PFV (2HP, 3.5HP), ZXL-TF5/7 (2HP-3.5HP)
 ZXD-TFD (3HP), ZXD-TF7(3HP)

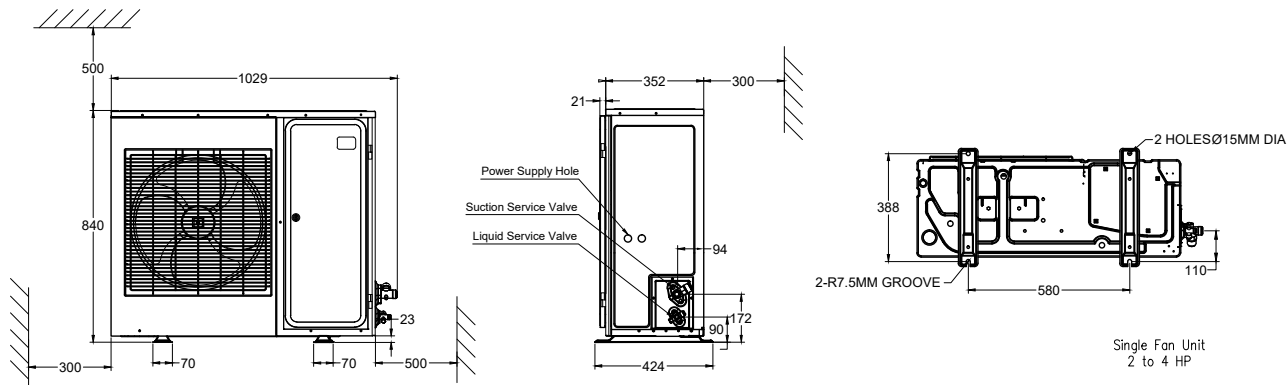

ZX-TFD (5HP-7.6HP), ZX-PFV (4HP-5HP), ZX-TF5/7 (4HP-7.5HP), ZXB-TFD (4HP-6HP)
 ZXL-TFD (5HP-7.5HP), ZXL-PFV (4HP-5HP), ZXL-TF5/7 (4HP-7.5HP),
 ZXD-TFD (4HP-9HP), ZXD-TF5/7 (4HP-7.5HP), ZXLD-TFD (9HP)

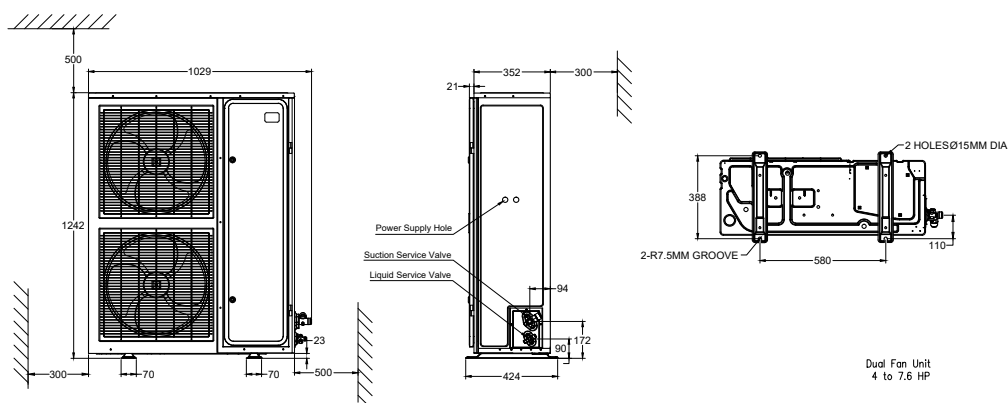


ZXD-TFD (10HP), ZXD-TF5/7 (10HP)

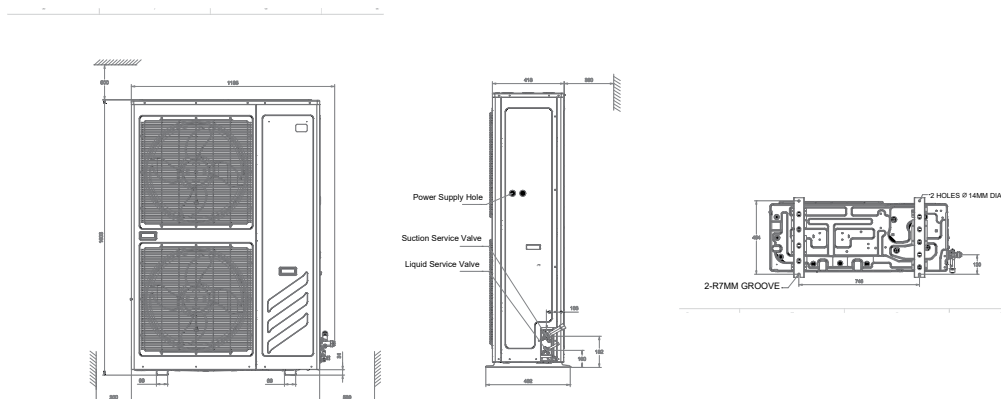


Fixing dimension and distance – Top air throw unit

Dimensional drawings

ZXD-TFD (12HP-16HP), ZXLD-TFD (12HP-16HP)

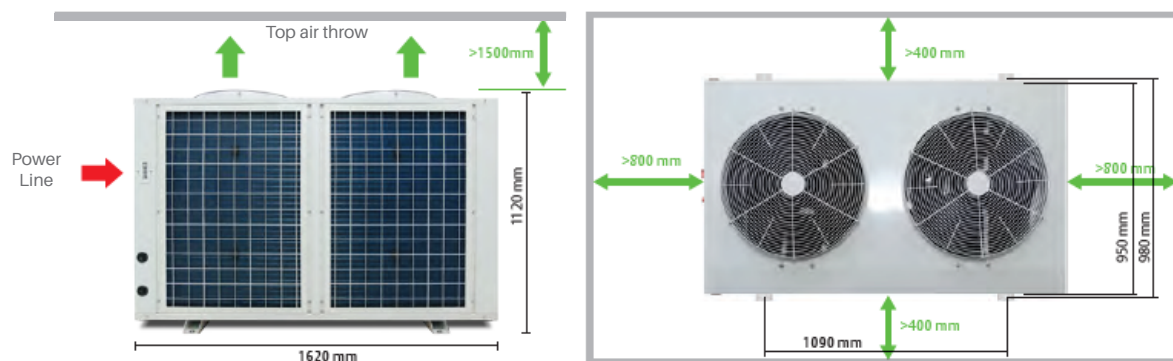

ZXD-TFD (20HP), ZXLD-TFD (20HP)

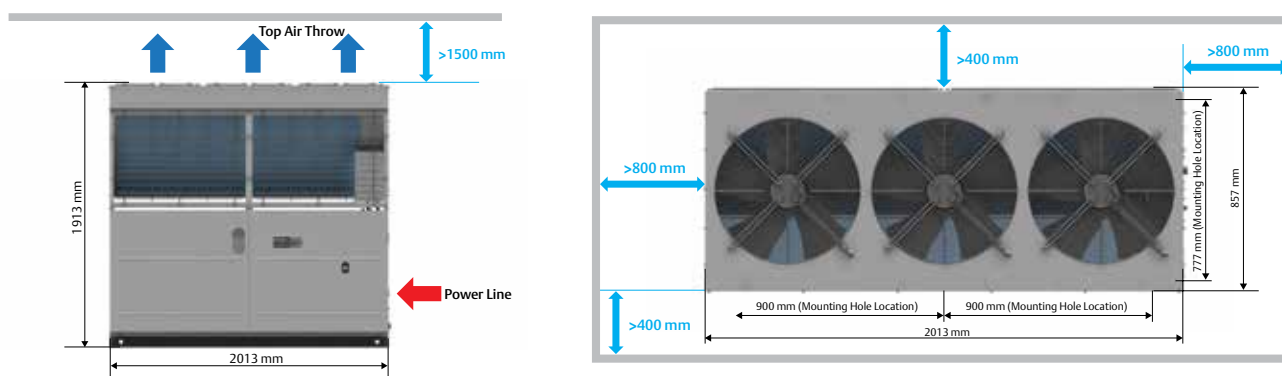

Fixing dimension and distance – Top air throw unit

Packing information

Container loading, ZX Platform condensing unit					
Family	Model	Motor code	Fan type	20FT	40FT/ 40FT H
ZX/ZXB	ZXB015BE	TFD	Single Fan	40	80
	ZXB020BE / ZX020B0(E)	PFJ/TFD/PFV/TF5/TF7			
	ZXB025BE / ZX025B0(E)	PFJ/TFD			
	ZXB030BE / ZX030B0(E)	PFJ/TFD/PFV/TF5/TF7			
	ZXB035BE	TFD			
	ZX040B0(E)	PFJ			
	ZXB040BE / ZX040B0(E)	TFD/PFV/TF5/TF7	Dual Fan	20	40
	ZXB050BE / ZX050B0(E)				
	ZXB060BE	TFD			
	ZX060B0(E)	TFD/TF5/TF7			
	ZX075B0(E)				
	ZX076B0(E)				
ZXD	ZXD030B0(E)	TFD/TF7	Single Fan	40	80
	ZXD040B0(E)	TFD/TF5/TF7	Dual Fan	20	40
	ZXD050B0(E)				
	ZXD060B0(E)				
	ZXD075B0(E)				
	ZXD076B0(E)				
	ZXD090BE	TFD			
	ZXD100HE	TFD/TF5/TF7	Large Dual Fan	10	20
	ZXD120BE	TFD	Top air throw	6	13
	ZXD160BE			5 ¹	11 ¹
ZXD200BE					
ZXL/ZXLD	ZXL020B0(E)	PFJ/TFD/TF5/TF7	Single Fan	40	80
	ZXL025B0(E)				
	ZXL030B0(E)				
	ZXL035B0(E)	TFD/TF5/TF7			
	ZXL040B0(E)	TFD			
	ZXL040B0(E)	TF5/TF7	Dual Fan	20	40
	ZXL050B0(E)	TFD/TF5/TF7			
	ZXL060B0(E)				
	ZXL075B0(E)				
	ZXLD090BE	TFD			
	ZXLD100HE	TFD/TF5/TF7	Large Dual Fan	10	20
	ZXLD120BE	TFD	Top air throw	6	13
	ZXLD160BE			5 ¹	11 ¹
ZXLD200BE					

Note: ¹High type container only

Conversion chart

Units conversion chart
KCALH x 3.9683 = BTUH
WATTS x 3.413 = BTU/H
1.80 x °C + 32 = °F
KILOGRAMS x 2.205 = POUNDS
MILLIMETERS x 0.0394 = INCHES
CUBIC CENTIMETERS x 0.06102 = CUBIC INCHES
CUBIC METERS x 35.3147 = CUBIC FEET
LITERS x 33.8181 = FLUID OUNCES
KILOWATTS x 1.341 = HORSEPOWER
BAR x 14.7 = PSI

Pressure temperature chart at sea level

°C	R-134a	R22	R404A HP 62	R407F Vapor	R407F Liquid	R407A Vapor	R407A Liquid	R407C Vapor	R407C Liquid	R408A	R410A	R502	R507A AZ50	°F
-45.6	0.63	0.21	0.00	-0.26	0.03	0.30	0.03	0.37	0.09	0.07	0.34	-0.03	0.06	-50.0
-44.4	0.61	0.16	0.05	-0.22	0.08	0.26	0.03	0.33	0.04	0.02	0.41	0.02	0.12	-48.0
-43.3	0.59	0.12	0.11	-0.17	0.14	0.22	0.08	0.29	0.01	0.04	0.48	0.08	0.18	-46.0
-42.2	0.56	0.06	0.17	-0.12	0.20	0.17	0.14	0.25	0.07	0.10	0.57	0.14	0.24	-44.0
-41.1	0.53	0.01	0.23	-0.07	0.27	0.12	0.21	0.20	0.13	0.15	0.65	0.19	0.30	-42.0
-40.0	0.50	0.04	0.30	-0.02	0.34	0.07	0.27	0.16	0.19	0.21	0.74	0.26	0.37	-40.0
-38.9	0.47	0.10	0.37	0.04	0.41	0.01	0.34	0.11	0.26	0.28	0.83	0.32	0.44	-38.0
-37.8	0.44	0.15	0.43	0.10	0.48	0.04	0.41	0.06	0.32	0.34	0.92	0.39	0.52	-36.0
-36.7	0.41	0.21	0.51	0.16	0.56	0.10	0.48	0.00	0.39	0.41	1.01	0.46	0.59	-34.0
-35.6	0.37	0.28	0.59	0.22	0.64	0.16	0.56	0.06	0.46	0.48	1.12	0.53	0.68	-32.0
-34.4	0.33	0.34	0.66	0.29	0.72	0.23	0.63	0.11	0.53	0.55	1.22	0.60	0.75	-30.0
-33.3	0.29	0.41	0.74	0.36	0.80	0.29	0.72	0.17	0.61	0.63	1.33	0.68	0.84	-28.0
-32.2	0.25	0.48	0.83	0.43	0.89	0.36	0.80	0.23	0.69	0.71	1.44	0.76	0.93	-26.0
-31.1	0.21	0.55	0.92	0.51	0.98	0.43	0.89	0.30	0.77	0.79	1.56	0.84	1.02	-24.0
-30.0	0.17	0.63	1.01	0.59	1.08	0.51	0.98	0.37	0.86	0.88	1.68	0.93	1.12	-22.0
-28.9	0.13	0.70	1.10	0.67	1.18	0.59	1.08	0.45	0.94	0.97	1.81	1.01	1.21	-20.0
-27.8	0.08	0.79	1.20	0.75	1.28	0.67	1.17	0.52	1.04	1.06	1.94	1.11	1.32	-18.0
-26.7	0.03	0.87	1.30	0.84	1.39	0.75	1.28	0.60	1.14	1.15	2.07	1.20	1.42	-16.0
-25.6	0.02	0.96	1.41	0.93	1.50	0.84	1.38	0.68	1.23	1.25	2.21	1.30	1.53	-14.0
-24.4	0.08	1.05	1.52	1.03	1.61	0.93	1.49	0.77	1.34	1.35	2.35	1.40	1.64	-12.0
-23.3	0.13	1.14	1.63	1.13	1.73	1.03	1.60	0.85	1.44	1.46	2.50	1.51	1.76	-10.0
-22.2	0.19	1.23	1.74	1.23	1.85	1.12	1.72	0.94	1.55	1.57	2.66	1.61	1.88	-8.0
-21.1	0.25	1.34	1.86	1.34	1.98	1.23	1.83	1.03	1.67	1.68	2.81	1.73	2.00	-6.0
-20.0	0.32	1.44	1.99	1.45	2.11	1.33	1.96	1.13	1.79	1.79	2.98	1.84	2.13	-4.0
-18.9	0.38	1.54	2.12	1.56	2.24	1.44	2.09	1.23	1.91	1.91	3.15	1.96	2.26	-2.0
-17.8	0.45	1.66	2.25	1.68	2.38	1.55	2.22	1.34	2.03	2.03	3.32	2.08	2.40	0.0
-16.7	0.52	1.77	2.39	1.80	2.52	1.67	2.36	1.45	2.17	2.16	3.50	2.21	2.54	2.0
-15.6	0.59	1.89	2.52	1.93	2.67	1.79	2.50	1.56	2.30	2.29	3.69	2.34	2.68	4.0
-14.4	0.66	2.01	2.67	2.06	2.82	1.92	2.65	1.68	2.43	2.43	3.88	2.48	2.83	6.0
-13.3	0.74	2.14	2.82	2.20	2.98	2.05	2.80	1.80	2.58	2.57	4.08	2.61	2.99	8.0
-12.2	0.82	2.26	2.97	2.34	3.14	2.18	2.95	1.92	2.72	2.71	4.29	2.76	3.15	10.0
-11.1	0.90	2.40	3.13	2.48	3.31	2.32	3.11	2.05	2.88	2.86	4.50	2.90	3.31	12.0
-10.0	0.99	2.54	3.30	2.63	3.48	2.46	3.28	2.19	3.03	3.01	4.72	3.06	3.48	14.0
-8.9	1.08	2.68	3.46	2.79	3.66	2.61	3.45	2.32	3.19	3.17	4.94	3.21	3.66	16.0
-7.8	1.17	2.82	3.63	2.94	3.84	2.76	3.62	2.46	3.36	3.32	5.17	3.37	3.83	18.0
-6.7	1.27	2.97	3.81	3.11	4.03	2.92	3.80	2.61	3.53	3.49	5.41	3.53	4.01	20.0
-5.6	1.37	3.12	4.00	3.28	4.22	3.08	3.99	2.77	3.71	3.66	5.65	3.70	4.21	22.0
-4.4	1.47	3.28	4.19	3.45	4.42	3.25	4.18	2.92	3.89	3.84	5.90	3.88	4.40	24.0
-3.3	1.58	3.45	4.38	3.63	4.63	3.42	4.37	3.08	4.08	4.02	6.15	4.06	4.60	26.0
-2.2	1.69	3.61	4.58	3.82	4.84	3.60	4.57	3.25	4.27	4.21	6.42	4.23	4.80	28.0
-1.1	1.80	3.79	4.78	4.01	5.05	3.78	4.78	3.42	4.46	4.39	6.69	4.43	5.01	30.0
0.0	1.92	3.97	4.99	4.21	5.28	3.97	4.99	3.59	4.67	4.59	6.97	4.62	5.23	32.0
1.1	2.03	4.15	5.21	4.41	5.51	4.17	5.21	3.78	4.88	4.79	7.26	4.81	5.45	34.0
2.2	2.16	4.34	5.43	4.62	5.74	4.37	5.43	3.97	5.09	5.00	7.55	5.02	5.68	36.0
3.3	2.28	4.53	5.66	4.84	5.98	4.57	5.67	4.16	5.31	5.21	7.86	5.23	5.91	38.0
4.4	2.41	4.73	5.89	5.06	6.23	4.79	5.90	4.36	5.53	5.43	8.17	5.44	6.15	40.0
5.6	2.55	4.93	6.12	5.29	6.48	5.00	6.14	4.56	5.77	5.65	8.48	5.66	6.39	42.0
6.7	2.69	5.14	6.37	5.52	6.74	5.23	6.40	4.77	6.00	5.88	8.81	5.89	6.65	44.0
7.8	2.83	5.35	6.62	5.76	7.01	5.46	6.66	4.99	6.25	6.12	9.14	6.12	6.90	46.0
8.9	2.98	5.57	6.88	6.01	7.28	5.70	6.92	5.21	6.50	6.36	9.48	6.35	7.17	48.0

Pressure temperature chart at sea level

°C	R-134a	R22	R404A HP 62	R407F Vapor	R407F Liquid	R407A Vapor	R407A Liquid	R407C Vapor	R407C Liquid	R408A	R410A	R502	R507A AZ50™	°F
10.0	3.13	5.80	7.14	6.26	7.57	5.94	7.19	5.43	6.75	6.60	9.83	6.59	7.44	50.0
11.1	3.29	6.03	7.41	6.52	7.85	6.19	7.46	5.67	7.01	6.86	10.20	6.84	7.72	52.0
12.2	3.45	6.26	7.70	6.79	8.15	6.44	7.74	5.91	7.28	7.11	10.57	7.10	8.01	54.0
13.3	3.61	6.51	7.98	7.07	8.45	6.71	8.03	6.16	7.56	7.38	10.94	7.35	8.30	56.0
14.4	3.79	6.76	8.27	7.35	8.76	6.98	8.33	6.41	7.84	7.65	11.34	7.62	8.59	58.0
15.6	3.96	7.01	8.57	7.64	9.08	7.26	8.63	6.68	8.13	7.93	11.73	7.89	8.90	60.0
16.7	4.14	7.27	8.88	7.94	9.40	7.54	8.94	6.94	8.43	8.21	12.14	8.17	9.21	62.0
17.8	4.32	7.54	9.19	8.24	9.74	7.83	9.26	7.22	8.74	8.50	12.56	8.46	9.54	64.0
18.9	4.51	7.81	9.50	8.55	10.08	8.13	9.59	7.50	9.05	8.80	12.99	8.74	9.86	66.0
20.0	4.70	8.09	9.83	8.88	10.43	8.44	9.92	7.79	9.37	9.10	13.42	9.04	10.20	68.0
21.1	4.90	8.37	10.17	9.20	10.78	8.76	10.26	8.09	9.69	9.42	13.87	9.34	10.54	70.0
22.2	5.11	8.67	10.51	9.54	11.15	9.08	10.61	8.39	10.03	9.74	14.32	9.66	10.89	72.0
23.3	5.32	8.97	10.86	9.89	11.52	9.41	10.97	8.70	10.37	10.06	14.79	9.98	11.25	74.0
24.4	5.53	9.28	11.22	10.24	11.90	9.75	11.34	9.03	10.72	10.40	15.27	10.30	11.62	76.0
25.6	5.75	9.59	11.59	10.60	12.29	10.10	11.71	9.35	11.07	10.74	15.76	10.63	11.99	78.0
26.7	5.98	9.90	11.96	10.98	12.69	10.46	12.09	9.69	11.43	11.09	16.26	10.97	12.38	80.0
27.8	6.21	10.23	12.34	11.36	13.10	10.82	12.48	10.03	11.81	11.44	16.77	11.32	12.77	82.0
28.9	6.45	10.57	12.73	11.75	13.52	11.19	12.88	10.39	12.19	11.81	17.29	11.67	13.17	84.0
30.0	6.69	10.91	13.13	12.15	13.94	11.57	13.28	10.75	12.58	12.18	17.83	12.03	13.58	86.0
31.1	6.94	11.26	13.54	12.55	14.38	11.97	13.70	11.12	12.98	12.56	18.37	12.40	13.99	88.0
32.2	7.19	11.61	13.96	12.97	14.82	12.37	14.12	11.50	13.39	12.94	18.93	12.78	14.42	90.0
33.3	7.46	11.98	14.39	13.40	15.27	12.78	14.56	11.88	13.80	13.34	19.50	13.16	14.86	92.0
34.4	7.72	12.35	14.82	13.84	15.74	13.20	15.01	12.28	14.23	13.74	20.08	13.55	15.30	94.0
35.6	7.99	12.73	15.26	14.29	16.21	13.63	15.46	12.69	14.66	14.16	20.68	13.95	15.76	96.0
36.7	8.28	13.12	15.72	14.74	16.69	14.06	15.92	13.10	15.10	14.58	21.28	14.36	16.22	98.0
37.8	8.57	13.51	16.18	15.21	17.19	14.51	16.39	13.52	15.55	15.01	21.90	14.78	16.70	100.0
38.9	8.86	13.92	16.66	15.69	17.69	14.97	16.87	13.96	16.01	15.45	22.53	15.20	17.18	102.0
40.0	9.15	14.32	17.14	16.18	18.20	15.44	17.36	14.41	16.48	15.90	23.18	15.63	17.67	104.0
41.1	9.46	14.74	17.63	16.68	18.72	15.92	17.86	14.86	16.96	16.35	23.84	16.08	18.17	106.0
42.2	9.77	15.17	18.13	17.19	19.26	16.41	18.37	15.32	17.45	16.82	24.51	16.52	18.69	108.0
43.3	10.10	15.61	18.65	17.71	19.80	16.91	18.89	15.79	17.95	17.29	25.20	16.99	19.21	110.0
44.4	10.42	16.06	19.17	18.25	20.36	17.43	19.42	16.28	18.46	17.78	25.90	17.45	19.74	112.0
45.6	10.76	16.51	19.70	18.79	20.92	17.94	19.97	16.78	18.97	18.27	26.61	17.93	20.29	114.0
46.7	11.10	16.97	20.25	19.35	21.50	18.48	20.52	17.28	19.50	18.77	27.34	18.41	20.85	116.0
47.8	11.45	17.45	20.81	19.92	22.09	19.03	21.08	17.80	20.04	19.29	28.09	18.91	21.41	118.0
48.9	11.81	17.93	21.37	20.50	22.69	19.59	21.66	18.33	20.59	19.81	28.85	19.41	21.99	120.0
50.0	12.17	18.42	21.95	21.10	23.30	20.16	22.23	18.87	21.15	20.34	29.62	19.92	22.59	122.0
51.1	12.54	18.92	22.54	21.71	23.92	20.74	22.83	19.42	21.72	20.89	30.41	20.45	23.19	124.0
52.2	12.92	19.43	23.14	22.33	24.55	21.33	23.44	19.99	22.30	21.44	31.22	20.99	23.80	126.0
53.3	13.31	19.94	23.75	22.96	25.20	21.94	24.06	20.56	22.90	22.01	32.04	21.52	24.43	128.0
54.4	13.70	20.48	24.38	23.61	25.86	22.56	24.68	21.14	23.50	22.58	32.88	22.08	25.07	130.0
55.6	14.11	21.01	25.02	24.27	26.53	23.19	25.32	21.75	24.12	23.17	33.74	22.65	25.72	132.0
56.7	14.52	21.56	25.67	24.94	27.21	23.84	25.98	22.36	24.74	23.77	34.61	23.22	26.39	134.0
57.8	14.94	22.12	26.34	25.63	27.90	24.50	26.64	22.99	25.38	24.37	35.50	23.81	27.06	136.0
58.9	15.37	22.69	27.01	26.34	28.61	25.18	27.32	23.63	26.03	24.99	36.41	24.40	27.75	138.0
60.0	15.81	23.27	27.70	27.06	29.33	25.87	28.01	24.28	26.69	25.62	37.34	25.01	28.46	140.0
61.1	16.26	23.86	28.41	27.79	30.07	26.57	28.71	24.94	27.36	26.27	38.29	25.62	29.18	142.0
62.2	16.71	24.46	29.13	28.54	30.81	27.29	29.43	25.63	28.04	26.92	39.26	26.26	29.92	144.0
63.3	17.17	25.07	29.87	29.31	31.57	28.02	30.15	26.32	28.74	27.59	40.24	26.90	30.67	146.0
64.4	17.65	25.69	30.61	30.09	32.35	28.77	30.90	27.03	29.45	28.27	41.25	27.54	31.43	148.0
65.6	18.13	26.32	31.39	30.89	33.13	29.54	31.65	27.76	30.17	28.96	42.28	28.21	32.22	150.0



About Copeland

Copeland, a global provider of sustainable climate solutions, combines category-leading brands in compression, controls, software and monitoring for heating, cooling and refrigeration. With best-in-class engineering and design and the broadest portfolio of modulated solutions, we're not just setting the standard for compressor leadership; we're pioneering its evolution. Combining our technology with our smart energy management solutions, we can regulate, track and optimize conditions to help protect temperature-sensitive goods over land and sea, while delivering comfort in any space. Through energy-efficient products, regulation-ready solutions and expertise, we're revolutionizing the next generation of climate technology for the better. For more information, visit copeland.com.

Scan to visit:



[Copeland.com](https://copeland.com)

To learn more, visit copeland.com

Asia 01 00 Issued 10/2019
©2024 Copeland LP. All rights reserved.

COPELAND

Copeland scroll ZX condensing unit

For refrigeration applications.





ZX condensing unit for refrigeration applications.

Copeland offers the ZX platform refrigeration condensing units specifically designed for medium temperature (ZX-MT & ZXB-MT), low temperature (ZXL-LT), digital modulated variable capacity medium temperature and low temperature (ZXD-MT & ZXLD-LT) refrigeration.

ZX series CDU has been highly successful in the Asian market and enjoys proven success with its energy savings and customer-friendly electronic features.




ZX Platform Condensing Unit was designed based on three factors demanded by industry users:

Intelligent store solutions – A most innovative approach to enterprise facility management, Copeland’s Intelligent Store architecture integrates hardware and services to provide retailers a single view into their entire network of facilities and understanding what facilities actually cost to operate and maintain. The Intelligent Store architecture transforms data from store equipment and controls into actionable insights. Designed to deliver value in both new and existing stores, Emerson aims to help retailers:

- Make better decisions on resources investment for maximum impact
- Receive accurate feedback and service customized to meet your specific needs
- Reduce operational costs and boost the profitability

Energy efficiency– Utilizing Copeland scroll compressor technology, variable speed fan motor, large capacity condenser coil and advanced control algorithms, energy consumption is significantly reduced. End-users can save more than 20% on annual energy costs compared to using hermetic reciprocating units.

Reliability – Combining the proven reliability of Copeland scroll compressors with advanced electronics controller and diagnostics, equipment reliability is greatly enhanced. Fault code alerts and fault code retrieval capabilities provide information to help improve speed and accuracy of system diagnostics. Integrated electronics provide protection against over-current, overheating, incorrect phase rotation, compressor cycling, high pressure resets and low pressure cut-outs. It can also send out a warning message to the operator when there is liquid floodback, which can prevent critical damage to the unit.

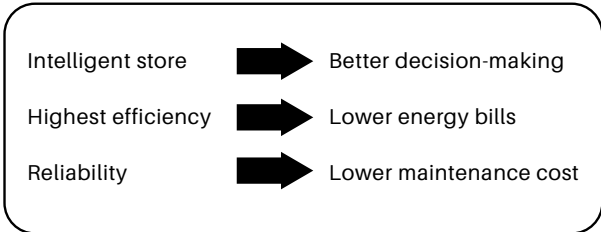

Features and benefits	04
Nomenclature	05
Bill of material	05
Copeland Controller for ZX Platform condensing unit	06
Operating envelopes	07
ZX Family: Medium temperature	07
ZXB Family: Medium temperature	07
ZXD Family: Digital medium temperature	07
ZXL/ZXLD Family: Low temperature	08
Performance data	
ZX Family: Medium temperature - R22	09
ZX Family: Medium temperature - R404A (R507A)	11
ZX Family: Medium temperature - R407F	13
ZXB Family: Medium temperature - R134a	15
ZXD Family: Digital medium temperature - R22	16
ZXD Family: Digital medium temperature - R404A (R507A)	18
ZXD Family: Digital medium temperature - R407F	20
ZXL Family: Low temperature - R22	22
ZXL Family: Low temperature - R404A (R507A)	24
ZXLD Family: Low temperature R404A (R507A)	25
ZXL Family: Low temperature - R404A (R507A)	26
ZXL Family: Low temperature - R407F	27
Technical data	
ZX Family: Medium temperature at 50 Hz - PFJ	29
ZX Family: Medium temperature at 50 Hz - TFD	30
ZX Family: Medium temperature at 60 Hz - PFV/ TF5/TF7	31
ZXB Family: Medium temperature at 50 Hz - TFD	32
ZXD Family: Digital medium temperature at 50 Hz - TFD	33
ZXD Family: Digital medium temperature at 60 Hz - TF5/TF7	34
ZXL Family: Low temperature at 50 Hz - PFJ	35
ZXL Family: Low temperature at 50 Hz - TFD	36
ZXLD Family: Low temperature at 50 Hz - TFD	37
ZXL Family: Low temperature at 60 Hz - PFV/ TF5/TF7	38
Dimensional drawings	39
Packing information	40
Conversion chart	40
Pressure temperature chart at sea level	41
Contact lists	43

ZX Condensing Unit



Figure 1. ZX Platform CDU features

ZX, ZXB and ZXL Family

Proprietary electronic algorithms present advantages for diagnostic, communication and protection. They are also essential to controlling fan speed and in optimizing energy performance for local seasonal ambient temperatures.

ZXD and ZXLD Family

Capacity modulation for precise control of room temperature.

Design features:

- Real time monitoring of compressor operating conditions
- Compressor reverse rotation
- Compressor overcurrent
- Compressor internal motor protector trip
- Discharge gas overheat
- Overvoltage
- Undervoltage
- High pressure cut-out
- Low pressure cut-out (only on MT series)
- Refrigerant floodback
- Compressor minimum off time
- Internal thermal sensor failure
- Intelligent store solution: communication and retail store monitoring

Copeland scroll compressor technology - high efficiency, ultra quiet, high reliability

Features	Owner/Enterprise Benefits
Intelligent store solution	<ul style="list-style-type: none"> • Retail store monitoring • Enhanced energy savings • High-end food safety through real time monitoring
Energy saving	<ul style="list-style-type: none"> • Lower operating costs
Diagnostic protection capabilities	<ul style="list-style-type: none"> • Greatly reduces the chance of nuisance service calls • Extends the life of your equipment • Reduces potential service costs • Keeps equipment operating at their original performance levels to ensure optimum energy efficiency and temperature control • Serves as a guide to what the contractor needs to fix in case of malfunction
Slim profile, lighter weight and optional wall mount capability	<ul style="list-style-type: none"> • Lower installation costs • Enhances the appearance of your enterprise site • Avoids more costly solutions arising from potential location issues
Sound improvement	<ul style="list-style-type: none"> • Creates a more comfortable environment for guests • Beneficial for regions with noise ordinances

Nomenclature

ZX	L	020	B	E	-	TFD	-	451
Unit family	Blank = Medium temp B = R134a Medium temp L = Low temp D = Digital medium temp LD = Digital low temp	2 - 20 HP	Generation	E = Ester oil O = Mineral oil		PFJ = 220V/240V - 1ph - 50 Hz PFV = 208V/230V - 1ph - 60Hz TFD = 380V/420V - 3ph - 50 Hz TF5=200V/230V - 3ph - 60 Hz TF7 = 380 - 3ph - 60 Hz		Bill of material
Base model						Electrical code		Bill of material

Bill of material

CDU Family BOM	ZX 2-7.5HP				ZXB 2-7.5HP		ZXL 2-7.5HP		ZXD 3-7.5HP				ZXD090BE			ZXL090BE		ZXD100HE		ZXL100HE		ZXD120BE		ZXL160BE		ZXL 12-16HP		ZXD/ZXL 20HP	
	401 501	451 551	462	481 581	401	451	451 551	462	451 551	462	481 581	451 551	462	581	451 551	481 581	555	585	555	585	551 521	581	551 521	581	551 521	581	551 521	581	
Liquid Line Filter Dryer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Liquid Line Moisture Indicator	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Liquid Receiver	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Oil Separator		✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Accumulator							✓	✓							✓	✓			✓	✓					✓	✓	✓	✓	
LP Transducer			✓					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
HP Transducer																					✓	✓	✓	✓	✓	✓	✓	✓	
Fixed LP Switch	✓	✓	✓					✓	✓		✓	✓			✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	
Adjustable LP Switch	✓	✓		✓	✓	✓	✓	✓	✓	✓				✓	✓					✓	✓					✓	✓	✓	
Fixed HP Switch	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Copeland Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Digital Modulation								✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Fan Speed Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Intelligent Store Solution Module	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Bluetooth & APP																		✓	✓	✓	✓								
Circuit Breaker	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Sound Jacket	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Low Ambient Kit				✓							✓				✓			✓			✓	✓		✓		✓		✓	
Liquid Injection	✓	✓	✓	✓					✓	✓	✓										✓	✓							
Enhanced Vapor Injection					✓	✓	✓	✓						✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓	✓	
Electronic Oil Level Protective Control																					✓	✓	✓	✓	✓	✓	✓	✓	

Copeland Controller for ZX platform condensing unit


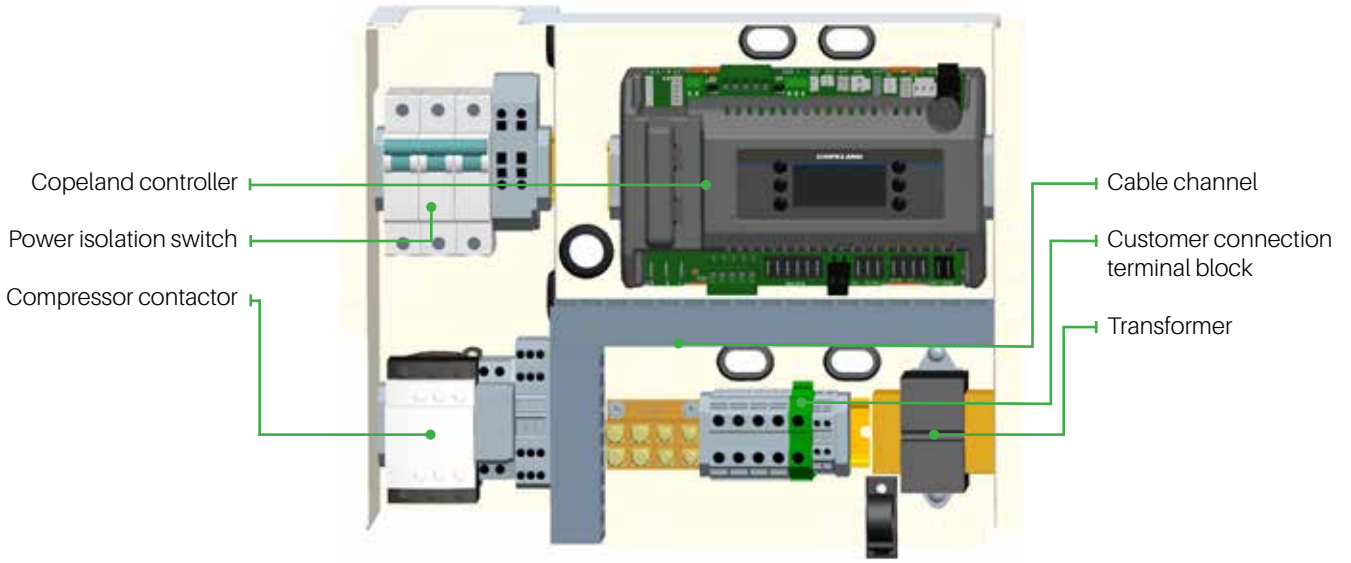


Figure 2. Layout of the control box

Controller layout

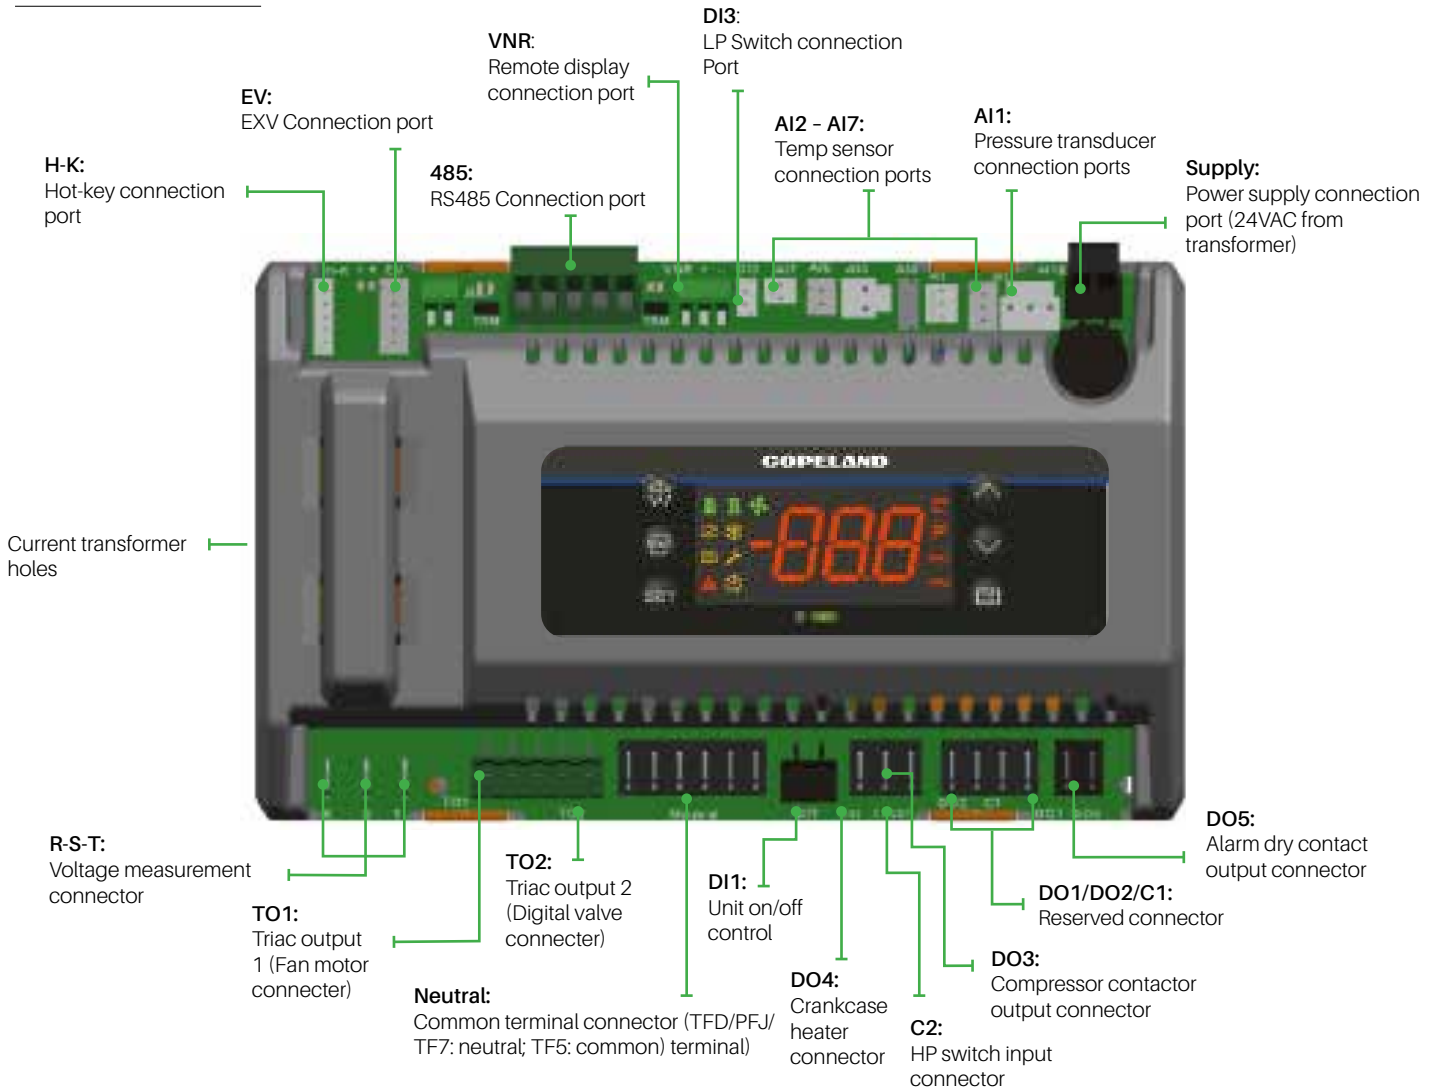


Operating envelopes

ZX Family: Medium temperature


ZX Medium Temperature at 50 Hz - PFJ / TFD

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C

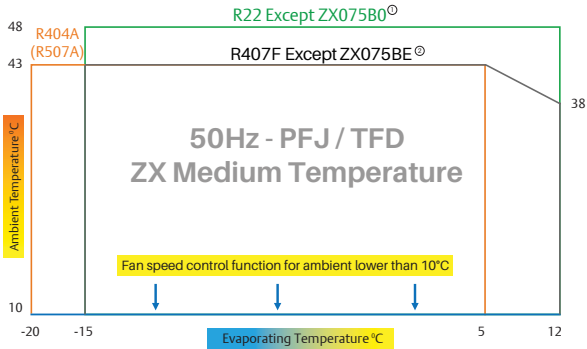

ZX Medium Temperature at 60 Hz - PFV/TF5/TF7

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C

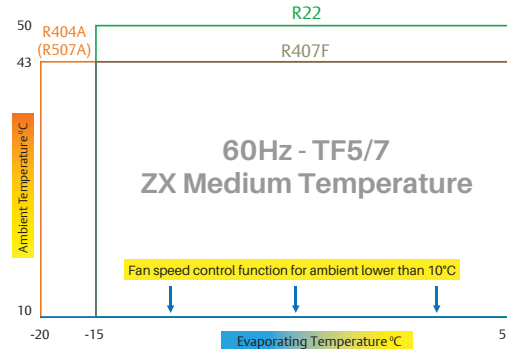


Note⓪: For model ZX075B0 (R22) Max Amb: 43°C, Max Evap: 5°C
Note⓪: For model ZX075BE (R407F) Max Evap: 5°C

ZXB Family: Medium temperature

ZXB Medium Temperature at 50 Hz - TFD


Refrigerant - R134a
Maximum Suction Gas Temperature: 20°C

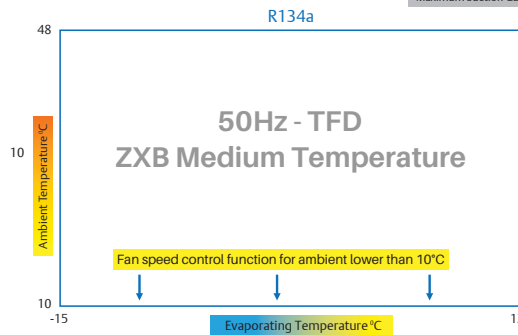

ZXD Family: Digital medium temperature

ZXD Digital Medium Temperature at 50 Hz - TFD
at 60 Hz - TF5/7

Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20°C
(R22 50Hz-TFD is with 10K SH)

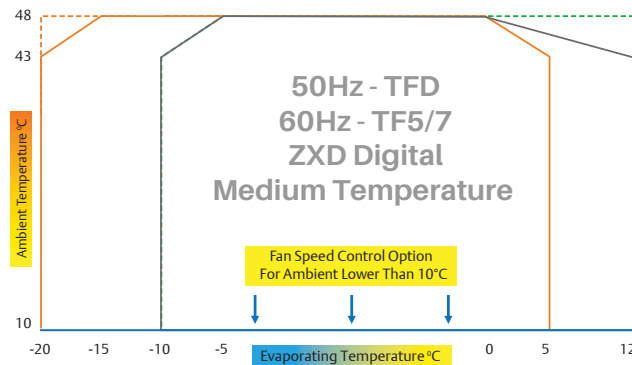


Note: For model ZXD075B0/E Max Amb: 43°C, Max Evap: 5°C


Operating envelopes

ZXL/ZXLD Family: Low temperature


ZXL/ZXLD Low Temperature at 50 Hz - TFD Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20 °C

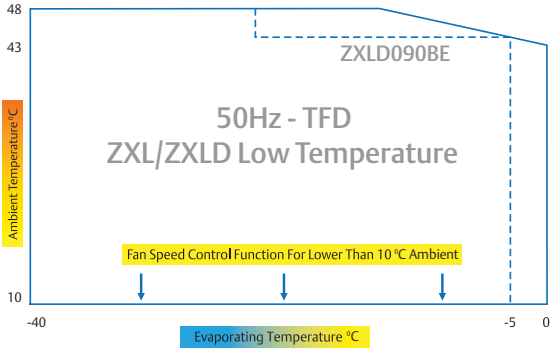

ZXL Low Temperature at 60 Hz - PFV/TF5/TF7 Refrigerant - R404A (R507A), R22, R407F
Maximum Suction Gas Temperature: 20 °C

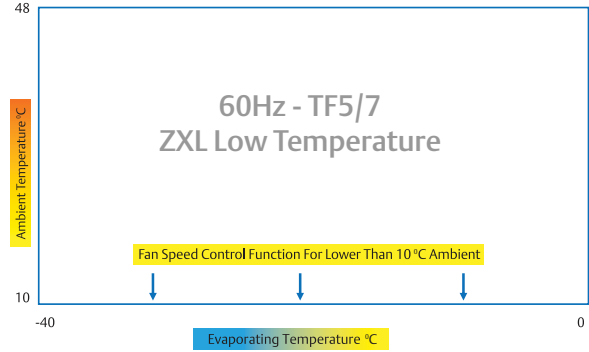

Guideline for using low ambient units

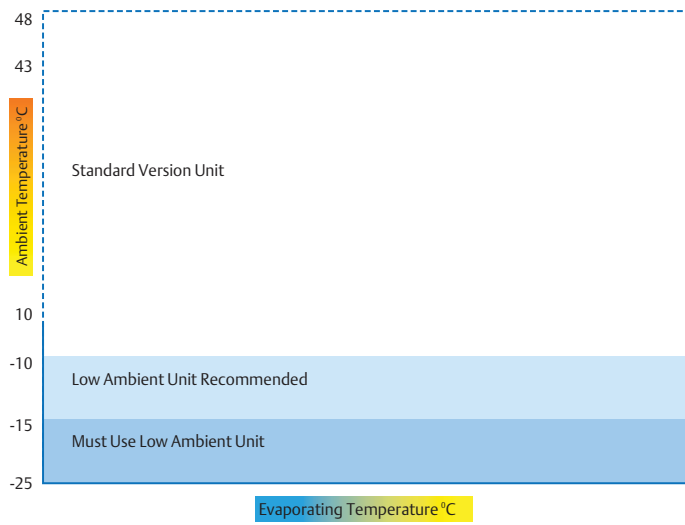

Note: For applications under -25°C ambient temperature, please contact Application Engineering.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX020B0	27	2.84	3.61	4.18	4.95	5.87	7.03	7.45	1.33	1.37	1.41	1.47	1.53	1.70	1.79
	32	2.65	3.33	4.01	4.75	5.61	6.54	6.96	1.45	1.50	1.58	1.64	1.71	1.84	1.88
	38	2.38	3.11	3.81	4.55	5.37	6.19	6.68	1.62	1.74	1.83	1.87	1.91	2.03	2.08
	43	1.93	2.74	3.48	4.23	5.06	5.99	6.33	1.78	1.83	1.95	2.05	2.11	2.20	2.25
	48	1.68	2.30	3.18	3.87	4.69	5.51	5.80	2.21	2.31	2.44	2.51	2.54	2.55	2.64
ZX025B0 ¹	27	3.52	4.17	4.96	5.91	7.07	8.44	9.06	1.43	1.49	1.55	1.66	1.75	1.83	1.95
	32	3.35	4.02	4.79	5.68	6.73	7.96	8.50	1.59	1.64	1.69	1.84	1.90	2.00	2.06
	38	2.92	3.65	4.43	5.29	6.25	7.33	7.81	1.89	1.92	1.96	2.05	2.08	2.17	2.22
	43	2.39	3.20	4.02	4.88	5.79	6.79	7.22	2.10	2.15	2.22	2.29	2.33	2.37	2.45
	48	1.70	2.62	3.51	4.39	5.28	6.22	6.61	2.59	2.65	2.70	2.75	2.80	2.82	2.90
ZX030B0	27	4.30	5.20	6.28	7.57	9.09	10.22	10.80	1.95	2.04	2.17	2.20	2.23	2.43	2.49
	32	4.12	4.90	5.95	7.28	8.69	9.79	10.31	2.10	2.20	2.32	2.34	2.46	2.70	2.77
	38	3.68	4.62	5.65	6.85	8.29	9.06	9.63	2.37	2.48	2.59	2.60	2.76	3.06	3.12
	43	3.27	4.22	5.27	6.50	7.97	8.63	9.08	2.64	2.75	2.84	2.94	3.04	3.32	3.36
	48	2.40	3.55	4.65	5.67	6.86	7.97	8.50	2.98	3.18	3.28	3.35	3.50	3.64	3.69
ZX040B0	27	5.98	7.20	8.57	10.03	11.54	13.82	14.64	2.64	2.71	2.83	2.98	3.08	3.34	3.36
	32	5.46	6.73	8.13	9.62	11.16	13.01	13.85	2.81	2.90	3.06	3.19	3.33	3.68	3.68
	38	4.72	6.01	7.42	8.93	10.48	12.09	13.04	3.08	3.27	3.39	3.49	3.65	4.09	4.07
	43	4.09	5.37	6.78	8.27	9.80	11.61	12.25	3.29	3.52	3.68	3.80	3.95	4.38	4.39
	48	3.55	4.50	6.20	7.57	9.08	10.68	11.23	4.16	4.46	4.49	4.72	4.80	5.07	5.18
ZX050B0 ²	27	7.13	8.76	10.44	12.22	14.12	17.28	18.22	2.88	3.03	3.18	3.29	3.47	4.16	4.28
	32	6.77	8.31	9.96	11.72	13.68	16.62	17.47	3.37	3.35	3.57	3.67	3.97	4.50	4.58
	38	6.24	7.69	9.28	11.06	13.06	15.31	16.34	3.77	3.87	4.07	4.27	4.47	4.98	5.10
	43	5.44	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.27	4.47	4.66	4.96	5.46	5.56
	48	3.96	5.80	7.62	9.49	11.47	13.49	14.40	5.14	5.21	5.44	5.61	5.80	6.01	6.04
ZX060B0 ²	27	8.50	10.41	12.49	14.72	17.66	19.64	20.60	3.51	3.70	3.88	4.16	4.43	4.98	5.32
	32	7.71	9.93	11.71	13.94	16.30	18.87	20.10	3.88	4.07	4.25	4.43	4.71	5.29	5.47
	38	6.81	8.42	10.57	12.85	15.26	17.77	18.92	4.34	4.53	4.71	4.90	5.08	5.86	5.98
	43	5.91	7.23	9.40	11.78	14.26	16.33	17.86	4.90	5.17	5.45	5.64	5.73	6.57	6.66
	48	4.97	7.00	9.25	11.15	13.08	15.09	16.06	6.02	6.22	6.46	6.69	6.96	7.22	7.45
ZX075B0 ²	27	10.03	12.20	14.41	17.23	20.87			4.34	4.54	4.76	4.98	5.22		
	32	9.45	11.24	13.90	16.63	20.21			4.77	4.95	5.19	5.51	5.91		
	38	8.83	10.85	13.25	15.50	19.42			5.36	5.53	5.83	6.25	6.80		
	43	8.18	10.00	12.29	14.30	18.49			5.95	6.10	6.43	6.93	7.62		
ZX076B0 ²	27	10.23	12.44	14.70	17.60	21.29	25.49	27.01	4.25	4.45	4.66	4.88	5.12	5.47	5.64
	32	9.64	11.46	14.18	16.96	20.61	24.03	25.58	4.67	4.85	5.09	5.40	5.79	5.86	5.97
	38	9.01	11.07	13.52	15.80	19.81	22.85	24.65	5.26	5.42	5.72	6.12	6.67	6.64	6.81
	43	8.34	10.20	12.54	14.60	18.86	22.34	23.57	5.83	5.98	6.30	6.79	7.47	7.34	7.48
	48	7.24	8.55	11.46	14.09	17.47	20.55	21.61	6.79	7.04	7.40	7.89	8.43	8.74	8.78

Notes: ¹ Available on PFJ models only

² Available on TFD models only

The rating condition is based on a return gas temperature of 18.3°C.

Power includes condenser fan.

Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)					Power evaporating temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX020B0	27	3.62	4.42	5.36	6.43	7.59	1.69	1.71	1.69	1.69	1.71
	32	3.41	4.22	5.17	6.20	7.29	1.89	1.91	1.90	1.89	1.90
	38	2.88	3.77	4.75	5.78	6.84	2.13	2.17	2.17	2.17	2.18
	43	2.20	3.19	4.24	5.31	6.38	2.35	2.41	2.42	2.43	2.45
	48	1.30	2.43	3.58	4.73	5.84	2.59	2.67	2.71	2.73	2.75
	50	0.88	2.07	3.27	4.46	5.60	2.69	2.78	2.83	2.85	2.89
ZX030B0	27	5.12	6.20	7.29	8.90	10.54	2.42	2.53	2.69	2.73	2.77
	32	4.91	5.84	6.98	8.48	10.00	2.60	2.73	2.88	2.90	3.05
	38	4.39	5.51	6.53	7.96	9.38	2.94	3.08	3.21	3.22	3.42
	43	3.90	5.03	5.94	7.35	8.74	3.27	3.41	3.52	3.65	3.77
	48	2.86	4.23	5.01	6.45	7.86	3.70	3.94	4.07	4.15	4.34
	50	2.45	3.12	4.51	5.98	7.40	3.86	4.16	4.29	4.36	4.57
ZX040B0	27	7.36	8.83	10.52	12.37	14.31	3.25	3.35	3.52	3.75	4.02
	32	7.06	8.54	10.21	12.02	13.92	3.55	3.63	3.79	4.01	4.28
	38	6.37	7.87	9.55	11.34	13.20	4.05	4.11	4.26	4.48	4.75
	43	5.62	7.16	8.86	10.66	12.50	4.55	4.60	4.73	4.95	5.22
	48	4.82	6.41	8.14	9.96	11.81	5.09	5.12	5.25	5.46	5.74
	50	4.50	6.12	7.87	9.70	11.55	5.30	5.33	5.46	5.67	5.95
ZX050B0	27	8.55	10.51	12.53	14.66	16.95	3.54	3.72	3.91	4.05	4.27
	32	8.12	9.97	11.95	14.06	16.42	4.15	4.13	4.39	4.52	4.88
	38	7.49	9.23	11.14	13.28	15.68	4.64	4.76	5.00	5.25	5.49
	43	6.53	8.16	10.03	12.18	14.65	5.25	5.25	5.49	5.74	6.10
	48	4.75	6.96	9.14	11.39	13.76	6.33	6.40	6.69	6.90	7.13
	50	4.04	6.48	8.79	11.07	13.41	6.76	6.87	7.16	7.37	7.55
ZX060B0	27	10.20	12.49	14.99	17.66	21.19	4.39	4.62	4.85	5.20	5.54
	32	9.25	11.92	14.05	16.73	19.56	4.85	5.08	5.31	5.54	5.89
	38	8.17	10.10	12.68	15.42	18.31	5.43	5.66	5.89	6.12	6.35
	43	7.09	8.68	11.28	14.14	17.11	6.12	6.47	6.81	7.04	7.16
	48	5.96	8.40	11.10	13.38	15.70	7.53	7.77	8.07	8.37	8.70
	50	5.51	8.29	11.03	13.08	15.13	8.09	8.16	8.44	8.75	9.00
ZX075B0	27	11.25	14.06	16.61	19.89	24.05	5.10	5.34	5.59	5.86	6.14
	32	10.60	12.95	16.02	19.16	23.29	5.60	5.82	6.11	6.48	6.95
	38	9.91	12.51	15.28	17.85	22.38	6.31	6.51	6.86	7.35	8.00
	43	9.18	11.53	14.17	16.50	21.31	7.00	7.17	7.56	8.15	8.96
	48	7.96	9.66	12.95	15.92	19.74	8.15	8.45	8.88	9.47	10.12
	50	7.48	8.92	12.46	15.69	19.11	8.61	8.96	9.41	10.00	10.58

Notes: The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020BE	27	3.30	3.90	4.44	5.08	5.79	6.60	1.64	1.67	1.70	1.76	1.84	1.96
	32	2.85	3.39	3.92	4.48	5.08	5.76	1.79	1.81	1.84	1.90	2.00	2.12
	38	2.42	2.90	3.36	3.85	4.36	4.94	1.95	1.99	2.02	2.07	2.16	2.26
	43	1.94	2.43	2.89	3.34	3.81	4.30	2.14	2.18	2.22	2.27	2.34	2.41
ZX025BE ¹	27	3.22	3.95	4.67	5.45	6.37	7.50	1.71	1.76	1.79	1.84	1.90	1.96
	32	2.96	3.68	4.36	5.09	5.95	7.00	1.93	1.96	2.00	2.04	2.08	2.13
	38	2.61	3.31	3.96	4.64	5.41	6.37	2.19	2.23	2.26	2.29	2.32	2.35
	43	1.96	2.64	3.26	3.89	4.61	5.48	2.59	2.65	2.69	2.71	2.73	2.76
ZX030BE	27	4.04	4.87	5.81	6.85	7.99	9.23	2.14	2.19	2.24	2.32	2.42	2.55
	32	3.75	4.52	5.39	6.35	7.40	8.55	2.40	2.44	2.50	2.57	2.67	2.81
	38	3.39	4.08	4.85	5.72	6.67	7.69	2.72	2.75	2.80	2.88	3.00	3.15
	43	3.06	3.69	4.39	5.17	6.03	6.97	3.06	3.09	3.14	3.21	3.33	3.50
ZX040BE	27	5.52	6.57	7.70	8.95	10.37	12.02	2.72	2.86	3.02	3.17	3.31	3.36
	32	5.10	6.10	7.13	8.24	9.47	10.87	3.03	3.15	3.31	3.46	3.54	3.68
	38	4.61	5.60	6.57	7.57	8.64	9.85	3.45	3.58	3.71	3.85	3.97	4.03
	43	3.98	5.00	5.95	6.89	7.83	8.85	3.87	4.00	4.12	4.23	4.33	4.38
ZX050BE ²	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
ZX060BE ²	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.53	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
ZX075BE ²	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZX076BE ²	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07

Notes: ¹ Available on PFJ models only
² Available on TFD models only
The rating condition is based on a return gas temperature of 18.3°C.
Power includes condenser fan.
Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020BE	27	3.50	4.26	4.98	5.77	6.71	7.89	1.84	1.87	1.90	1.95	2.00	2.05
	32	3.15	3.94	4.66	5.40	6.25	7.30	2.09	2.10	2.12	2.16	2.20	2.24
	38	2.69	3.52	4.24	4.93	5.69	6.60	2.42	2.42	2.44	2.47	2.50	2.54
	43	2.22	3.09	3.82	4.48	5.17	5.97	2.71	2.71	2.73	2.76	2.81	2.85
ZX030BE	27	5.02	5.98	7.05	8.17	9.29	10.36	2.69	2.80	2.92	3.05	3.17	3.29
	32	4.62	5.56	6.63	7.75	8.88	9.97	2.98	3.06	3.16	3.26	3.36	3.45
	38	4.14	5.02	6.02	7.10	8.18	9.23	3.38	3.46	3.55	3.65	3.75	3.85
	43	3.78	4.56	5.47	6.46	7.47	8.44	3.74	3.84	3.95	4.08	4.21	4.33
ZX040BE	27	6.71	8.02	9.60	11.30	13.00	14.59	3.72	3.79	3.89	3.99	4.10	4.18
	32	6.46	7.70	9.20	10.81	12.42	13.90	3.84	3.92	4.02	4.14	4.26	4.35
	38	5.90	7.05	8.45	9.95	11.43	12.76	4.32	4.40	4.50	4.62	4.74	4.84
	43	5.36	6.43	7.73	9.12	10.49	11.69	4.89	4.95	5.05	5.16	5.27	5.37
ZX050BE	27	8.10	9.70	11.55	13.54	15.53	17.38	4.42	4.63	4.86	5.11	5.35	5.57
	32	8.05	9.56	11.33	13.21	15.09	16.83	4.59	4.78	4.99	5.22	5.45	5.66
	38	7.46	8.86	10.50	12.25	13.99	15.58	5.10	5.27	5.48	5.70	5.93	6.13
	43	6.81	8.10	9.63	11.26	12.88	14.33	5.62	5.80	6.01	6.24	6.47	6.69
ZX060BE ¹	27	9.84	11.77	13.96	16.31	18.74	21.15	5.06	5.24	5.49	5.76	6.01	6.20
	32	9.25	11.09	13.16	15.36	17.60	19.79	5.39	5.58	5.82	6.09	6.35	6.55
	38	8.30	10.09	12.06	14.13	16.19	18.16	6.09	6.25	6.48	6.74	6.99	7.19
	43	7.32	9.11	11.04	13.03	14.98	16.82	6.82	6.96	7.17	7.41	7.65	7.83
ZX075BE ¹	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19

Notes: ¹Available on TF5/TF7 models only

The rating condition is based on a return gas temperature of 18.3°C.

Power includes condenser fan.

Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX020BE	27	3.63	4.32	5.07	5.79	6.45	7.24	7.62	1.55	1.67	1.76	1.87	1.99	2.06	2.14
	32	3.36	3.98	4.69	5.39	6.07	6.90	7.30	1.77	1.85	1.93	2.05	2.22	2.35	2.46
	38	2.79	3.35	4.02	4.74	5.46	6.35	6.78	2.11	2.18	2.27	2.44	2.70	2.92	3.06
	43	2.21	2.74	3.40	4.14	4.91			2.40	2.48	2.61	2.84	3.20		
ZX025BE ¹	27	3.91	4.83	5.80	6.82	7.91	9.05	9.53	1.72	1.85	1.92	1.96	2.00	2.09	2.14
	32	3.63	4.45	5.35	6.35	7.44	8.63	9.13	1.97	2.05	2.10	2.15	2.23	2.38	2.46
	38	3.01	3.74	4.59	5.58	6.69	7.94	8.48	2.35	2.41	2.47	2.56	2.71	2.96	3.09
	43	2.39	3.06	3.88	4.87	6.03			2.67	2.74	2.83	2.98	3.22		
ZX030BE	27	5.01	6.13	7.30	8.53	9.88	11.32	11.91	2.20	2.39	2.47	2.58	2.64	2.78	2.85
	32	4.64	5.65	6.75	7.94	9.31	10.79	11.41	2.44	2.63	2.67	2.77	2.97	3.16	3.27
	38	3.85	4.75	5.79	6.97	8.37	9.93	10.60	2.86	3.00	3.11	3.23	3.57	3.90	4.07
	43	3.06	3.88	4.89	6.09	7.53			3.11	3.28	3.43	3.49	4.03		
ZX040BE	27	6.81	8.21	9.64	11.09	12.65	14.37	15.13	2.87	3.18	3.26	3.38	3.41	3.57	3.66
	32	6.31	7.57	8.91	10.33	11.91	13.70	14.49	3.18	3.49	3.53	3.64	3.84	4.06	4.20
	38	5.24	6.36	7.64	9.07	10.71	12.61	13.46	3.72	3.98	4.10	4.24	4.61	5.01	5.23
	43	4.16	5.20	6.46	7.92	9.64			4.04	4.36	4.53	4.59	5.21		
ZX050BE ²	27	8.11	10.02	11.73	13.53	15.71	18.56	19.95	3.62	3.70	3.92	4.20	4.46	4.62	4.64
	32	7.42	9.44	11.19	12.96	15.04	17.74	19.05	4.07	4.16	4.39	4.69	4.96	5.14	5.16
	38	6.32	8.44	10.22	11.95	13.91	16.41	17.61	4.61	4.71	4.95	5.26	5.54	5.73	5.76
	43	5.32	7.53	9.33	11.01	12.87			5.12	5.22	5.46	5.77	6.06		
ZX060BE ²	27	9.24	11.22	13.02	15.16	18.23	21.53	23.15	3.93	3.87	4.07	4.36	4.79	4.96	4.98
	32	8.46	10.57	12.42	14.51	17.45	20.57	22.09	4.50	4.48	4.62	5.00	5.38	5.57	5.60
	38	7.20	9.45	11.35	13.38	16.14	19.03	20.43	5.05	5.02	5.19	5.50	6.07	6.27	6.30
	43	6.07	8.44	10.36	12.33	14.93			5.56	5.51	5.66	5.98	6.44		
ZX075BE ²	27	10.07	12.23	14.19	16.52	19.68			4.32	4.22	4.39	4.65	5.08		
	32	9.23	11.52	13.53	15.82	18.85			4.92	4.89	5.04	5.47	5.81		
	38	7.85	10.31	12.37	14.59	17.43			5.68	5.64	5.80	6.16	6.74		
	43	6.62	9.20	11.29	13.45	16.12			6.38	6.29	6.46	6.81	7.28		
ZX076BE ²	27	10.28	12.48	14.48	16.85	20.08	23.72	25.50	4.44	4.31	4.43	4.64	5.08	5.26	5.28
	32	9.41	11.75	13.80	16.14	19.23	22.66	24.34	5.03	5.01	5.14	5.60	5.93	6.14	6.16
	38	8.01	10.51	12.62	14.88	17.78	20.96	22.51	5.97	5.94	6.07	6.44	7.08	7.34	7.38
	43	6.75	9.38	11.52	13.71	16.44			6.84	6.72	6.90	7.26	7.76		

Notes: ¹ Available on PFJ models only
² Available on TFD models only
 The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - PFV/TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)					Power evaporating temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX020BE	27	4.51	5.36	6.27	7.14	7.92	2.01	2.11	2.20	2.28	2.41
	32	4.17	4.93	5.78	6.63	7.44	2.29	2.33	2.41	2.50	2.68
	38	3.45	4.13	4.95	5.81	6.68	2.73	2.74	2.83	2.97	3.25
	43	2.73	3.37	4.18	5.07	6.00	3.10	3.11	3.24	3.45	3.85
ZX030BE	27	6.23	7.60	9.03	10.51	12.14	2.86	3.02	3.08	3.15	3.19
	32	5.76	6.99	8.32	9.77	11.41	3.17	3.31	3.33	3.38	3.58
	38	4.77	5.86	7.13	8.56	10.24	3.70	3.76	3.87	3.93	4.30
	43	3.78	4.78	6.01	7.46	9.20	4.01	4.11	4.26	4.24	4.84
ZX040BE	27	8.47	10.18	11.91	13.66	15.54	3.72	4.01	4.07	4.13	4.12
	32	7.83	9.36	10.99	12.70	14.60	4.12	4.39	4.39	4.43	4.63
	38	6.49	7.85	9.41	11.13	13.11	4.82	5.00	5.10	5.16	5.56
	43	5.14	6.41	7.94	9.70	11.78	5.22	5.46	5.62	5.57	6.26
ZX050BE	27	10.08	12.42	14.50	16.67	19.30	4.71	4.67	4.89	5.13	5.40
	32	9.21	11.68	13.80	15.94	18.45	5.27	5.23	5.47	5.71	5.99
	38	7.82	10.42	12.58	14.67	17.03	5.97	5.91	6.16	6.39	6.68
	43	6.58	9.28	11.47	13.49	15.71	6.61	6.54	6.77	7.00	7.28
ZX060BE ¹	27	11.49	13.91	16.09	18.68	22.39	5.11	4.88	5.08	5.32	5.80
	32	10.50	13.08	15.31	17.85	21.40	5.83	5.63	5.76	6.09	6.49
	38	8.92	11.67	13.97	16.43	19.75	6.54	6.31	6.45	6.69	7.31
	43	7.50	10.40	12.73	15.11	18.23	7.17	6.91	7.03	7.26	7.75
ZX075BE ¹	27	12.53	15.16	17.54	20.36	24.18	5.61	5.32	5.48	5.68	6.14
	32	11.45	14.25	16.69	19.45	23.11	6.38	6.16	6.28	6.67	7.01
	38	9.72	12.72	15.23	17.91	21.33	7.35	7.09	7.21	7.49	8.12
	43	8.18	11.33	13.87	16.47	19.69	8.23	7.89	8.02	8.27	8.75

Notes: ¹Available on TF5/TF7 models only
 The rating condition is based on a return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)							Power evaporating temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZXB015BE	27	2.42	2.92	3.48	4.11	4.83	5.65	6.01	1.10	1.08	1.09	1.11	1.14	1.16	1.16
	32	2.37	2.87	3.42	4.03	4.72	5.52	5.86	1.20	1.18	1.18	1.21	1.25	1.28	1.29
	38	2.26	2.76	3.30	3.89	4.56	5.31	5.64	1.34	1.32	1.33	1.36	1.41	1.46	1.47
	43	2.14	2.64	3.18	3.76	4.40	5.13	5.44	1.49	1.47	1.48	1.52	1.58	1.64	1.66
	48	2.01	2.52	3.05	3.61	4.24	4.94	5.24	1.67	1.64	1.66	1.71	1.77	1.84	1.87
ZXB020BE	27	2.74	3.41	4.14	4.94	5.78	6.67	7.03	1.08	1.07	1.10	1.14	1.19	1.23	1.25
	32	2.63	3.29	4.01	4.80	5.63	6.51	6.87	1.21	1.20	1.23	1.27	1.33	1.38	1.40
	38	2.47	3.12	3.84	4.61	5.43	6.29	6.64	1.38	1.38	1.41	1.46	1.52	1.58	1.60
	43	2.36	2.99	3.70	4.45	5.26	6.10	6.44	1.53	1.53	1.57	1.62	1.69	1.75	1.78
	48	2.27	2.90	3.58	4.32	5.10	5.92	6.25	1.69	1.69	1.73	1.78	1.85	1.93	1.95
ZXB025BE	27	2.98	3.70	4.46	5.28	6.19	7.20	7.63	1.25	1.28	1.34	1.42	1.52	1.62	1.66
	32	2.89	3.59	4.33	5.14	6.02	7.00	7.43	1.37	1.41	1.48	1.56	1.66	1.75	1.79
	38	2.79	3.47	4.18	4.95	5.80	6.75	7.16	1.53	1.59	1.67	1.76	1.86	1.96	1.99
	43	2.72	3.37	4.05	4.79	5.61	6.52	6.91	1.67	1.75	1.85	1.96	2.07	2.17	2.20
	48	2.65	3.27	3.92	4.62	5.40	6.27	6.65	1.83	1.94	2.06	2.18	2.30	2.41	2.44
ZXB030BE	27	3.74	4.53	5.45	6.49	7.66	8.95	9.49	1.50	1.54	1.62	1.73	1.83	1.93	1.96
	32	3.59	4.39	5.29	6.30	7.43	8.66	9.18	1.65	1.69	1.77	1.89	2.02	2.16	2.21
	38	3.43	4.22	5.10	6.08	7.15	8.31	8.80	1.85	1.87	1.96	2.09	2.25	2.43	2.50
	43	3.29	4.07	4.94	5.88	6.90	8.01	8.47	2.05	2.05	2.14	2.28	2.46	2.67	2.75
	48	3.14	3.91	4.75	5.66	6.64	7.67	8.11	2.30	2.29	2.36	2.51	2.70	2.94	3.03
ZXB035BE	27	5.09	6.04	7.16	8.40	9.73	11.13	11.70	1.88	2.06	2.21	2.35	2.52	2.75	2.87
	32	4.93	5.88	6.97	8.17	9.46	10.81	11.35	2.02	2.23	2.40	2.56	2.75	3.00	3.13
	38	4.76	5.67	6.72	7.88	9.11	10.37	10.88	2.22	2.45	2.65	2.84	3.05	3.32	3.46
	43	4.61	5.50	6.51	7.61	8.78	9.97	10.45	2.42	2.69	2.90	3.11	3.34	3.64	3.78
	48	4.47	5.32	6.28	7.32	8.41	9.53	9.97	2.71	2.99	3.23	3.46	3.71	4.03	4.18
ZXB040BE	27	5.48	6.65	7.93	9.34	10.88	12.55	13.26	2.19	2.22	2.33	2.49	2.70	2.95	3.05
	32	5.30	6.43	7.68	9.05	10.54	12.18	12.87	2.32	2.38	2.51	2.68	2.90	3.15	3.26
	38	5.11	6.18	7.38	8.69	10.13	11.71	12.38	2.53	2.62	2.77	2.95	3.17	3.42	3.52
	43	4.94	5.97	7.11	8.37	9.77	11.30	11.95	2.80	2.91	3.06	3.25	3.47	3.70	3.80
	48	4.76	5.73	6.82	8.03	9.36	10.84	11.47	3.18	3.31	3.47	3.66	3.87	4.09	4.18
ZXB050BE	27	6.23	7.53	9.10	10.95	13.06	15.47	16.51	2.45	2.52	2.66	2.84	3.05	3.28	3.37
	32	6.21	7.52	9.07	10.86	12.90	15.19	16.18	2.72	2.83	2.99	3.19	3.42	3.65	3.74
	38	6.17	7.45	8.93	10.63	12.54	14.67	15.59	3.07	3.21	3.41	3.63	3.87	4.10	4.19
	43	6.01	7.24	8.65	10.23	12.01	13.98	14.82	3.34	3.52	3.73	3.98	4.22	4.46	4.55
	48	5.65	6.80	8.10	9.56	11.18	12.96	13.72	3.57	3.78	4.02	4.28	4.54	4.78	4.86
ZXB060BE	27	7.34	8.70	10.14	11.76	13.65	15.91	16.94	2.92	3.13	3.38	3.63	3.89	4.14	4.24
	32	7.12	8.46	9.86	11.42	13.23	15.41	16.40	3.12	3.35	3.61	3.89	4.19	4.49	4.61
	38	6.87	8.16	9.49	10.97	12.69	14.75	15.69	3.43	3.66	3.93	4.23	4.56	4.90	5.05
	43	6.69	7.94	9.21	10.61	12.24	14.19	15.09	3.76	3.98	4.25	4.56	4.90	5.28	5.43
	48	6.59	7.78	8.98	10.30	11.83	13.67	14.51	4.20	4.39	4.65	4.96	5.32	5.71	5.87

Notes: The rating condition is based on the return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030B0	27	5.32	6.09	7.21	8.70	10.63	11.53	1.76	1.93	2.05	2.09	1.99	1.90
	32	4.90	5.84	6.94	8.24	9.80	10.50	2.02	2.11	2.21	2.28	2.27	2.24
	38	4.34	5.64	6.88	8.12	9.40	9.93	2.31	2.27	2.31	2.39	2.48	2.50
	43	3.18	4.91	6.41	7.72	8.90	9.34	2.74	2.57	2.55	2.62	2.75	2.81
	48		3.08						3.25				
ZXD040B0	27	7.73	9.28	10.88	12.42	14.67	15.18	2.66	2.77	2.92	3.02	3.30	3.38
	32	7.29	8.91	10.61	12.33	14.29	14.98	2.84	3.00	3.12	3.26	3.60	3.70
	38	6.39	7.95	9.68	11.44	13.22	14.14	3.20	3.32	3.42	3.57	4.01	4.10
	43	5.71	7.27	8.97	10.70	12.69	13.29	3.44	3.60	3.72	3.86	4.29	4.40
	48		6.55	8.06	9.76	11.56	12.17		4.40	4.62	4.70	4.96	5.07
ZXD050B0	27	8.76	10.44	12.22	14.12	17.28	18.22	3.03	3.18	3.29	3.47	3.95	4.10
	32	8.31	9.96	11.72	13.68	16.62	17.47	3.35	3.57	3.67	3.97	4.50	4.58
	38	7.69	9.28	11.06	13.06	15.31	16.34	3.87	4.07	4.27	4.47	4.98	5.10
	43	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.47	4.66	4.96	5.46	5.56
	48		7.62	9.49	11.47	13.49	14.40		5.44	5.61	5.80	6.01	6.04
ZXD060B0	27	10.41	12.49	14.72	17.66	19.64	20.60	3.70	3.88	4.16	4.50	4.70	4.81
	32	9.93	11.71	13.94	16.30	18.87	20.10	4.07	4.25	4.43	4.75	5.29	5.47
	38	8.90	10.57	12.85	15.26	17.77	18.92	4.53	4.71	4.90	5.23	5.86	5.98
	43	7.60	9.40	11.78	14.26	16.33	17.86	5.17	5.45	5.64	6.10	6.57	6.66
	48		9.25	11.15	13.08	15.09	16.06		6.46	6.69	6.96	7.22	7.30
ZXD075B0	27	12.37	14.91	17.73	20.87			4.54	4.76	4.98	5.22		
	32	11.24	13.90	16.96	20.21			4.95	5.19	5.51	5.91		
	38	10.85	13.25	16.08	19.42			5.53	5.83	6.25	6.80		
	43		12.29	15.09	18.49				6.43	6.93	7.62		
ZXD076B0	27	12.62	15.21	18.08	21.29	24.47	25.93	4.45	4.66	4.88	5.12	5.47	5.64
	32	11.46	14.18	16.96	20.61	23.07	24.56	4.85	5.09	5.40	5.79	5.86	5.97
	38	11.07	13.52	15.80	19.81	21.94	23.66	5.42	5.72	6.12	6.67	6.64	6.81
	43	10.20	12.54	14.60	18.86	21.45	22.63	5.98	6.30	6.79	7.47	7.34	7.48
	48		11.46	14.09	17.47	19.73	20.75		7.40	7.89	8.43	8.74	8.78

Notes: The rating condition is based on suction superheat of 10K.
 ZXD030B0 rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38oC and 43oC are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030B0 ¹	27	6.18	7.27	8.44	9.77	11.34	12.05	2.21	2.31	2.46	2.72	3.12	3.32
	32	5.93	7.07	8.23	9.49	10.94	11.58	2.48	2.60	2.76	2.99	3.32	3.49
	38	5.45	6.67	7.86	9.08	10.42	11.00	2.72	2.90	3.07	3.27	3.54	3.68
	43	4.80	6.14	7.38	8.60	9.87		2.92	3.14	3.33	3.52	3.75	
	48		5.35						3.43				
ZXD040B0	27	8.03	9.77	11.63	13.35	15.08		3.09	3.20	3.37	3.60	3.90	
	32	7.62	9.29	11.09	12.74	14.38		3.39	3.50	3.68	3.92	4.24	
	38	6.97	8.27	9.89	11.97	13.66		3.80	3.92	4.11	4.37	4.71	
	43	6.47	7.78	9.33	11.31	13.03		4.20	4.32	4.52	4.79	5.16	
	48		7.43	8.94	10.51	12.23			4.77	4.98	5.27	5.66	
ZXD050B0	27	10.30	12.52	14.91	17.12	19.33		3.97	4.11	4.32	4.61	5.00	
	32	9.77	11.91	14.21	16.33	18.44		4.35	4.49	4.72	5.02	5.44	
	38	8.94	10.60	12.68	15.35	17.51		4.88	5.03	5.27	5.60	6.04	
	43	8.29	9.98	11.97	14.50	16.71		5.38	5.54	5.79	6.14	6.61	
	48		9.53	11.46	13.48	15.68			6.12	6.38	6.76	7.25	
ZXD060B0	27	12.15	14.77	17.60	20.20	22.81		4.72	4.89	5.14	5.49	5.95	
	32	11.53	14.06	16.77	19.27	21.76		5.17	5.35	5.61	5.98	6.47	
	38	10.54	12.51	14.96	18.11	20.66		5.80	5.99	6.27	6.66	7.18	
	43	9.78	11.78	14.12	17.11	19.72		6.41	6.60	6.89	7.31	7.87	
	48	NA	11.24	13.52	15.90	18.50		NA	7.28	7.60	8.04	8.63	
ZXD075B0	27	13.29	16.15	19.24	22.08	24.94		5.23	5.42	5.70	6.09	6.60	
	32	12.61	15.37	18.34	21.06	23.79		5.74	5.93	6.22	6.63	7.18	
	38	11.53	13.67	16.36	19.80	22.59		6.44	6.64	6.95	7.39	7.97	
	43	10.70	12.87	15.44	18.70	21.55		7.10	7.32	7.64	8.11	8.73	
	48	NA	12.29	14.78	17.38	20.23		NA	8.08	8.43	8.92	9.57	

Notes: ¹ Available on TF7 models only.
 The rating condition is based on suction superheat of 10K.
 ZXD030B0 rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-15	-5	0	5
ZXD030BE	27	3.95	4.65	5.56	6.65	7.90	9.28	1.92	2.14	2.24	2.26	2.26	2.29
	32	3.72	4.37	5.20	6.18	7.28	8.47	2.01	2.22	2.33	2.38	2.43	2.53
	38	3.32	3.94	4.69	5.55	6.48	7.45	2.27	2.46	2.56	2.63	2.73	2.90
	43	2.98	3.59	4.29	5.06	5.86	6.67	2.53	2.69	2.78	2.85	2.97	3.19
	48		3.34	4.00	4.70	5.39			2.86	2.92	2.99	3.13	
ZXD040BE	27	5.92	7.11	8.35	9.64	11.01	12.46	2.70	2.85	3.02	3.21	3.43	3.68
	32	5.53	6.69	7.87	9.11	10.40	11.75	2.99	3.12	3.27	3.44	3.64	3.87
	38	4.90	6.00	7.12	8.27	9.45	10.68	3.49	3.59	3.72	3.87	4.04	4.24
	43	4.23	5.28	6.33	7.40	8.48	9.59	4.02	4.10	4.21	4.34	4.50	4.68
	48	3.56	4.56	5.54	6.53	7.51		4.55	4.61	4.70	4.81	4.96	
ZXD050BE	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
	48	4.20	5.49	6.91	8.42	9.98		5.63	5.67	5.75	5.85	6.01	
ZXD060BE	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.58	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
	48	5.06	6.71	8.31	9.93	11.66		6.26	6.32	6.46	6.64	6.83	
ZXD075BE	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZXD076BE	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07
	48	5.32	7.26	8.77	10.50	12.34		6.79	6.88	7.02	7.21	7.43	
ZXD090BE	27	10.75	12.44	14.22	16.11	18.08	20.16	4.87	5.19	5.53	5.87	6.22	6.56
	32	10.40	12.08	13.85	15.73	17.70	19.75	5.31	5.67	6.04	6.43	6.82	7.23
	38	9.82	11.40	13.09	14.86	16.71	18.63	5.93	6.34	6.77	7.23	7.71	8.21
	43	8.98	10.42	11.97	13.60	15.32	17.10	6.58	7.05	7.54	8.07	8.62	9.19
	48	7.69	8.98	10.38	11.86	13.40		7.39	7.91	8.47	9.06	9.69	
ZXD100HE	27	13.02	15.47	18.24	21.29	24.56	28.01	5.63	5.96	6.35	6.81	7.36	8.01
	32	12.24	14.56	17.14	19.94	22.90	25.98	6.26	6.61	6.98	7.40	7.88	8.42
	38	11.44	13.61	15.96	18.46	21.04	23.66	7.13	7.51	7.88	8.25	8.63	9.05
	43	10.98	13.03	15.19	17.43	19.70	21.95	7.98	8.38	8.74	9.07	9.39	9.70
	48	10.82	12.73	14.71	16.70	18.65		8.94	9.36	9.72	10.02	10.27	
ZXD120BE	27	15.94	19.72	23.35	26.67	30.50		8.22	8.49	8.96	9.61	10.40	
	32	14.82	18.47	22.12	25.63	29.07		8.97	9.25	9.69	10.27	10.97	
	38	13.37	16.84	20.50	24.22	27.85		9.96	10.25	10.67	11.20	11.81	
	43	11.74	15.04	18.70	22.57	26.52		10.86	11.19	11.61	12.11	12.66	
	48	9.41	12.54	16.18	20.19	24.45		11.85	12.22	12.66	13.15	13.65	
ZXD160BE	27	21.54	24.95	28.49	32.10	35.71		10.45	10.86	11.27	11.69	12.13	
	32	20.35	23.84	27.53	31.33	35.18		11.45	11.89	12.33	12.78	13.26	
	38	19.48	22.99	26.75	30.68	34.73		12.49	12.99	13.48	13.99	14.53	
	43	18.51	22.15	25.88	29.84	33.97		13.41	13.96	14.52	15.09	15.69	
	48	17.21	20.71	24.34	28.26	32.39		14.52	15.15	15.78	16.43	17.11	
ZXD200BE	27	25.15	30.38	35.68	41.14			13.40	13.71	14.08	15.00		
	32	23.59	29.01	34.48	40.12			15.78	15.89	15.96	16.37		
	38	22.20	27.27	32.79	38.45			18.26	18.56	18.77	18.90		
	43	21.26	26.12	31.53	37.07			20.01	20.59	20.78	20.93		
	48	20.76	25.6	30.76	36.06			21.26	21.86	22.02	22.24		

Notes: The rating condition is based on return gas temperature of 18.3°C.
 The rating condition is based on suction superheat of 10 K.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD030BE ¹	27	4.70	5.68	6.71	7.80	8.94	10.14	2.29	2.46	2.63	2.79	2.95	3.10
	32	4.43	5.36	6.33	7.34	8.37	9.45	2.48	2.66	2.84	3.01	3.18	3.35
	38	4.03	4.89	5.77	6.67	7.58	8.50	2.73	2.92	3.10	3.29	3.48	3.67
	43	3.67	4.47	5.27	6.07	6.86	7.65	2.96	3.15	3.34	3.54	3.75	3.95
	48		4.07	4.78	5.48	6.15			3.40	3.59	3.80	4.02	
ZXD040BE	27	7.10	8.53	9.35	10.80	12.99	14.70	3.24	3.42	3.62	3.85	4.05	4.34
	32	6.64	8.03	8.70	10.20	12.27	13.87	3.59	3.74	4.00	4.13	4.30	4.57
	38	5.88	7.20	7.97	9.26	11.15	12.60	4.19	4.31	4.46	4.64	4.77	5.00
	43	5.21	6.34	7.09	8.29	10.01	11.32	4.82	4.92	5.05	5.21	5.31	5.52
	48	4.27	5.60	6.20	7.31	8.86		5.46	5.53	5.64	5.77	5.85	
ZXD050BE	27	8.99	10.86	11.74	13.54	15.32	17.06	4.38	4.48	4.63	4.83	5.10	5.44
	32	7.87	9.75	10.77	12.57	14.41	16.21	4.93	5.04	5.11	5.40	5.66	6.00
	38	6.67	8.48	9.54	11.35	13.18	14.99	5.51	5.61	5.75	5.95	6.20	6.51
	43	5.86	7.54	8.57	10.31	12.08	13.84	6.14	6.21	6.32	6.48	6.71	6.97
	48	5.04	6.59	7.60	9.26	10.98		6.76	6.81	6.89	7.02	7.22	
ZXD060BE	27	10.22	12.06	13.41	15.56	17.89	21.07	4.42	4.61	5.08	5.41	5.78	6.16
	32	9.34	11.23	12.54	14.72	16.78	19.61	5.28	5.45	5.93	6.26	6.61	6.96
	38	8.36	10.23	11.50	13.51	15.37	17.89	5.91	6.06	6.58	6.83	7.15	7.47
	43	7.44	9.27	10.61	12.57	14.33	16.68	6.71	6.83	7.32	7.57	7.85	8.34
	48	6.27	8.22	9.72	11.62	13.29		7.51	7.59	8.07	8.30	8.54	
ZXD075BE	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19
	48	6.44	8.78	10.07	12.05			8.15	8.26	9.06	9.30		
ZXD100HE	27	15.03	17.86	20.90	24.15	27.61	31.28	6.59	7.02	7.49	8.00	8.58	9.24
	32	14.61	17.32	20.19	23.24	26.46	29.85	7.16	7.64	8.14	8.68	9.28	9.95
	38	14.04	16.60	19.28	22.09	25.03	28.09	7.91	8.45	9.00	9.58	10.21	10.90
	43	13.50	15.94	18.47	21.08	23.78	26.58	8.58	9.17	9.77	10.39	11.06	11.78
	48	12.89	15.22	17.59	20.02	22.49		9.29	9.95	10.60	11.27	11.97	

Notes: ¹Available on TF7 models only.
 The rating condition is based on return gas temperature of 18.3°C.
 The rating condition is based on suction superheat of 10 K.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030BE	27	5.70	6.64	7.48	8.63	10.52	11.57	2.20	2.33	2.61	2.87	2.93	2.86
	32	5.31	6.35	7.24	8.40	10.25	11.27	2.42	2.53	2.79	3.01	3.02	2.92
	38	4.72	5.84	6.75	7.88	9.64	10.62	2.79	2.90	3.14	3.33	3.30	3.19
	43		5.45	6.35					3.23	3.47			
	48												
ZXD040BE	27	7.68	9.32	11.17	13.20	15.41	16.34	2.85	3.04	3.23	3.40	3.49	3.50
	32	7.30	8.93	10.73	12.69	14.77	15.64	3.13	3.30	3.50	3.70	3.86	3.90
	38	6.66	8.27	10.01	11.85	13.77	14.56	3.53	3.66	3.86	4.09	4.31	4.39
	43	6.06	7.64	9.30	11.03	12.81	13.53	3.95	4.04	4.22	4.46	4.72	4.83
	48		6.98	8.56					4.52	4.67			
ZXD050BE	27	9.52	11.65	13.94	16.37	19.26	20.42	3.61	3.77	3.94	4.08	4.20	4.21
	32	9.05	11.21	13.52	15.73	18.47	19.56	3.97	4.11	4.30	4.45	4.64	4.70
	38	8.11	10.33	12.69	14.81	17.35	18.37	4.40	4.54	4.77	4.95	5.23	5.33
	43	7.45	9.47	11.72	13.90	16.40	17.40	4.98	4.98	5.19	5.45	5.82	5.97
	48		8.73	10.79					5.61	5.74			
ZXD060BE	27	10.37	12.69	15.70	18.80	22.69	24.24	3.80	4.18	4.49	4.58	4.62	4.86
	32	9.85	12.20	15.23	17.91	21.39	22.78	4.33	4.74	5.15	5.11	5.14	5.40
	38	9.07	11.50	14.19	16.64	19.76	21.01	4.81	5.27	5.65	5.64	5.75	6.03
	43	8.41	10.59	12.99	15.41	18.34	19.52	5.40	5.72	5.99	6.06	6.26	6.54
	48		9.93	12.07					6.67	6.85			
ZXD075BE	27	12.99	15.24	17.78	20.67			4.92	5.09	5.19	5.28		
	32	12.35	14.49	16.87	19.56			5.61	5.71	5.83	5.86		
	38	11.35	13.34	15.51	17.92			6.22	6.19	6.30	6.37		
	43		12.30	14.28	16.44				6.73	6.72	6.78		
	48												
ZXD076BE	27	13.25	15.54	18.13	21.09	24.47	25.82	4.82	4.98	5.09	5.18	5.14	5.33
	32	12.59	14.78	17.21	19.96	23.07	24.32	5.50	5.59	5.71	5.74	5.71	5.94
	38	11.57	13.60	15.82	18.28	21.06	22.17	6.10	6.07	6.17	6.24	6.31	6.56
	43	10.67	12.55	14.57	16.77	19.23	20.22	6.80	6.60	6.58	6.65	6.75	6.98
	48		11.54	13.33					7.45	7.26			
ZXD100HE	27	16.87	20.66	25.16	30.46	36.67	39.43	5.87	6.48	7.24	8.13	9.16	9.62
	32	15.93	19.24	23.04	27.39	32.33	34.48	6.46	7.03	7.72	8.51	9.43	9.83
	38	14.86	17.75	20.93	24.42	28.22	29.82	7.33	7.88	8.51	9.23	10.04	10.39
	43	14.32	16.99	19.84	22.84	25.97	27.24	8.31	8.87	9.49	10.18	10.93	11.25
	48	13.62	16.08	18.61				9.68	10.27	10.91			

Notes: The rating condition is based on suction superheat of 10K
 ZXD030BE and ZXD100HE rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38oC and 43oC are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)						Power evaporating temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD030BE ¹	27	6.92	8.06	9.40	10.99	12.90	13.76	2.64	2.82	2.97	3.13	3.40	3.55
	32	6.66	7.78	9.01	10.41	12.04	12.78	2.85	3.05	3.20	3.39	3.67	3.83
	38	6.20	7.32	8.45	9.64	10.98	11.56	3.13	3.35	3.54	3.75	4.08	4.25
	43		6.84	7.90					3.65	3.86			
	48												
ZXD040BE	27	8.60	10.44	13.18	15.58	18.18	19.27	3.41	3.64	3.82	4.01	4.11	4.12
	32	8.06	10.00	12.66	14.98	17.45	18.48	3.82	3.96	4.14	4.37	4.56	4.61
	38	7.46	9.27	11.81	13.98	16.25	17.18	4.23	4.39	4.56	4.82	5.08	5.17
	43	6.78	8.56	10.98	13.02	15.12	15.97	4.74	4.85	4.98	5.26	5.57	5.69
	48		7.81	10.10					5.42	5.51			
ZXD050BE	27	10.48	12.81	15.33	18.01	21.19	22.46	4.33	4.53	4.72	4.90	5.04	5.06
	32	9.98	12.32	14.87	17.30	20.30	21.50	4.69	4.93	5.16	5.33	5.58	5.64
	38	8.93	11.36	13.96	16.29	19.08	20.20	5.28	5.44	5.74	5.95	6.28	6.40
	43	8.20	10.42	12.89	15.29	18.04	19.14	5.97	5.97	6.23	6.53	6.98	7.16
	48		9.60	11.87					6.73	6.90			
ZXD060BE	27	12.12	14.84	17.90	21.44	25.87	27.64	4.75	5.22	5.62	5.72	5.77	6.06
	32	11.53	14.28	17.36	20.42	24.39	25.98	5.40	5.93	6.45	6.40	6.43	6.76
	38	10.62	13.45	16.18	18.97	22.53	23.95	6.02	6.58	7.06	7.04	7.17	7.53
	43	9.84	12.40	14.81	17.57	20.92	22.26	6.75	7.14	7.49	7.77	8.22	8.69
	48		11.62	13.76					8.34	8.57			
ZXD075BE	27	15.21	17.84	19.95	23.19	26.90	28.53	6.22	6.42	6.62	6.73	6.68	6.97
	32	14.46	16.96	18.93	21.95	25.38	26.88	7.09	7.21	7.42	7.47	7.45	7.79
	38	13.28	15.62	17.40	20.12	23.18	24.52	7.86	7.83	8.02	8.12	8.21	8.57
	43	12.25	14.41	16.02	18.44	21.15	22.32	8.78	8.51	8.56	8.64	8.77	9.09
	48		13.26	14.68					9.60	9.46			
ZXD100HE	27	19.33	23.44	28.28	34.01	40.80	43.86	6.92	7.62	8.43	9.37	10.44	10.90
	32	18.76	22.42	26.62	31.47	37.09	39.58	7.53	8.25	9.09	10.06	11.17	11.65
	38	17.95	21.24	24.90	28.99	33.59	35.59	8.38	9.15	10.06	11.12	12.33	12.85
	43	17.40	20.54	23.95	27.66	31.72	33.44	9.30	10.16	11.17	12.36	13.71	14.30
	48	16.29	19.27	22.45					10.55	11.55	12.73		

Notes: ¹Available on TF7 models only.
 The rating condition is based on suction superheat of 10K
 ZXD030BE and ZXD100HE rating condition is based on return gas temperature of 18.3°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 60 Hz - TF5/TF7

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020B0	27	1.34	1.81	2.32	2.89	3.53	4.27	5.13	6.12	7.26	1.59	1.65	1.71	1.76	1.82	1.88	1.94	2.01	2.10
	32	1.28	1.78	2.30	2.86	3.49	4.19	5.00	5.92	6.99	1.74	1.80	1.86	1.92	1.98	2.05	2.12	2.20	2.30
	38	1.21	1.74	2.28	2.84	3.44	4.11	4.85	5.70	6.67	1.95	2.01	2.07	2.14	2.21	2.29	2.37	2.47	2.58
	43	1.11	1.67	2.22	2.78	3.36	4.00	4.69	5.48	6.37	2.17	2.23	2.30	2.37	2.45	2.54	2.62	2.74	2.88
	48	0.92	1.51	2.07	2.63	3.20	3.81	4.46	5.18	5.99	2.45	2.52	2.59	2.67	2.76	2.85	2.94	3.07	3.23
ZXL025B0	27	2.38	2.50	2.88	3.47	4.24	5.16	6.19	7.29	8.44	2.02	2.03	2.05	2.09	2.14	2.20	2.29	2.40	2.53
	32	2.36	2.48	2.82	3.38	4.11	4.99	5.97	7.03	8.13	2.23	2.25	2.29	2.33	2.40	2.48	2.58	2.70	2.84
	38	2.34	2.46	2.75	3.26	3.93	4.75	5.67	6.67	7.70	2.62	2.65	2.68	2.73	2.80	2.88	2.98	3.10	3.25
	43	2.31	2.44	2.71	3.16	3.78	4.54	5.41	6.33	7.30	3.01	3.02	3.05	3.09	3.14	3.21	3.29	3.43	3.59
	48	2.30	2.43	2.69	3.08	3.64	4.34	5.13	5.99	6.88	3.38	3.39	3.39	3.41	3.44	3.49	3.59	3.71	3.88
ZXL030B0	27	2.72	2.86	3.28	3.96	4.84	5.88	7.05	8.31	9.62	2.10	2.11	2.13	2.17	2.22	2.29	2.38	2.49	2.63
	32	2.69	2.83	3.22	3.85	4.69	5.69	6.81	8.02	9.27	2.32	2.34	2.38	2.43	2.49	2.58	2.68	2.80	2.95
	38	2.68	2.81	3.14	3.71	4.48	5.42	6.47	7.60	8.78	2.73	2.75	2.79	2.84	2.91	2.99	3.10	3.23	3.38
	43	2.66	2.80	3.09	3.60	4.31	5.18	6.16	7.22	8.32	3.13	3.14	3.17	3.21	3.27	3.34	3.43	3.56	3.74
	48	2.65	2.79	3.07	3.52	4.15	4.95	5.85	6.83	7.84	3.52	3.52	3.53	3.54	3.58	3.63	3.73	3.86	4.03
ZXL035B0	27	3.32	3.46	3.97	4.79	5.85	7.12	8.54	10.06	11.64	2.46	2.47	2.50	2.54	2.60	2.68	2.78	2.92	3.07
	32	3.30	3.45	3.90	4.66	5.67	6.88	8.24	9.70	11.22	2.71	2.74	2.78	2.84	2.92	3.01	3.14	3.28	3.46
	38	3.29	3.45	3.80	4.49	5.43	6.55	7.83	9.20	10.62	3.19	3.22	3.26	3.33	3.40	3.50	3.63	3.78	3.95
	43	3.27	3.42	3.74	4.36	5.22	6.27	7.46	8.74	10.07	3.66	3.68	3.71	3.76	3.82	3.91	4.02	4.18	4.38
	48	3.26	3.40	3.72	4.25	5.03	5.98	7.09	8.27	9.50	4.11	4.12	4.13	4.15	4.19	4.25	4.37	4.53	4.73
ZXL040B0	27	3.90	4.41	5.21	6.29	7.62	9.16	10.90	12.81	14.86	2.98	3.08	3.22	3.36	3.49	3.58	3.66	3.74	3.86
	32	3.61	4.21	5.07	6.17	7.48	8.97	10.62	12.41	14.29	3.25	3.38	3.55	3.72	3.88	3.98	4.08	4.19	4.29
	38	3.36	4.02	4.90	5.98	7.22	8.60	10.10	11.68	13.33	3.71	3.88	4.07	4.27	4.45	4.57	4.68	4.80	4.92
	43	3.16	3.83	4.69	5.70	6.85	8.10	9.43	10.81	12.21	4.17	4.36	4.58	4.80	4.98	5.11	5.23	5.36	5.49
	48	2.88	3.53	4.33	5.25	6.27	7.35	8.47	9.61	10.73	4.68	4.89	5.13	5.35	5.54	5.67	5.80	5.93	6.06
ZXL050B0	27	4.28	4.98	5.94	7.18	8.66	10.40	12.37	14.57	16.99	3.25	3.43	3.65	3.86	4.05	4.20	4.27	4.34	4.40
	32	3.90	4.71	5.73	6.97	8.42	10.06	11.88	13.88	16.04	3.57	3.76	3.98	4.21	4.42	4.58	4.67	4.77	4.86
	38	3.73	4.62	5.67	6.86	8.20	9.66	11.25	12.95	14.76	4.01	4.22	4.47	4.73	4.97	5.17	5.31	5.45	5.59
	43	3.64	4.55	5.56	6.67	7.87	9.15	10.49	11.95	13.51	4.47	4.71	5.00	5.29	5.58	5.83	5.95	6.08	6.20
	48	3.38	4.27	5.22	6.20	7.22	8.27	9.43	10.60	11.84	5.07	5.36	5.69	6.04	6.38	6.69	6.85	7.01	7.16
ZXL060B0	27	5.09	5.92	7.07	8.54	10.31	12.37	14.72	17.34	20.22	4.19	4.43	4.71	4.98	5.23	5.41	5.50	5.59	5.68
	32	4.64	5.60	6.82	8.30	10.02	11.97	14.13	16.51	19.09	4.60	4.85	5.14	5.43	5.70	5.91	6.03	6.15	6.27
	38	4.44	5.50	6.75	8.17	9.76	11.50	13.39	15.41	17.56	5.17	5.44	5.76	6.10	6.41	6.67	6.85	6.91	6.98
	43	4.33	5.41	6.62	7.94	9.37	10.89	12.48	14.22	16.07	5.76	6.08	6.45	6.83	7.20	7.52	7.68	7.85	8.03
	48	4.03	5.09	6.21	7.38	8.60	9.84	11.21	12.61	14.08	6.54	6.91	7.34	7.79	8.23	8.62	8.83	9.09	9.35
ZXL075B0	27	5.40	6.28	7.50	9.05	10.93	13.12	15.60	18.38	21.44	4.61	4.87	5.18	5.48	5.75	5.96	6.05	6.15	6.25
	32	4.91	5.93	7.23	8.80	10.62	12.68	14.98	17.50	20.23	5.06	5.34	5.65	5.97	6.27	6.50	6.63	6.76	6.90
	38	4.71	5.83	7.15	8.66	10.34	12.19	14.19	16.34	18.61	5.68	5.99	6.34	6.71	7.05	7.34	7.54	7.73	7.93
	43	4.59	5.74	7.02	8.42	9.93	11.54	13.23	15.08	17.04	6.34	6.69	7.09	7.51	7.92	8.27	8.45	8.63	8.80
	48	4.27	5.39	6.58	7.82	9.11	10.43	11.89	13.38	14.93	7.19	7.60	8.07	8.57	9.05	9.49	9.71	9.94	10.17

Notes: The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - PFJ/TFD

Model	Ambient temperature (°C)	Capacity evaporating temperature (°C)									Power evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020BE	27	1.52	2.02	2.42	2.86	3.34	3.86	4.42	5.02	5.66	1.35	1.47	1.60	1.73	1.86	2.00	2.14	2.29	2.44
	32	1.45	1.82	2.24	2.70	3.19	3.73	4.31	4.92	5.58	1.50	1.60	1.71	1.83	1.95	2.08	2.21	2.34	2.48
	38	1.25	1.49	1.93	2.40	2.92	3.47	4.07	4.70	5.38	1.72	1.81	1.91	2.01	2.12	2.23	2.34	2.46	2.59
	43	1.10	1.23	1.58	2.07	2.60	3.18	3.79	4.44	5.13	1.95	2.03	2.11	2.20	2.30	2.39	2.50	2.60	2.72
	48	0.99	1.12	1.16	1.67	2.21	2.80				2.22	2.29	2.36	2.44	2.52	2.60			
ZXL025BE	27	1.89	2.31	2.80	3.37	4.02	4.74	5.54	6.42	7.37	1.59	1.68	1.77	1.87	1.97	2.23	2.36	2.50	2.64
	32	1.80	2.26	2.74	3.30	3.94	4.65	5.44	6.31	7.25	1.84	1.90	1.99	2.08	2.18	2.35	2.48	2.61	2.74
	38	1.63	2.03	2.50	3.05	3.68	4.38	5.15	6.01	6.94	2.12	2.16	2.22	2.31	2.41	2.61	2.72	2.84	2.96
	43	1.31	1.70	2.16	2.70	3.31	4.01	4.77	5.62	6.54	2.44	2.45	2.50	2.57	2.67	2.90	3.01	3.11	3.22
	48	1.20	1.24	1.69	2.22	2.82	3.51				2.89	2.90	2.91	2.98	3.08	3.28			
ZXL030BE	27	2.09	2.58	3.17	3.85	4.60	5.41	6.25	7.61	8.67	1.67	1.84	2.00	2.15	2.30	2.45	2.58	2.71	2.83
	32	2.08	2.49	3.00	3.60	4.27	5.00	5.77	7.35	8.38	1.89	2.05	2.20	2.35	2.49	2.62	2.75	2.87	2.99
	38	2.00	2.33	2.77	3.31	3.92	4.59	5.31	6.95	7.95	2.31	2.45	2.60	2.73	2.86	2.99	3.10	3.21	3.32
	43	1.73	2.03	2.44	2.95	3.54	4.19	4.89	6.55	7.52	2.77	2.91	3.05	3.18	3.30	3.41	3.52	3.62	3.72
	48	1.50	1.70	2.00	2.38	2.96	3.61				3.36	3.49	3.61	3.73	3.84	3.95			
ZXL035BE ¹	27	2.55	3.31	4.07	4.85	5.69	6.61	7.63	8.78	10.09	2.26	2.33	2.43	2.56	2.72	2.90	3.08	3.27	3.47
	32	2.47	3.20	3.94	4.68	5.48	6.35	7.31	8.40	9.63	2.59	2.67	2.79	2.93	3.11	3.31	3.52	3.74	3.96
	38	2.37	3.08	3.75	4.45	5.17	5.97	6.85	7.84	8.98	3.00	3.09	3.22	3.38	3.58	3.79	4.03	4.28	4.53
	43	2.28	2.94	3.57	4.20	4.86	5.59	6.38	7.29	8.33	3.31	3.40	3.58	3.70	3.91	4.14	4.39	4.66	4.94
	48	2.17	2.76	3.33	3.89	4.48	5.12				4.00	4.15	4.30	4.45	4.50	4.60			
ZXL040BE ¹	27	3.24	3.99	4.86	5.85	6.93	8.10	9.35	10.66	12.01	2.69	2.88	3.10	3.34	3.40	3.50	4.10	4.31	4.50
	32	3.02	3.77	4.63	5.58	6.63	7.75	8.93	10.16	11.43	2.99	3.17	3.39	3.64	3.90	4.17	4.43	4.67	4.88
	38	2.85	3.56	4.37	5.27	6.25	7.28	8.36	9.48	10.63	3.54	3.70	3.91	4.15	4.41	4.68	4.94	5.19	5.41
	43	2.67	3.34	4.10	4.93	5.83	6.77	7.75	8.76	9.78	4.08	4.22	4.40	4.62	4.87	5.12	5.38	5.63	5.85
	48	2.38	2.99	3.68	4.43	5.23	6.06				4.63	4.73	4.88	5.07	5.29	5.52			
ZXL050BE ¹	27	3.80	4.58	5.58	6.78	8.12	9.57	11.09	12.64	14.19	2.92	3.16	3.39	3.62	3.86	4.09	4.40	4.58	4.83
	32	3.52	4.31	5.29	6.43	7.69	9.04	10.42	11.81	13.17	3.26	3.49	3.72	3.96	4.20	4.46	4.72	5.00	5.29
	38	3.25	4.03	4.98	6.06	7.22	8.43	9.65	10.84	11.97	3.88	4.10	4.33	4.57	4.83	5.11	5.41	5.73	6.07
	43	2.99	3.77	4.69	5.71	6.78	7.87	8.95	9.97	10.89	4.43	4.64	4.87	5.12	5.40	5.70	6.03	6.39	6.77
	48	2.63	3.40	4.28	5.23	6.21	7.19				4.89	5.10	5.33	5.59	5.88	6.21			
ZXL060BE ¹	27	4.49	5.51	6.68	7.99	9.42	10.95	12.57	14.27	16.01	3.62	3.84	4.08	4.36	4.66	4.97	5.30	5.63	5.97
	32	4.30	5.32	6.48	7.77	9.17	10.67	12.26	13.91	15.60	4.04	4.27	4.53	4.83	5.16	5.51	5.88	6.27	6.66
	38	4.07	5.02	6.12	7.34	8.66	10.08	11.57	13.11	14.70	4.60	4.84	5.12	5.44	5.80	6.19	6.61	7.05	7.51
	43	3.81	4.67	5.67	6.79	8.00	9.30	10.67	12.09	13.54	5.17	5.41	5.69	6.03	6.42	6.84	7.30	7.78	8.29
	48	3.42	4.16	5.03	6.00	7.07	8.22				5.88	6.11	6.41	6.76	7.16	7.61			
ZXL075BE ¹	27	4.99	6.14	7.42	8.84	10.40	12.13	14.03	16.12	18.41	3.93	4.20	4.51	4.84	5.21	5.59	6.01	6.44	6.89
	32	4.75	5.90	7.14	8.50	9.99	11.61	13.39	15.33	17.45	4.35	4.63	4.94	5.30	5.68	6.10	6.55	7.03	7.53
	38	4.49	5.61	6.80	8.08	9.46	10.94	12.55	14.30	16.19	4.98	5.25	5.58	5.95	6.36	6.81	7.30	7.83	8.38
	43	4.21	5.30	6.43	7.63	8.90	10.25	11.71	13.28	14.97	5.61	5.89	6.22	6.60	7.03	7.51	8.03	8.59	9.19
	48	3.81	4.85	5.91	7.01	8.16	9.38				6.38	6.65	6.98	7.38	7.82	8.32			

Notes: ¹Available on TFD models only
 The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

Capacity and power (kW) at 50 Hz - TFD

Model	Ambient temperature (°C)	Capacity									Power								
		Evaporating temperature (°C)									Evaporating temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXLD090BE	27	5.53	6.79	8.21	9.78	11.43	13.26	15.34	17.66		4.27	4.61	5.02	5.51	6.00	6.49	6.99	7.50	
	32	5.31	6.55	7.87	9.43	10.95	12.65	14.54	16.72		4.71	4.97	5.47	6.05	6.64	7.08	7.76	8.24	
	38	5.00	6.16	7.50	8.85	10.48	11.90	13.58	15.17		5.44	5.68	6.12	6.33	7.39	8.01	8.67	9.22	
	43	4.72	5.85	6.88	8.57	9.98	11.04	12.74	13.89		6.26	6.46	6.80	7.33	8.07	8.92	9.50	10.03	
	48	4.05	5.39	6.57	7.96						7.12	7.46	7.84	8.38					
ZXLD100HE	27	7.46	8.12	9.30	10.96	13.03	15.48	18.25	21.30	24.58	4.68	4.88	5.10	5.34	5.62	5.94	6.33	6.79	7.34
	32	6.55	7.34	8.58	10.24	12.25	14.57	17.16	19.96	22.92	4.90	5.25	5.58	5.91	6.24	6.59	6.96	7.38	7.86
	38	5.60	6.54	7.86	9.51	11.44	13.62	15.98	18.47	21.06	5.28	5.81	6.29	6.72	7.11	7.49	7.85	8.22	8.61
	43	5.03	6.09	7.47	9.12	10.99	13.04	15.20	17.45	19.72	5.70	6.39	6.98	7.50	7.95	8.35	8.71	9.05	9.36
	48	4.75	5.93	7.37	9.02	10.83	12.74				6.23	7.07	7.79	8.40	8.91	9.34			
ZXLD120BE	27	8.57	10.66	13.15	16.28	19.95	23.88	27.87	31.65	35.44	6.92	7.58	8.22	8.86	9.51	10.18	10.87	11.61	12.36
	32	8.25	10.33	12.72	15.68	19.09	22.83	26.71	30.47	34.24	7.89	8.64	9.37	10.09	10.79	11.51	12.26	13.02	13.73
	38	7.57	9.50	11.73	14.34	17.44	20.94	24.59	28.18	31.76	8.82	9.78	10.66	11.50	12.35	13.08	13.84	14.64	15.29
	43	7.06	9.03	10.78	13.16	16.08	19.15	22.45	25.57	28.70	9.47	10.39	11.30	12.29	13.29	14.15	14.94	15.72	16.32
	48	6.77	8.68	10.28	12.45	15.60	18.36				9.86	10.92	11.92	12.89	14.20	14.92			
ZXLD160BE	27	11.58	14.24	17.39	21.31	25.84	30.62	35.36	39.77		8.51	9.30	10.06	10.82	11.58	12.37	13.18	14.04	
	32	11.23	13.90	16.93	20.66	24.89	29.46	34.11	38.53		9.66	10.55	11.41	12.26	13.08	13.92	14.79	15.67	
	38	10.37	12.87	15.72	19.01	22.88	27.20	31.61	35.85		10.73	11.87	12.91	13.88	14.88	15.72	16.59	17.51	
	43	9.73	12.39	14.70	17.85	21.70	25.70	29.97	33.96		11.49	12.58	13.65	14.81	15.98	16.97	17.87	18.76	
	48	9.40	12.03	14.20	17.15	21.43	25.15				11.85	13.09	14.26	15.38	16.91	17.73			
ZXLD200BE	27	12.45	16.13	19.75	23.48	27.41	31.60	36.15	41.11		9.15	10.20	11.27	12.30	13.24	14.03	14.77	15.23	
	32	12.19	15.88	19.27	22.82	26.58	30.65	35.13	40.03		10.17	11.18	12.24	13.30	14.30	15.19	15.93	16.44	
	38	11.82	15.50	18.74	22.14	25.77	29.73	34.08	38.95		11.45	12.48	13.59	14.74	15.82	16.88	17.86	18.70	
	43	11.52	14.96	18.10	21.35	25.48	29.20	33.44	38.24		12.11	13.44	14.68	15.94	17.29	18.57	19.84	20.99	
	48	11.42	14.69	17.66	20.82	24.90	28.50				12.53	14.11	15.49	17.12	18.73	20.32			

Notes: The rating condition is based on the return gas temperature of 5°C.
 Power includes condenser fan.
 Ambient 38°C and 43°C are typical design conditions for unit selection.

ZX Family: Medium temperature

Technical data at 50 Hz - PFJ

Family			ZX				
Nominal Rating	Horsepower	HP	2	2.5	3	4	
Model Name			ZX020B0 ZX020BE	ZX025B0 ZX025BE	ZX030B0 ZX030BE	ZX040B0 ZX040BE	
Performance	R22	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	R404A (R507A)	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	R407F	ET/AT/RGT	°C				
		Capacity	kW				
		COP	W/W				
	Sound Pressure Level	@1m	dB(A)				
	Compressor	Rated Load Ampere	R22				
			R404A (R507A)	Amp	13.2	14.6	16.4
R407F							
Locked Rotor Ampere		R22					
		R404A (R507A)	Amp	58.0	61.0	82.0	114.0
	R407F						
Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE				
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	1.18	1.33		1.83	
Fan Motor	Number of Fan		Pieces	1			
	Diameter		mm	450			
	Fan Speed		rpm	933			
	Air Flow	Total	m ³ /h	3483			
	Total Fan Motor Power	Input	W	116			
Others	Oil Separator	Volume	Liters	0.5			
	Receiver Volume	R22		5.1			
		R404A (R507A)	kg	4.4			
		R407F		4.5			
	Pipes	Suction OD		x3/4			
		Liquid OD	Inch	1/2			
Dimension	W x D x H	mm	1029 x 424 x 840				
Weight	Net		76	79	79	100	
	Gross	kg	114	117	117	138	

ZX Family: Medium temperature

Technical data at 50 Hz - TFD

Family			ZX								
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	7.6		
Model Name			ZX020B0	ZX030B0	ZX040B0	ZX050B0	ZX060B0	ZX075B0	ZX076B0		
			ZX020BE	ZX030BE	ZX040BE	ZX050BE	ZX060BE	ZX075BE	ZX076BE		
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	3.85	5.53	7.57	9.30	11.20	12.60	12.85	
		COP	W/W	2.41	2.43	2.43	2.66	2.60	2.57	2.65	
	R404A (R507A)	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	4.30	6.00	7.80	10.70	11.80	13.20	13.46	
		COP	W/W	2.26	2.35	2.29	2.40	2.41	2.40	2.50	
	R407F	ET/AT/RGT	°C	-6.7/32/18.3							
		Capacity	kW	4.40	6.31	8.37	10.49	11.68	12.73	12.98	
		COP	W/W	2.32	2.38	2.38	2.44	2.56	2.56	2.55	
	Sound Pressure Level	@1m	dB(A)	56	56	56	60	60	60	60	
	Compressor	Rated Load Ampere	R22	Amp	4.3	5.7	7.4	8.9	11.5	12.0	12.0
			R404A (R507A)	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8
R407F			Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8	
Locked Rotor Ampere		R22	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0	
		R404A (R507A)	Amp								
		R407F	Amp								
Oil Type		R22 R404A (R507A) R407F		MINERAL POE POE							
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	1.18	1.33	1.83	1.83	1.66	1.66	1.66		
Fan Motor	Number of Fan		Pieces	1	1	1	2	2	2	2	
	Diameter		mm	450							
	Fan Speed		rpm	830							
	Air Flow	Total	m ³ /h	2922	2922	2922	5910	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	246	246	246	246	
Others	Oil Separator	Volume	Liters	0.5							
	Receiver Volume	R22	kg	5.1	5.1	5.1	7.2	7.2	7.2	7.2	
		R404A (R507A)	kg	4.4	4.4	4.4	6.3	6.3	6.3	6.3	
		R407F	kg	4.5	4.5	4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD	Inch	1/2							
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242		
Weight	Net	kg	76	79	100	108	112	118	121		
	Gross	kg	114	117	121	152	156	162	154		

ZX Family: Medium temperature

Technical data at 60 Hz - PFV/TF5/TF7

Family			ZX						
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	
Model Name			ZX020B0 ZX020BE	ZX030B0 ZX030BE	ZX040B0 ZX040BE	ZX050B0 ZX050BE	ZX060B0 ZX060BE	ZX075B0 ZX075BE	
Performance	R22	ET/AT/RGT	-6.7/32/18.3						
		Capacity	4.79	6.49	9.52	10.76	12.77	14.18	
		COP	2.42	2.37	2.56	2.51	2.45	2.37	
	R404A (R507A)	ET/AT/RGT	-6.7/32/18.3						
		Capacity	5.10	7.30	10.16	12.46	14.48	15.28	
		COP	2.37	2.27	2.48	2.43	2.42	2.22	
	R407F	ET/AT/RGT	-6.7/32/18.3						
		Capacity	5.44	7.79	10.34	12.95	14.42	15.72	
		COP	2.29	2.35	2.35	2.41	2.53	2.52	
	Sound Pressure Level	@1m	dB(A)	56	56	60	60	60	60
	Compressor	Rated Load Ampere	R22	-/8.9/5.0	-/11.4/7.5	-/15.0/9.3	-/20.7/10.7	-/20.7/10.7	-/25.0/12.1
			R404A (R507A)	15.7/8.9/5.1	20.7/12.1/7.4	25.0/15.7/9.6	30.8/24.0/12.4	-/23.1/12.6	-/26.0/14.1
R407F			-/8.9/5.1	-/12.1/7.4	-/15.7/9.6	-/24.0/12.4	-/23.1/12.6	-/26.0/14.1	
Locked Rotor Ampere		R22	-/55.0/27.0	-/77.0/39.0	-/115.0/54.0	-/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
		R404A (R507A)	61.0/27.0/61.0	95.0/77.0/39.0	137.0/115.0/54.0	144.0/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
		R407F	-/55.0/27.0	-/77.0/39.0	-/115.0/54.0	-/128.0/64.0	-/156.0/70.0	-/164.0/100.0	
Oil Type		R22 R404A (R507A) R407F		MINERAL POE POE					
Oil Recharge Volume		R22/R404A (R507A)/R407F	Liters	1.18	1.33	1.83	1.83	1.66	1.66
Fan Motor		Number of Fan	Pieces	1	1	2	2	2	2
	Diameter	mm	450						
	Fan Speed	rpm	933						
	Air Flow	Total	m³/h	3483	3483	6966	6966	6966	6966
	Total Fan Motor Power	Input	W	145	145	290	290	290	290
Others	Oil Separator	Volume	Liters	0.5					
	Receiver Volume	R22	kg	5.1	5.1	7.2	7.2	7.2	7.2
		R404A (R507A)	kg	4.4	4.4	6.3	6.3	6.3	6.3
		R407F	kg	4.5	4.5	6.4	6.4	6.4	6.4
	Pipes	Suction OD Liquid OD	Inch	3/4 1/2					
	Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242
Weight	Net	kg	76	79	100	108	112	112	
	Gross	kg	114	117	135	152	156	162	

ZXB Family: Medium temperature

Technical data at 50 Hz - TFD

Family				ZXB							
Nominal Rating	Horsepower	HP		1.5	2	2.5	3	3.5	4	5	5.5
Model Name				ZXB015BE	ZXB020BE	ZXB025BE	ZXB030BE	ZXB035BE	ZXB040BE	ZXB050BE	ZXB060BE
Power				3							
Performance	ET/AT/RGT	°C		-6.7/32/18.3							
	R134a Capacity	kW		3.20	3.76	3.92	4.96	6.61	7.23	8.52	9.38
	COP	W/W		2.73	3.01	2.74	2.86	2.88	2.94	2.91	2.65
	Sound Pressure Level	@1m	dB(A)	56					60		
Compressor	Rated Load Ampere	R134a	Amp	5.0	5.6	5.6	7.1	7.1	7.9	10.0	12.1
	Locked Rotor Ampere	R134a	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0
	Oil Type	R134a		POE							
	Oil Recharge Volume	R134a		0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77
	Oil Initial Volume	R134a	Liters	0.74	0.74	0.74	1.36	1.36	1.36	1.89	1.89
Fan Motor	Number of Fan		Pieces	1	1	1	1	1	2	2	2
	Diameter		mm	450							
	Fan Speed		rpm	830							
	Air Flow	Total	m ³ /h	2922	2922	2922	2922	2922	5910	5910	5910
	Fan Motor Power	Input	W	116	116	116	116	116	246	246	246
Others	Oil Separator	Volume	Liters	0.5							
	Receiver Volume	R134a	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	7.2
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8
		Liquid OD	Inch	1/2							
	Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242
Weight	Net	kg	79	81	81	93	93	106	116	121	
	Gross	kg	117	119	119	131	131	150	160	165	

ZXD Family: Digital medium temperature

Technical data at 50 Hz - TFD

Family				ZXD										
Nominal Rating	Horse-power	HP		3	4	5	6	7.5	7.6	9	10	12	16	20
Model Name				ZXD030B0	ZXD040B0	ZXD050B0	ZXD060B0	ZXD075B0	ZXD076B0	/	/	/	/	/
				ZXD030BE	ZXD040BE	ZXD050BE	ZXD060BE	ZXD075BE	ZXD076BE	ZXD090BE	ZXD100HE	ZXD120BE	ZXD160BE	ZXD200BE
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3										
		Capacity	KW	5.49	7.76	9.30	11.0	12.84	13.09	/	/	/	/	/
		COP	W/W	2.60	2.67	2.65	2.64	2.53	2.67	/	/	/	/	/
	R404A (R507A)	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-7/32/18	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3
		Capacity	KW	5.82	8.30	10.70	11.80	13.20	13.46	15.00	18.80	24.22	29.81	37.86
		COP	W/W	2.45	2.47	2.43	2.41	2.43	2.49	2.39	2.60	2.41	2.37	2.34
	R407F	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-7/32/18	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3
		Capacity	KW	6.04	8.28	10.34	11.26	13.63	13.90	/	17.86	/	/	/
		COP	W/W	2.47	2.71	2.73	2.46	2.40	2.50	/	2.63	/	/	/
	Sound Pressure Level	@1m	dB(A)	56	60	60	60	60	60	62	62	65	69	72
Compressor	Rated Load Ampere	R22	Amp	7.4	7.9	10.0	10.0	12.1	12.1	/	/	/	/	/
		R404A (R507A)	Amp	7.4	7.7	10.4	12.4	12.4	12.4	12.7	14.6	9.6+10.1	11.1+11.1	14.6+14.6
		R407F	Amp	7.4	7.9	10.0	12.1	12.1	12.1	/	14.6	/	/	/
	Locked Rotor Ampere	R22	Amp	40.0	48.0	64.0	74.0	100.0	100.0	/	/	/	/	/
		R404A (R507A)	Amp	40.0	48.0	64.0	74.0	100.0	100.0	100.0	102.0	74.0	74.0	102.0
		R407F	Amp	40.0	48.0	64.0	74.0	100.0	100.0	/	102.0	/	/	/
Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE											
Oil Recharge Volume	R22 R404A (R507A) R407F	Liters	1.12	1.24	1.77	1.77	1.77	1.77	1.89	1.9	1.9+1.8	1.9+1.9		
Fan Motor	Number of Fan	Pieces	1	3	2	2	2	2	2	2	2	2	3	
	Diameter	mm	450	450	450	450	450	450	450	560	590	590	600	
	Fan Speed	rpm	830	830	830	830	830	830	830	900	850	850	860	
	Air Flow	Total	m³/h	2922	5910	5910	5910	5910	5910	5910	12000	19280	19280	23400
	Total Fan Motor Power	Input	W	116	246	246	246	246	246	246	500	950	950	1350
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	2.5	2.5	3
	Receiver Volume	R22	kg	5.1	7.2	7.2	7.2	7.2	7.2	/	/	/	/	/
		R404A (R507A)	kg	4.4	6.3	6.3	6.3	6.3	6.3	6.3	12	17	17	17
		R407F	kg	4.5	6.4	6.4	6.4	6.4	6.4	/	12	/	/	/
	Pipes	Suction OD	Inch	3/4	7/8	7/8	7/8	7/8	7/8	7/8	1 1/8	1 3/8	1 3/8	1 3/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1321 x 564 x 1815	1619 x 1010 x 1124	1619 x 1010 x 1124	2033 x 857 x 1913	
Weight	Net	kg	85	104	112	114	119	122	135	165	357	362	550	
	Gross	kg	123	148	156	158	163	171	182	220	457	462	600	

ZXD Family: Digital medium temperature

Technical data at 60 Hz - TF5/TF7

Family			ZXD						
Nominal Rating	Horsepower	HP	3	4	5	6	7.5	10	
Model Name			ZXD030B0	ZXD040B0	ZXD050B0	ZXD060B0	ZXD075B0	/	
			ZXD030BE	ZXD040BE	ZXD050BE	ZXD060BE	ZXD075BE	ZXD100HE	
Performance	R22	ET/AT/RGT	°C	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	-6.7/32/18.3	
		Capacity	kW	5.93	8.46	10.84	12.79	13.99	/
		COP	W/W	2.39	2.45	2.45	2.43	2.40	
	R404A (R507A)	ET/AT/RGT	°C	-10/32/18.3					
		Capacity	kW	6.33	8.70	10.77	12.54	13.84	20.19
		COP	W/W	2.23	2.18	2.11	2.12	2.08	2.49
	R407F	ET/AT/RGT	°C	-10/32/18.3					
		Capacity	kW	6.66	8.06	9.98	11.53	14.46	18.76
		COP	W/W	2.33	2.11	2.13	2.13	2.04	2.63
	Sound Pressure Level	@1m	dB(A)	56	60	60	60	60	62
Compressor	Rated Load Ampere	R22	Amp		17.1/9.3	20.7/10.7	20.7/12.5	25.0/14.3	/
		R404A (R507A)		-6.1	16.7/9.6	23.7/11.6	25.4/12.9	30.0/14.6	31.5/15.1
		R407F			16.7/9.6	23.7/11.6	25.4/12.9	30.0/14.6	31.5/15.1
	Locked Rotor Ampere	R22							/
		R404A (R507A)		-38	110.0/54.0	137.0/64.0	156.0/70.0	164.0/78.0	224.0/119.6
		R407F							224.0/119.6
	Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE					
	Oil Recharge Volume	R22	Liters	1.12	1.24	1.77	1.77	1.77	/
		R404A (R507A)		1.12	1.24	1.77	1.77	1.77	1.9
R407F			1.12	1.24	1.77	1.77	1.77	1.9	
Fan Motor	Number of Fan	Pieces	1	2	2	2	2	2	
	Diameter	mm	450	450	450	450	450	560	
	Fan Speed	rpm	830	933	933	933	933	900	
	Air Flow	Total	m³/h	2922	6966	6966	6966	6966	12000
	Total Fan Motor Power	Input	W	116	290	290	290	290	500
Others	Oil Separator	Volume	Liters	0.5					
	Receiver Volume	R22	kg	5.1	7.2	7.2	7.2	7.2	/
		R404A (R507A)		4.4	6.3	6.3	6.3	6.3	12
		R407F		4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	7/8	7/8	7/8	7/8	1 1/8
		Liquid OD		1/2					
Dimension	W x D x H	mm	1029x424x840	1029x424x1242	1029x424x1242	1029x424x1242	1029x424x1242	1321x564x1815	
Weight	Net	kg	85	109	117	121	127	170	
	Gross		123	148	156	158	163	225	

ZXL Family: Low temperature

Technical data at 50 Hz - PFJ

Nominal Rating	Family		ZXL			
	Horsepower	HP	2	2.5	3	
Model Name			ZXL020B0	ZXL025B0	ZXL030B0	
			ZXL020BE	ZXL025BE	ZXL030BE	
Performance	R22	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	1.72	1.91	2.34
		COP	W/W	1.2	1.17	1.28
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	2.11	2.51	2.8
		COP	W/W	1.24	1.28	1.29
	R407F	ET/AT/RGT	°C	-32/32/5		
		Capacity	kW	1.86	2.29	2.6
		COP	W/W	0.99	1.02	1.02
	Sound Pressure Level	@1m	dB(A)	56		
	Compressor	Rated Load Ampere	R22			
			R404A (R507A)	Amp	12.7	13.3
R407F						
Locked Rotor Ampere		R22				
	R404A (R507A)	Amp	56.6	73.7	82.3	
	R407F					
Oil Type	R22		MINERAL			
	R404A (R507A)		POE			
	R407F		POE			
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	0.56			
Fan Motor	Number of Fan		Pieces	1		
	Diameter		mm	450		
	Fan Speed		rpm	830		
	Air Flow	Total	m³/h	2922		
	Total Fan Motor Power	Input	W	116		
Others	Oil Separator	Volume	Liters	0.5		
	Receiver Volume	R22		5.1	5.1	7.5.1
		R404A (R507A)	kg	4.4		
		R407F		4.5		
	Pipes	Suction OD	Inch	3/4		
		Liquid OD		1/2		
Dimension	W x D x H	mm	1029 x 424 x 840			
Weight	Net		79	81	81	
	Gross	kg	117	119	119	

ZXL Family: Low temperature

Technical data at 50 Hz - TFD

Nominal Rating	Family			ZXL								
		Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5	
Model Name				ZXL020B0	ZXL025B0	ZXL030B0	ZXL035B0	ZXL040B0	ZXL050B0	ZXL060B0	ZXL075B0	
				ZXL020BE	ZXL025BE	ZXL030BE	ZXL035BE	ZXL040BE	ZXL050BE	ZXL060BE	ZXL075BE	
Performance	R22	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	1.72	1.91	2.34	2.78	3.57	4.05	4.96	5.39	
		COP	W/W	1.20	1.17	1.28	1.26	1.24	1.29	1.27	1.28	
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	2.11	2.51	2.8	3.65	4.26	4.99	5.91	6.65	
		COP	W/W	1.24	1.28	1.29	1.34	1.29	1.36	1.33	1.38	
	R407F	ET/AT/RGT	°C	-32/32/5								
		Capacity	kW	1.86	2.29	2.60	3.61	4.25	4.61	5.66	6.25	
		COP	W/W	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29	
	Sound Pressure Level	@1m	dB(A)	56					60			
	Compressor	Rated Load Ampere	R22	Amp	5.4	5.5	5.7	7.4	8.1	8.8	11.1	12.1
			R404A (R507A)		5.6	6.2	6.0	8.3	8.6	10.0	11.1	14.6
R407F			5.6		6.2	6.5	8.3	8.6	10.0	11.1	14.6	
Locked Rotor Ampere		R22	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0	
		R404A (R507A)										
		R407F										
Oil Type		R22		MINERAL								
	R404A (R507A)	POE										
	R407F	POE										
Oil Recharge Volume	R22/R404A (R507A)/R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77		
Fan Motor	Number of Fan		Pieces	1	1	1	1	1	2	2	2	
	Diameter		mm	450								
	Fan Speed		rpm	830								
	Air Flow	Total	m³/h	2922	2922	2922	2922	2922	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	116	116	246	246	246	
Others	Oil Separator	Volume	Liters	0.5								
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	7.2	
		R404A (R507A)		4.4	4.4	4.4	4.4	4.4	6.3	6.3	6.3	
		R407F		4.5	4.5	4.5	4.5	4.5	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD		1/2								
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242		
Weight	Net	kg	79	81	81	93	93	106	116	121		
	Gross		117	119	119	131	131	150	165	170		

ZXLD Family: Low temperature

Technical data at 50 Hz -TFD

Family			ZXLD					
Nominal Rating	Horsepower	HP	9	10	12	16	20	
Model Name			ZXLD090BE	ZXLD100HE	ZXLD120BE	ZXLD160BE	ZXLD200BE	
Performance	ET/AT/RGT	°C	-32/32/5					
	R404A (R507A) Capacity	kW	7.24	8.03	11.76	15.72	17.91	
	COP	W/W	1.38	1.47	1.30	1.42	1.52	
	Sound Pressure Level @1m	dB(A)	62	62	69	69	72	
Compressor	Rated Load Ampere	R404A (R507A) Amp	14.6	14.6	11.1+11.1	14.6 + 14.6	14.6 + 14.6	
	Locked Rotor Ampere	R404A (R507A) Amp	102	102	74	102	121	
	Oil Type	R404A (R507A)	POE					
	Oil Recharge Volume	Liters	1.89	1.9	1.9 + 1.9	1.9 + 1.9	1.9 + 1.9	
Fan Motor	Number of Fan	Pieces	2	2	2	2	3	
	Diameter	mm	450	560	590	590	600	
	Fan Speed	rpm	830	900	850	850	860	
	Air Flow Total	m³/h	5910	12000	19280	19280	23400	
	Total Fan Motor Power Input	W	246	500	950	950	1350	
Others	Oil Separator Volume	Liters	0.5	0.5	2.5	2.5	3	
	Receiver Volume (at 32°C)	kg	6.3	12	17	17	17	
	Pipes	Suction OD	Inch	7/8	1 1/8"	1 3/8	1 3/8	1 3/8
		Liquid OD		1/2	1/2"	3/4	3/4	3/4
	Dimension	W x D x H	mm	1029 x 424 x 1242	1321 x 564 x 1815	1619 x 1010 x 1124	1619 x 1010 x 1124	2033 x 857 x 1913
Weight	Net	kg	138	170	362	362	470	
	Gross		158	225	462	462	550	


ZXL Family: Low temperature

Technical data at 60 Hz - PFV/TF5/TF7


Nominal Rating	Family			ZXL								
		Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5	10
Model Name				ZXL020B0	ZXL025B0	ZXL030B0	ZXL035B0	ZXL040B0	ZXL050B0	ZXL060B0	ZXL075B0	/
				ZXL020BE	ZXL025BE	ZXL030BE	ZXL035BE	ZXL040BE	ZXL050BE	ZXL060BE	ZXL075BE	ZXLD100HE
Performance	R22	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.09	2.69	2.99	3.71	4.72	5.32	6.34	6.81	/
		COP	W/W	1.14	1.18	1.28	1.34	1.36	1.37	1.27	1.24	/
	R404A (R507A)	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.41	2.83	3.54	4.19	5.18	6.26	7.52	7.98	8.89
		COP	W/W	1.12	1.15	1.32	1.33	1.44	1.29	1.32	1.46	
	R407F	ET/AT/RGT	°C	-32/32/5°C								
		Capacity	kW	2.28	2.80	3.18	4.42	5.20	5.64	6.93	7.65	7.34
		COP	W/W	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29	1.31
	Sound Pressure Level	@1m	dB(A)	56	56	56	56	60	60	60	60	62
Compressor	Rated Load Ampere	R22	Amp	-/	-/	-/	-/	-/	-/	-/	-/	/
		R404A (R507A)	Amp	12.1/5.4	12.6/5.5	12.9/6.9	19.1/7.7	20.0/9.9	21.4/12.6	25.5/14.1	28.9/14.4	/
		R407F	Amp	16.4/12.1/5.6	-/12.6/6.2	-/12.6/6.9	26.4/19.1/8.6	30.4/20.0/9.9	34.1/21.4/12.6	-/25.5/14.1	-/28.9/14.4	-/31.5/15.1
	Locked Rotor Ampere	R22	Amp	-/	-/	-/	-/	-/	-/	-/	-/	/
		R404A (R507A)	Amp	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3	/
		R407F	Amp	68.0/73.0/34.8	-/73.0/34.8	-/73.0/38.6	137.0/110.0/47.0	141.0/110.0/66.0	176.0/110.0/73.5	-/186.6/94.3	-/191.0/94.3	-/224/119.6
	Oil Type	R22 R404A (R507A) R407F		MINERAL POE POE								
	Oil Recharge Volume	R22 R404A (R507A) R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	/
				0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	1.9
				0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	1.9
Fan Motor	Number of Fan	Pieces	1	1	1	1	2	2	2	2	2	
	Diameter	mm	450	450	450	450	450	450	450	450	560	
	Fan Speed	rpm	933	933	933	933	933	933	933	933	900	
	Air Flow	Total	m³/h	3483	3483	3483	3483	6966	6966	6966	6966	12000
	Total Fan Motor Power	Input	W	145	145	145	145	290	290	290	290	500
Others	Oil Separator	Volume	Liters	0.5								
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	/
		R404A (R507A)	kg	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	12
		R407F	kg	4.5	4.5	4.5	4.5	6.4	6.4	6.4	6.4	12
	Pipes	Suction OD Liquid OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8	1 1/8"
Dimension	W x D x H	mm	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 840	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1029 x 424 x 1242	1321 x 564 x 1815	
Weight	Net	kg	79	81	81	93	93	106	116	121	175	
	Gross	kg	117	119	119	131	143	150	165	170	230	

Dimensional drawings


ZX-PFJ (2 HP-4 HP)
 ZX-TFD (2HP-4HP), ZX-PFV/TF5/TF7 (2HP-3HP), ZXB-TFD (1.5HP-3.5HP)
 ZXL-PFJ (2HP-3HP)
 ZXL-TFD (2HP-4HP), ZXL-PFV (2HP, 3.5HP), ZXL-TF5/7 (2HP-3.5HP)
 ZXD-TFD (3HP), ZXD-TF7(3HP)

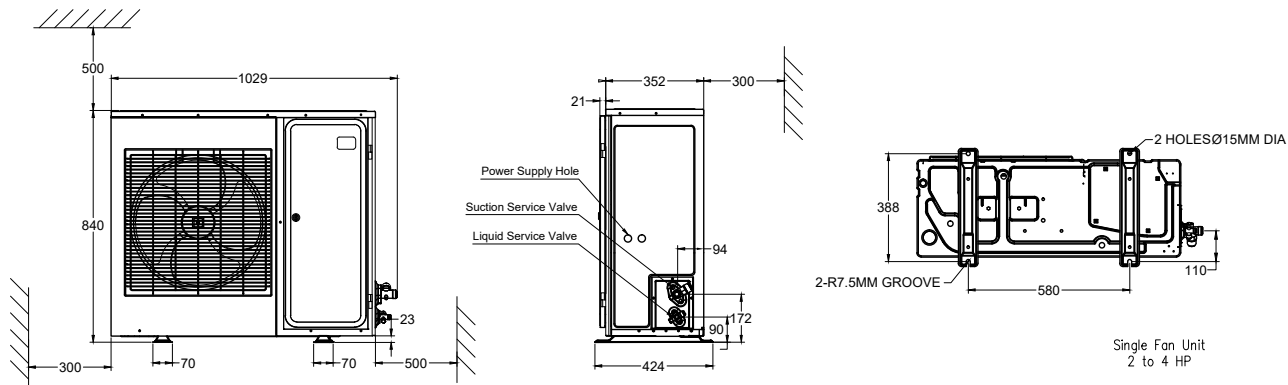

ZX-TFD (5HP-7.6HP), ZX-PFV (4HP-5HP), ZX-TF5/7 (4HP-7.5HP), ZXB-TFD (4HP-6HP)
 ZXL-TFD (5HP-7.5HP), ZXL-PFV (4HP-5HP), ZXL-TF5/7 (4HP-7.5HP),
 ZXD-TFD (4HP-9HP), ZXD-TF5/7 (4HP-7.5HP), ZXLD-TFD (9HP)

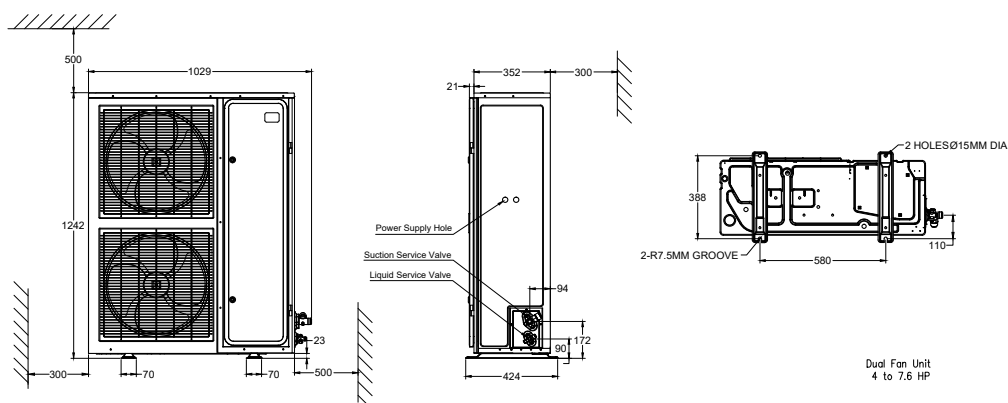


ZXD-TFD (10HP), ZXD-TF5/7 (10HP)

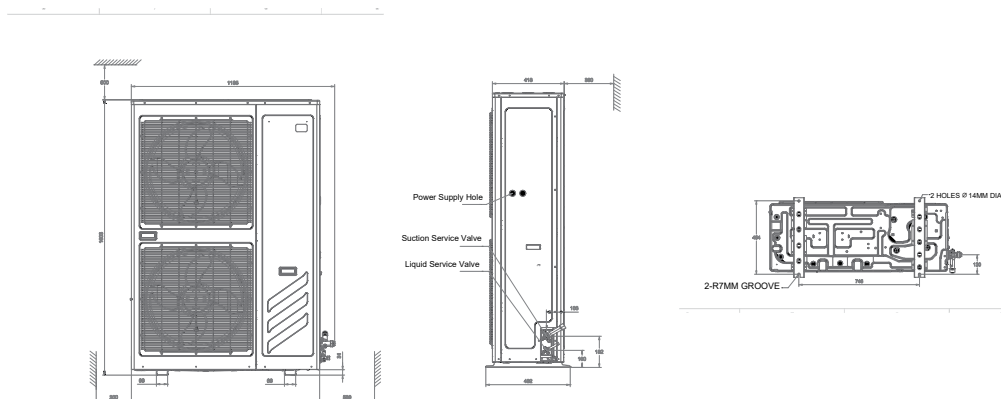


Fixing dimension and distance – Top air throw unit

Dimensional drawings

ZXD-TFD (12HP-16HP), ZXLD-TFD (12HP-16HP)

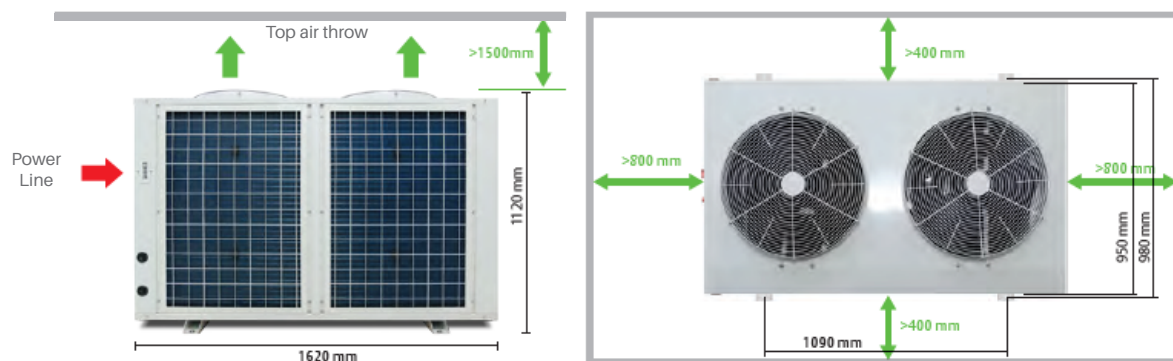

ZXD-TFD (20HP), ZXLD-TFD (20HP)

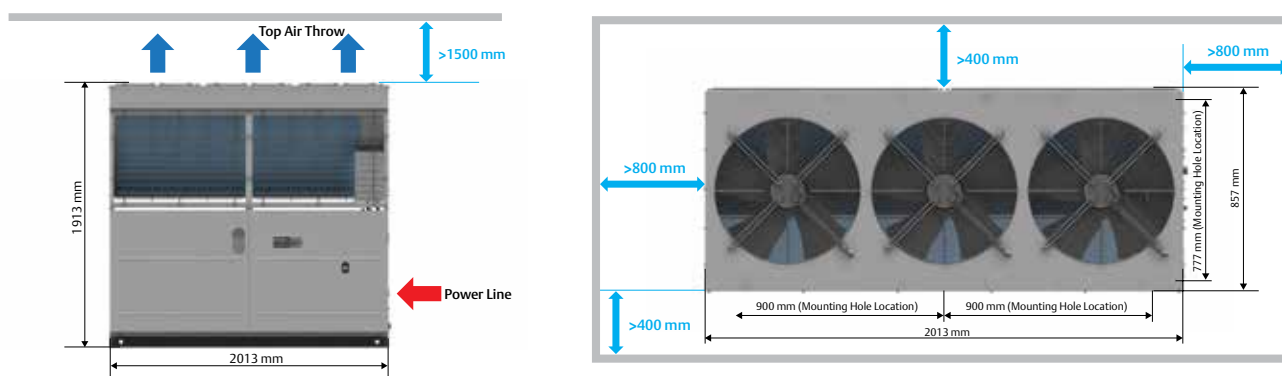

Fixing dimension and distance – Top air throw unit

Packing information

Container loading, ZX Platform condensing unit					
Family	Model	Motor code	Fan type	20FT	40FT/ 40FT H
ZX/ZXB	ZXB015BE	TFD	Single Fan	40	80
	ZXB020BE / ZX020B0(E)	PFJ/TFD/PFV/TF5/TF7			
	ZXB025BE / ZX025B0(E)	PFJ/TFD			
	ZXB030BE / ZX030B0(E)	PFJ/TFD/PFV/TF5/TF7			
	ZXB035BE	TFD			
	ZX040B0(E)	PFJ			
	ZXB040BE / ZX040B0(E)	TFD/PFV/TF5/TF7	Dual Fan	20	40
	ZXB050BE / ZX050B0(E)				
	ZXB060BE	TFD			
	ZX060B0(E)	TFD/TF5/TF7			
	ZX075B0(E)				
	ZX076B0(E)				
ZXD	ZXD030B0(E)	TFD/TF7	Single Fan	40	80
	ZXD040B0(E)	TFD/TF5/TF7	Dual Fan	20	40
	ZXD050B0(E)				
	ZXD060B0(E)				
	ZXD075B0(E)				
	ZXD076B0(E)				
	ZXD090BE	TFD			
	ZXD100HE	TFD/TF5/TF7	Large Dual Fan	10	20
	ZXD120BE	TFD	Top air throw	6	13
	ZXD160BE			5 ¹	11 ¹
ZXD200BE					
ZXL/ZXLD	ZXL020B0(E)	PFJ/TFD/TF5/TF7	Single Fan	40	80
	ZXL025B0(E)				
	ZXL030B0(E)				
	ZXL035B0(E)	TFD/TF5/TF7			
	ZXL040B0(E)	TFD			
	ZXL040B0(E)	TF5/TF7	Dual Fan	20	40
	ZXL050B0(E)	TFD/TF5/TF7			
	ZXL060B0(E)				
	ZXL075B0(E)				
	ZXLD090BE	TFD			
	ZXLD100HE	TFD/TF5/TF7	Large Dual Fan	10	20
	ZXLD120BE	TFD	Top air throw	6	13
	ZXLD160BE			5 ¹	11 ¹
ZXLD200BE					

Note: ¹High type container only

Conversion chart

Units conversion chart
KCALH x 3.9683 = BTUH
WATTS x 3.413 = BTU/H
1.80 x °C + 32 = °F
KILOGRAMS x 2.205 = POUNDS
MILLIMETERS x 0.0394 = INCHES
CUBIC CENTIMETERS x 0.06102 = CUBIC INCHES
CUBIC METERS x 35.3147 = CUBIC FEET
LITERS x 33.8181 = FLUID OUNCES
KILOWATTS x 1.341 = HORSEPOWER
BAR x 14.7 = PSI

Pressure temperature chart at sea level

°C	R-134a	R22	R404A HP 62	R407F Vapor	R407F Liquid	R407A Vapor	R407A Liquid	R407C Vapor	R407C Liquid	R408A	R410A	R502	R507A AZ50	°F
-45.6	0.63	0.21	0.00	-0.26	0.03	0.30	0.03	0.37	0.09	0.07	0.34	-0.03	0.06	-50.0
-44.4	0.61	0.16	0.05	-0.22	0.08	0.26	0.03	0.33	0.04	0.02	0.41	0.02	0.12	-48.0
-43.3	0.59	0.12	0.11	-0.17	0.14	0.22	0.08	0.29	0.01	0.04	0.48	0.08	0.18	-46.0
-42.2	0.56	0.06	0.17	-0.12	0.20	0.17	0.14	0.25	0.07	0.10	0.57	0.14	0.24	-44.0
-41.1	0.53	0.01	0.23	-0.07	0.27	0.12	0.21	0.20	0.13	0.15	0.65	0.19	0.30	-42.0
-40.0	0.50	0.04	0.30	-0.02	0.34	0.07	0.27	0.16	0.19	0.21	0.74	0.26	0.37	-40.0
-38.9	0.47	0.10	0.37	0.04	0.41	0.01	0.34	0.11	0.26	0.28	0.83	0.32	0.44	-38.0
-37.8	0.44	0.15	0.43	0.10	0.48	0.04	0.41	0.06	0.32	0.34	0.92	0.39	0.52	-36.0
-36.7	0.41	0.21	0.51	0.16	0.56	0.10	0.48	0.00	0.39	0.41	1.01	0.46	0.59	-34.0
-35.6	0.37	0.28	0.59	0.22	0.64	0.16	0.56	0.06	0.46	0.48	1.12	0.53	0.68	-32.0
-34.4	0.33	0.34	0.66	0.29	0.72	0.23	0.63	0.11	0.53	0.55	1.22	0.60	0.75	-30.0
-33.3	0.29	0.41	0.74	0.36	0.80	0.29	0.72	0.17	0.61	0.63	1.33	0.68	0.84	-28.0
-32.2	0.25	0.48	0.83	0.43	0.89	0.36	0.80	0.23	0.69	0.71	1.44	0.76	0.93	-26.0
-31.1	0.21	0.55	0.92	0.51	0.98	0.43	0.89	0.30	0.77	0.79	1.56	0.84	1.02	-24.0
-30.0	0.17	0.63	1.01	0.59	1.08	0.51	0.98	0.37	0.86	0.88	1.68	0.93	1.12	-22.0
-28.9	0.13	0.70	1.10	0.67	1.18	0.59	1.08	0.45	0.94	0.97	1.81	1.01	1.21	-20.0
-27.8	0.08	0.79	1.20	0.75	1.28	0.67	1.17	0.52	1.04	1.06	1.94	1.11	1.32	-18.0
-26.7	0.03	0.87	1.30	0.84	1.39	0.75	1.28	0.60	1.14	1.15	2.07	1.20	1.42	-16.0
-25.6	0.02	0.96	1.41	0.93	1.50	0.84	1.38	0.68	1.23	1.25	2.21	1.30	1.53	-14.0
-24.4	0.08	1.05	1.52	1.03	1.61	0.93	1.49	0.77	1.34	1.35	2.35	1.40	1.64	-12.0
-23.3	0.13	1.14	1.63	1.13	1.73	1.03	1.60	0.85	1.44	1.46	2.50	1.51	1.76	-10.0
-22.2	0.19	1.23	1.74	1.23	1.85	1.12	1.72	0.94	1.55	1.57	2.66	1.61	1.88	-8.0
-21.1	0.25	1.34	1.86	1.34	1.98	1.23	1.83	1.03	1.67	1.68	2.81	1.73	2.00	-6.0
-20.0	0.32	1.44	1.99	1.45	2.11	1.33	1.96	1.13	1.79	1.79	2.98	1.84	2.13	-4.0
-18.9	0.38	1.54	2.12	1.56	2.24	1.44	2.09	1.23	1.91	1.91	3.15	1.96	2.26	-2.0
-17.8	0.45	1.66	2.25	1.68	2.38	1.55	2.22	1.34	2.03	2.03	3.32	2.08	2.40	0.0
-16.7	0.52	1.77	2.39	1.80	2.52	1.67	2.36	1.45	2.17	2.16	3.50	2.21	2.54	2.0
-15.6	0.59	1.89	2.52	1.93	2.67	1.79	2.50	1.56	2.30	2.29	3.69	2.34	2.68	4.0
-14.4	0.66	2.01	2.67	2.06	2.82	1.92	2.65	1.68	2.43	2.43	3.88	2.48	2.83	6.0
-13.3	0.74	2.14	2.82	2.20	2.98	2.05	2.80	1.80	2.58	2.57	4.08	2.61	2.99	8.0
-12.2	0.82	2.26	2.97	2.34	3.14	2.18	2.95	1.92	2.72	2.71	4.29	2.76	3.15	10.0
-11.1	0.90	2.40	3.13	2.48	3.31	2.32	3.11	2.05	2.88	2.86	4.50	2.90	3.31	12.0
-10.0	0.99	2.54	3.30	2.63	3.48	2.46	3.28	2.19	3.03	3.01	4.72	3.06	3.48	14.0
-8.9	1.08	2.68	3.46	2.79	3.66	2.61	3.45	2.32	3.19	3.17	4.94	3.21	3.66	16.0
-7.8	1.17	2.82	3.63	2.94	3.84	2.76	3.62	2.46	3.36	3.32	5.17	3.37	3.83	18.0
-6.7	1.27	2.97	3.81	3.11	4.03	2.92	3.80	2.61	3.53	3.49	5.41	3.53	4.01	20.0
-5.6	1.37	3.12	4.00	3.28	4.22	3.08	3.99	2.77	3.71	3.66	5.65	3.70	4.21	22.0
-4.4	1.47	3.28	4.19	3.45	4.42	3.25	4.18	2.92	3.89	3.84	5.90	3.88	4.40	24.0
-3.3	1.58	3.45	4.38	3.63	4.63	3.42	4.37	3.08	4.08	4.02	6.15	4.06	4.60	26.0
-2.2	1.69	3.61	4.58	3.82	4.84	3.60	4.57	3.25	4.27	4.21	6.42	4.23	4.80	28.0
-1.1	1.80	3.79	4.78	4.01	5.05	3.78	4.78	3.42	4.46	4.39	6.69	4.43	5.01	30.0
0.0	1.92	3.97	4.99	4.21	5.28	3.97	4.99	3.59	4.67	4.59	6.97	4.62	5.23	32.0
1.1	2.03	4.15	5.21	4.41	5.51	4.17	5.21	3.78	4.88	4.79	7.26	4.81	5.45	34.0
2.2	2.16	4.34	5.43	4.62	5.74	4.37	5.43	3.97	5.09	5.00	7.55	5.02	5.68	36.0
3.3	2.28	4.53	5.66	4.84	5.98	4.57	5.67	4.16	5.31	5.21	7.86	5.23	5.91	38.0
4.4	2.41	4.73	5.89	5.06	6.23	4.79	5.90	4.36	5.53	5.43	8.17	5.44	6.15	40.0
5.6	2.55	4.93	6.12	5.29	6.48	5.00	6.14	4.56	5.77	5.65	8.48	5.66	6.39	42.0
6.7	2.69	5.14	6.37	5.52	6.74	5.23	6.40	4.77	6.00	5.88	8.81	5.89	6.65	44.0
7.8	2.83	5.35	6.62	5.76	7.01	5.46	6.66	4.99	6.25	6.12	9.14	6.12	6.90	46.0
8.9	2.98	5.57	6.88	6.01	7.28	5.70	6.92	5.21	6.50	6.36	9.48	6.35	7.17	48.0



About Copeland

Copeland, a global provider of sustainable climate solutions, combines category-leading brands in compression, controls, software and monitoring for heating, cooling and refrigeration. With best-in-class engineering and design and the broadest portfolio of modulated solutions, we're not just setting the standard for compressor leadership; we're pioneering its evolution. Combining our technology with our smart energy management solutions, we can regulate, track and optimize conditions to help protect temperature-sensitive goods over land and sea, while delivering comfort in any space. Through energy-efficient products, regulation-ready solutions and expertise, we're revolutionizing the next generation of climate technology for the better. For more information, visit copeland.com.

Scan to visit:



[Copeland.com](https://copeland.com)

To learn more, visit copeland.com

Asia 01 00 Issued 10/2019
©2024 Copeland LP. All rights reserved.

COPELAND