

Cooper-Atkins KwikSwitch Folding Thermocouple Kit


94100

*Make it easy for employees, even new ones,
to cook steaks perfectly to order*

The KwikSwitch is a folding thermocouple instrument featuring a replaceable probe while maintaining a total system accuracy of $\pm 1^{\circ}\text{F}$ ($\pm 0.5^{\circ}\text{C}$). This NSF-certified unit is made of durable ABS plastic and is IPX7 waterproof rated. This easy-to-use device turns on and off by simply flipping the probe open and closed, and includes an automatic shut-off after 10 minutes to conserve battery life. The large, easy to read LCD screen provides a backlit display in low light settings. The reduced tip on the stainless steel probe allows for rapid response times.

Kit includes:

- KwikSwitch Instrument and 53337-K DuraNeedle Direct Connect
- Probe with screw-in flanged connection

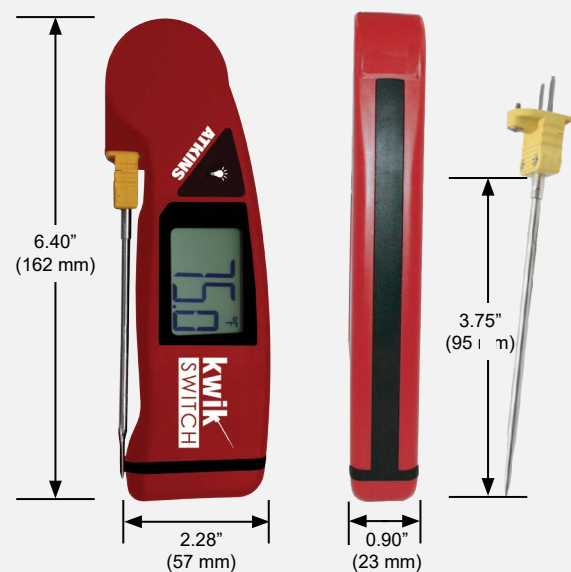

Rubber boot 9418

Wraps around the unit for protection,
sold separately




COOPER-ATKINS



Accuracy to the Highest Degree

- Folding Thermocouple features interchangeable Type-K probes
- Maintains Total System Accuracy when replacing with new 53337-K probe
- Compatible with induction cooking equipment

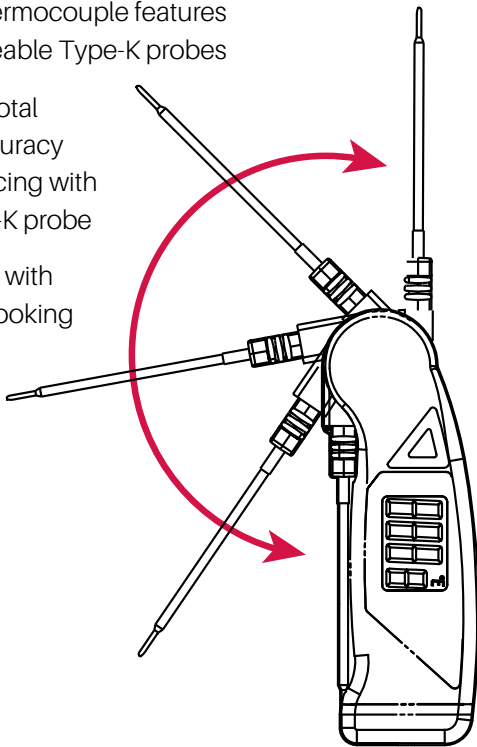

Specifications

94100 KwikSwitch folding thermocouple with probe

- **Temperature Range:** -40° to 500°F (-40° to 260°C)
- **Total System Accuracy:** ±1°F (±0.5°C) from -40° to 212°F (-40 to 100°C)
- **Instrument Accuracy:** ±0.5°F (±0.3°C) from -40° to 212°F (-40 to 100°C)
- **Resolution:** 0.1
- **Display Update Rate:** 0.5 seconds
- **ABS Plastic housing**
- **Folding probe with storage slot for 53337-K probe**
- **Large easy to read LCD with 0.75" digits**
- **Auto Shut-off:** after 10 minutes of inactivity
- **Backlight Display**
- **Low battery indicator**
- **IPX7* waterproof rated** (*submerged 30" for 30 mins)
- **Battery operated** (2 AAA 1.5V Alkaline)
- **Battery Life:** 1000 hours (without backlight active)
- **Limited Warranty:** 5-year instrument



53337-K Replacement DuraNeedle Probe

- **Temperature Range:** -40° to 500°F (-40° to 260°C)
- **Probe Accuracy:** In-field replacement will maintain ± 1°F TSA
- **Response Time:** 1 second (liquid)
- **Probe Length:** 3.75" (95 mm)
- **Probe Diameter:** 0.13" (3.3 mm) with 0.067" (1.70 mm) reduced tip
- **Probe storage slot designed to fit 53337-K probe**
- **Warranty:** Limited 1-year probe warranty

Packaging

- **Individual Package Weight:** 7 oz. (198 grams) w/ probe
- **Package Dimensions:** 5.375" x 9.125" x 1.125" (137 mm x 232 mm x 29 mm)
- **Package Cube:** 0.03
- **Units per Package (6) / Units per master carton (36)**

Copeland Cold Chain LP
67-1700 | V0924

To learn more, visit copeland.com/cooper-atkins

© 2024 Copeland LP.

COOPER-ATKINS